



Cal. AS06A

15.3 × 17.8 mm
H 3.05 mm

Items	Rev.	Page
Specifications	00	1
Appearance	00	2
Casing	00	3
Hand fitting	00	4
Hand setting stem	00	5
Dial-1	00	6-1
Dial-2	00	6-2
Dial-3	00	6-3
Casing ring	00	7
Solar cell unit-1	00	8-1
Solar cell unit-2	00	8-2
Solar cell unit-3	00	8-3
Characteristics	00	9
Attention-1	00	10
Attention-2	00	11
Attention-3	00	12

Date: 31/May/'13

S.EPSON Products

MOVEMENT SPECIFICATIONS

Date: 31/Jan./13

Rev.: 00

CAL. AS06A

Solar Quartz 6 3/4 × 8''' Movement / Three Hands (H/M/S)

1. MOVEMENT DIMENSIONS

Outside diameter	15.30mm(3-9H) × 18.20mm(12-6H)
Casing diameter	15.30mm(3-9H) × 17.80mm(12-6H)
Total height	3.05mm (Including solar cell : 3.45mm)

2. TIME STANDARD

Type of quartz oscillator	Tuning fork
Frequency of quartz oscillator	32,768 Hz
Accuracy	±20 seconds per month (on wrist)
Operating temperature range	−5°C to +50°C
Regulation device	Nil (Pre-adjusted)

3. INDICATOR / FUNCTIONS

3 Hands	Hour / Minute / Second
Reset switch	
Working time	Approx. 2 months (After fully charged)
Setting mechanism	Crown at normal position : Free Crown pulled out 1st click : Time setting / Reset

4. FEATURES

Jewels	0 Jewels
Anti-magnetism	Over 1600A/m (Direct current magnetic field)
Driving current consumption	Approx. 1.64 μA (1.4V)
Operation stopping voltage	1.2 V
Solar cell type	Amorphous silicon solar cell
Maximum unbalance of hands	Second hand : 0.06 μN·m Minute hand : 0.6 μN·m Hour hand : 0.5 μN·m
Moment of inertia	Second hand : less than 0.6 μg·m ²

5. SECONDARY BATTERY (Installed)

Type	Titanium-lithium-ion second battery
Size	φ 6.8mm × t 2.15mm
Nominal voltage	1.5 V
Capacity	2.5 mAh



6. SEPARATED PARTS (Parts code)

Hand setting stem	0354788
-------------------	---------


7. TEST OF ACCURACY

Equipment to be used	SEIKO quartz tester QT-99, Greiner quartz timer-C , Witschi Q-tester 4000
Duration of measurement	10 seconds
Microphone to be used	Electromagnetic detection type

All specifications are subject to change without notice.

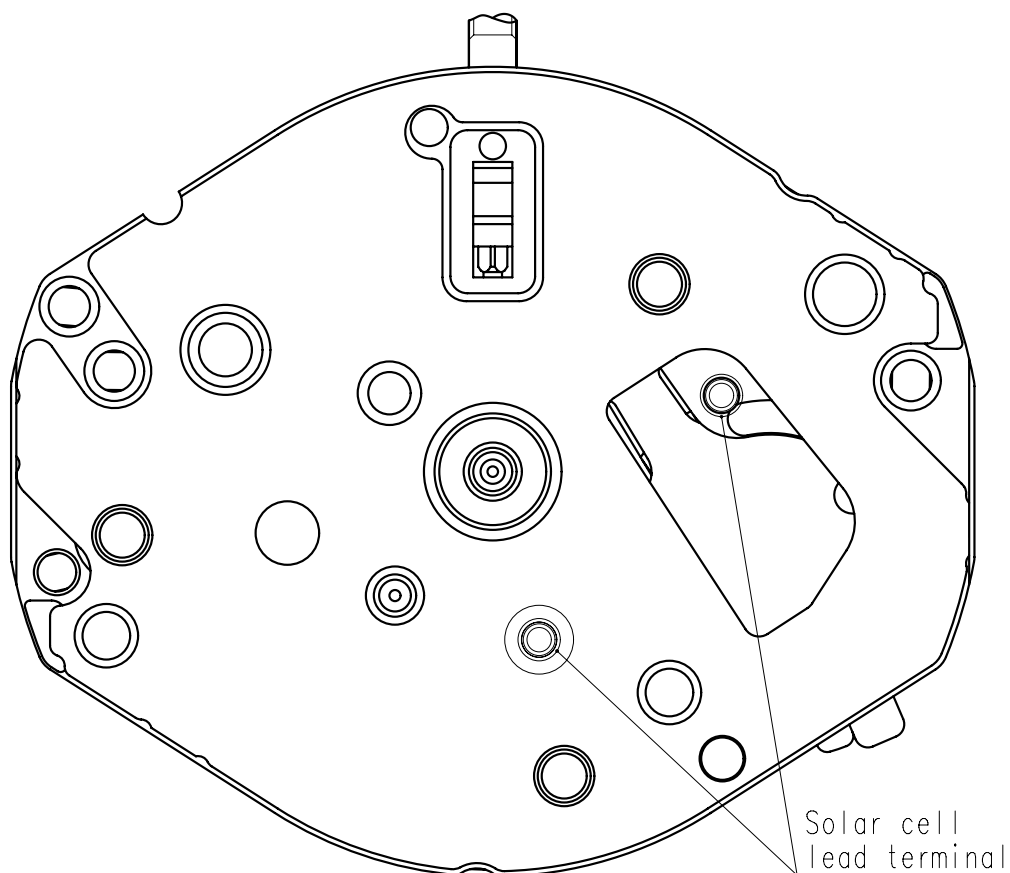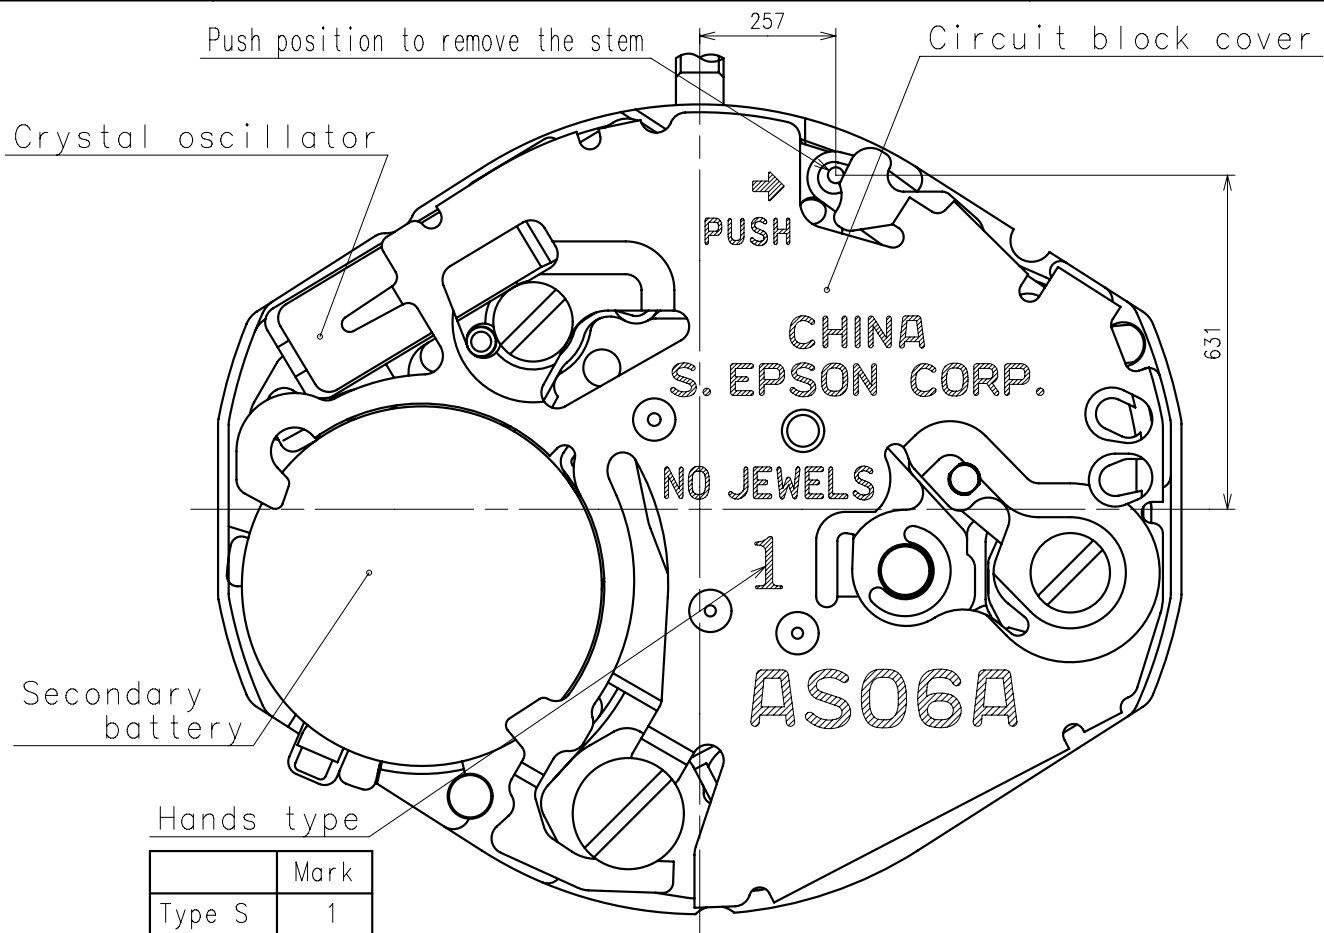


- ※ Hour hand unbalance $\leq 0.5\mu \text{ N} \cdot \text{m}$ ($50\mu \text{ g} \cdot \text{m}$)
- ※ Minute hand unbalance $\leq 0.6\mu \text{ N} \cdot \text{m}$ ($60\mu \text{ g} \cdot \text{m}$)
- ※ Second hand unbalance $\leq 0.06\mu \text{ N} \cdot \text{m}$ ($6\mu \text{ g} \cdot \text{m}$)
- ※ Second hand moment of inertia $\leq 0.6\mu \text{ g} \cdot \text{m}^2$

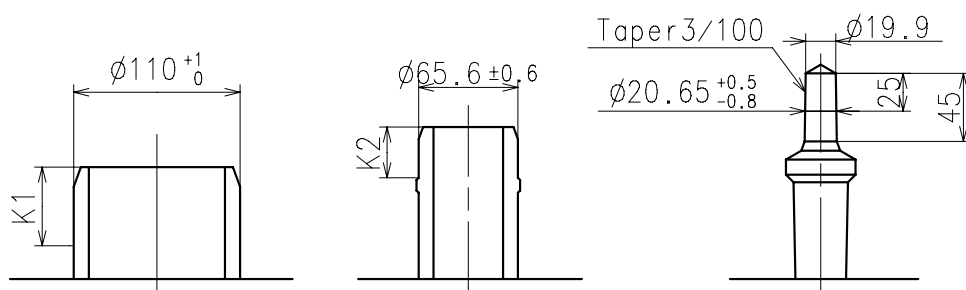


Hour wheel Center wheel Fourth wheel

	Parts No.			Dimension	
	Hour wheel	Center wheel	Fourth wheel	K1	K2
Type S(1) AS06A**	0271764	0221764	0241764	60	33.5

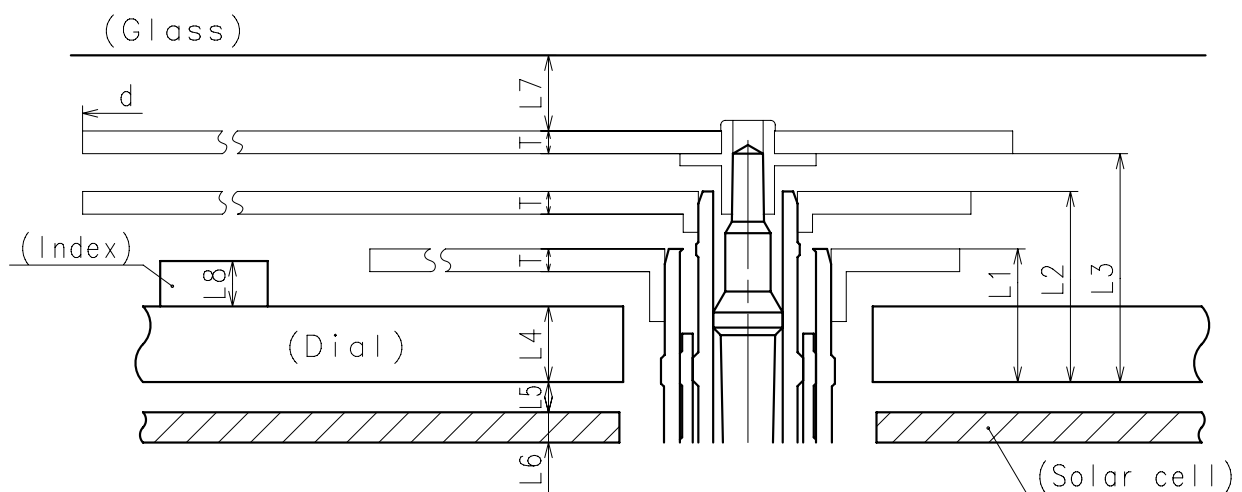

	L1	L2	L3	L4	L5	L6	L7	L8	T	d
Type S(1) AS06A**	88	126	151	50	20	20	MIN: 50	MAX: 30	15	MAX: 2500

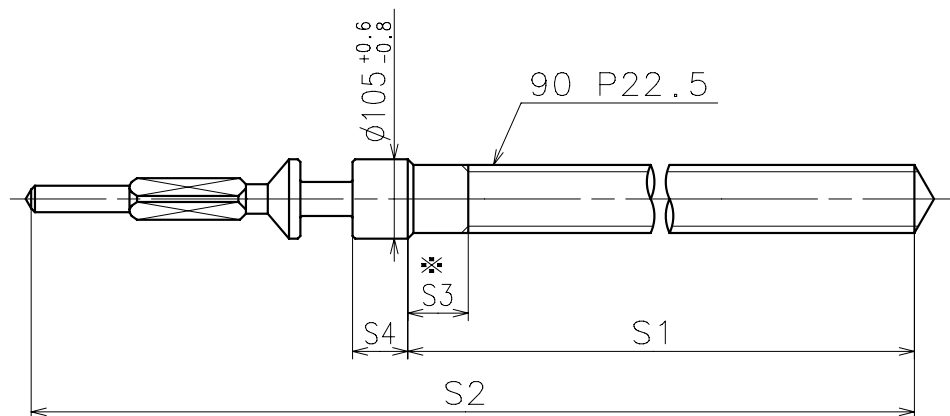


* Not threaded

	Part No.	S1	S2	* S3	S4
Standard	0354788	1427	1925	80	73


Material : Steel

Hardness : Vickers 530±50


Technical drawing of a circular flange. The drawing shows a circular flange with a central hole. The outer diameter is labeled $\phi 2250 \pm 3$. The inner diameter is labeled $\phi 2150 \pm 3$. The flange has a thickness of 83 ± 2 . The central hole has a diameter of $\phi 2150 \pm 3$. The flange is divided into 8 equal segments by radial lines. The angle between adjacent radial lines is 45° . The radial lines are labeled 12H, 3H, and 6H. The flange has a fillet radius of $R15 \max$ at the outer edge and a fillet radius of $R32.5$ at the inner edge. The flange has a chamfer of 65 ± 2 at the outer edge. The flange has a chamfer of 83 ± 2 at the inner edge.

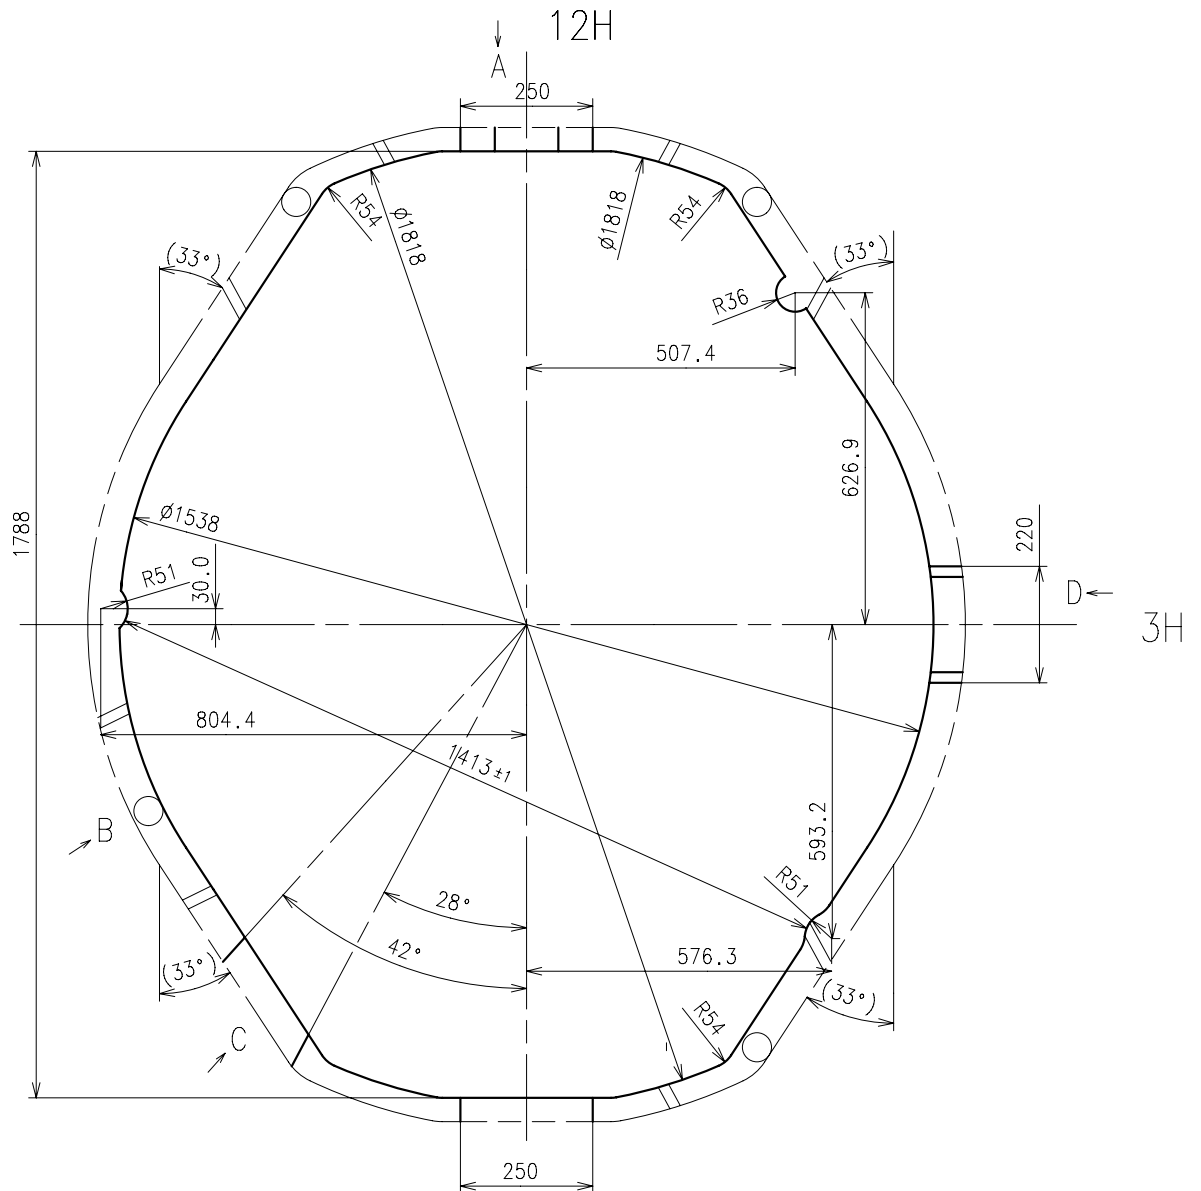


A view

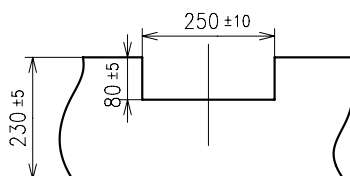


B view

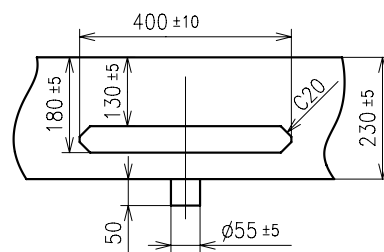


C view



D view

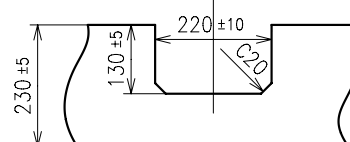


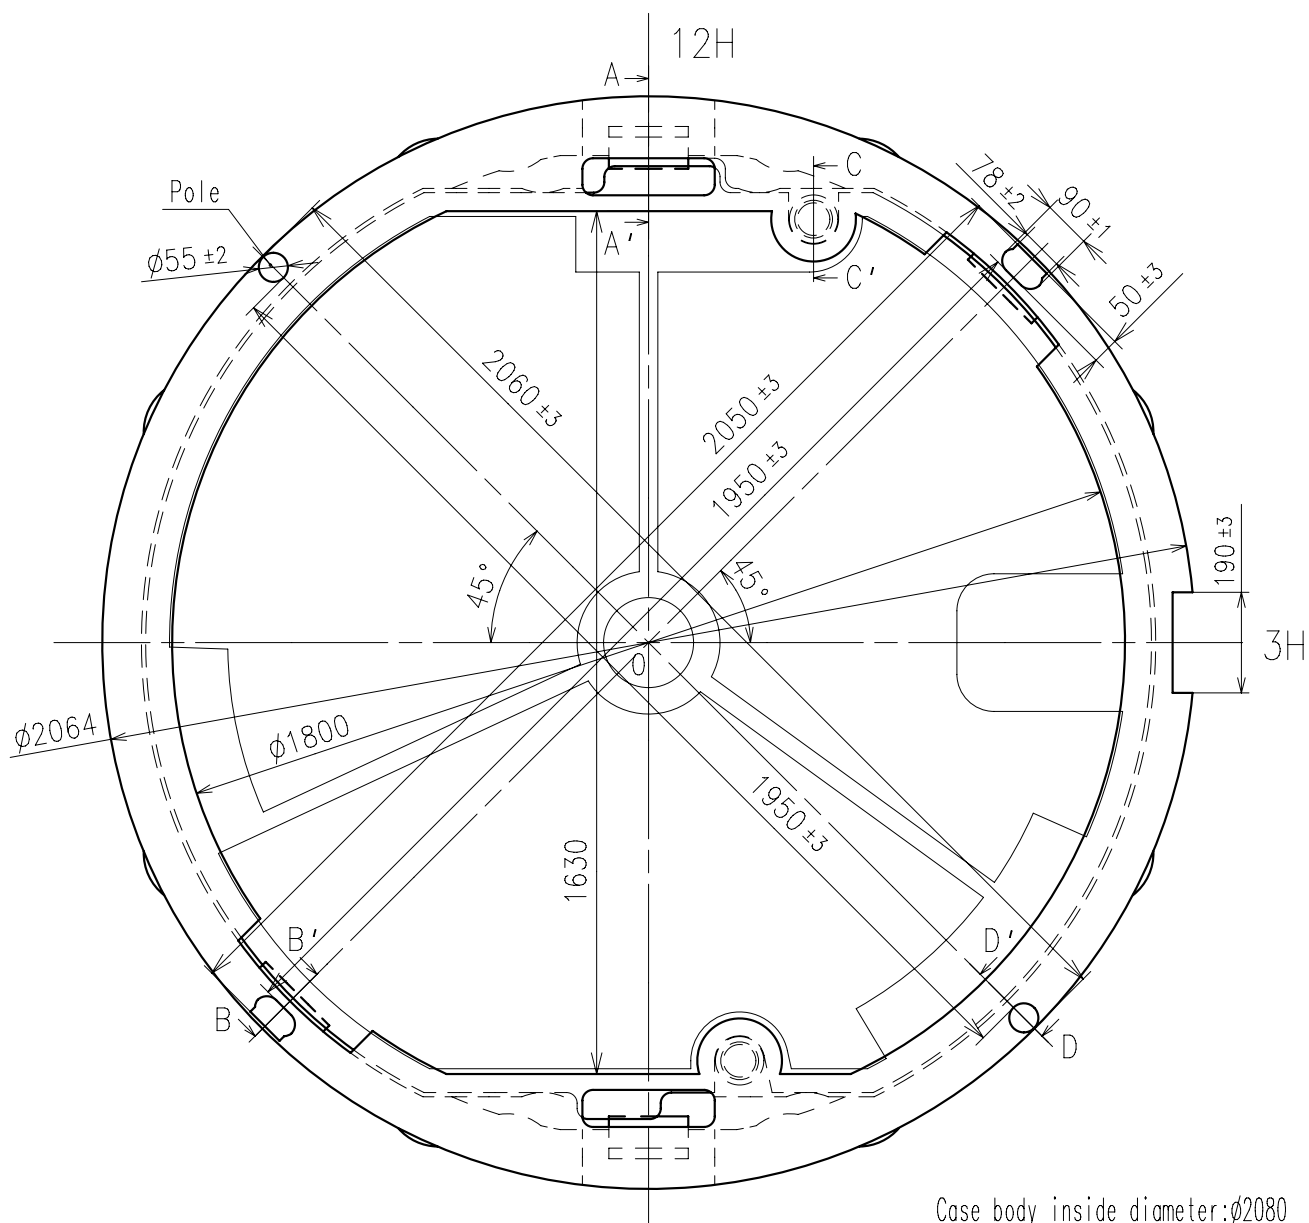


Case body inside diameter: $\phi 2080$

Contacting surface of movement


A-A' section

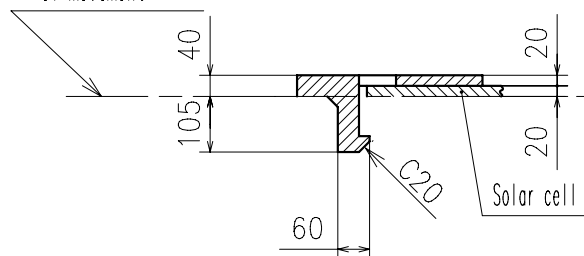


B-B' section



C-C' section

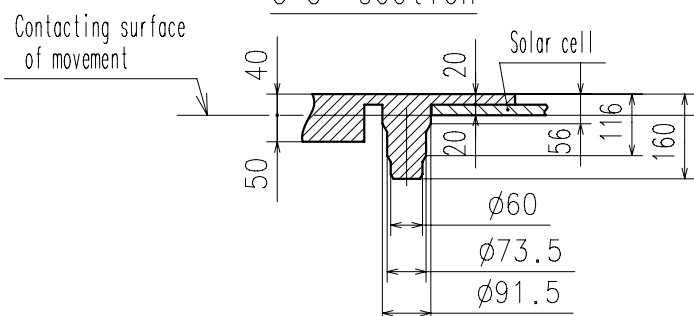

D-D' section



AS06A Characteristics

Date : 31/Jan./13

Rev. : 00

1. Solar-powered watch

This watch is a solar-powered watch containing a solar cell underneath the dial to convert any form of light into " electrical energy" and store the power in a secondary battery.

2. Eliminating the need for battery replacement

Unlike conventional quartz watches, this watch does not use a silver oxide battery, thus eliminating the need for battery replacement.

3. Working time

Expected life per charge from full charge to stoppage will be around 2 months.

4. Eco-friendly

The secondary battery is Titanium-lithium-ion battery without any environmentally harmful substances.

AS06A Attention-1

Date : 31/Jan./'13

Rev. : 00

1. How to pull out the setting stem

When you pull out the setting stem, please put the stem at normal position and push the "setting lever" by tweezers.

The "setting lever" can not be push if the setting stem is not at normal position.

2. Attention for solar cell unit

Please pay attention not to scratch the surface of solar cell unit.

3. Attention for dial transparency rate

Please use the dial with transparency rate more than 40%.

(Effective aperture is ϕ 1.9mm)

4. The guideline of charging time is as in below

(Dial transparency rate = 40%)

Illumination (Lx)	Source of light	Environment	A (Approx. Hours)	B (Approx. Hours)	C (Approx. Minutes)
700	A fluorescent lamp	Inside the office	—	45	132
3,000		30W 20cm	60	4	33
10,000	Sun light	Cloudy	20	1.5	11
100,000		Fine weather	5	15 minutes	2.5

* For reference: 1,000Lx is 70cm under from 30W fluorescent lamp

Condition A : Time required for full charge

Condition B : Time required for steady operation

Condition C : Time to charge 1 day of power

5. Caution

When charging the watch, do not place it too close to fluorescent lamp or other light sources as the watch temperature will become extremely high, causing damage to the parts inside the watch.

6. Secondary battery unit replacement


Please set the exclusive secondary battery unit.

If the silver oxide battery is accidentally be set and charged, there is a possibility of battery explosion.


To prevent the battery explosion, it is adopted safety structure not to charge the silver oxide battery even if it is accidentally be set.

When the secondary battery is assembled, please match the phase in accordance with this illustration and push the battery vertical direction.

Please pay attention not to bend the solar cell lead terminal.

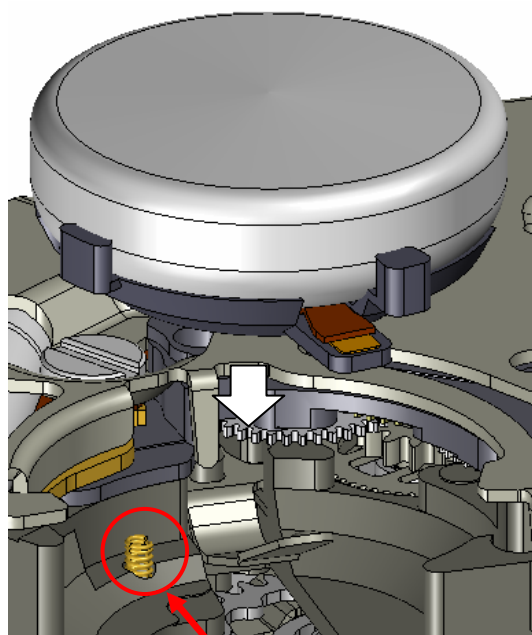



Solar cell lead

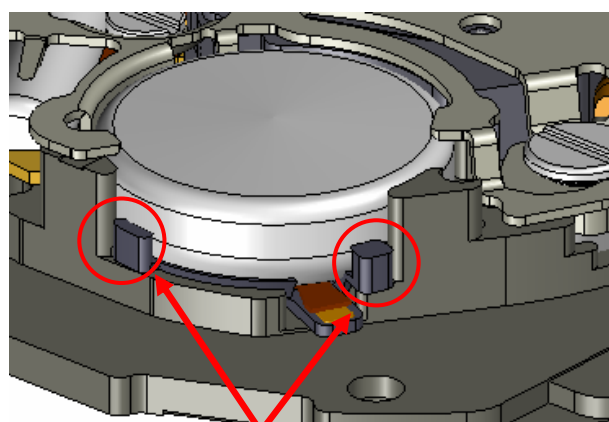

Setting position

When the secondary battery is disassembled, please broaden the spring of circuit block cover toward the (⇒) direction and remove the battery in accordance with this illustration.

Please refrain from touching the diode element on the back side of the secondary battery.

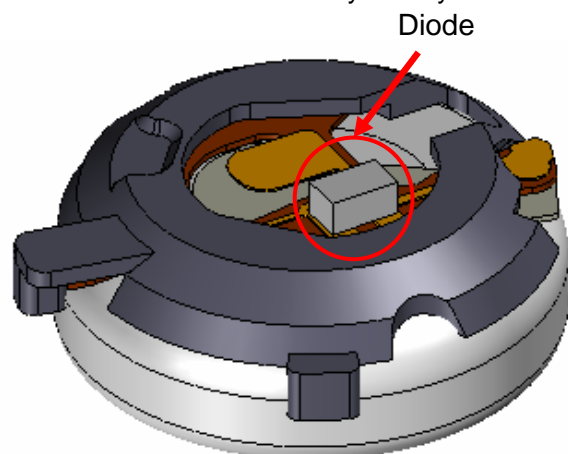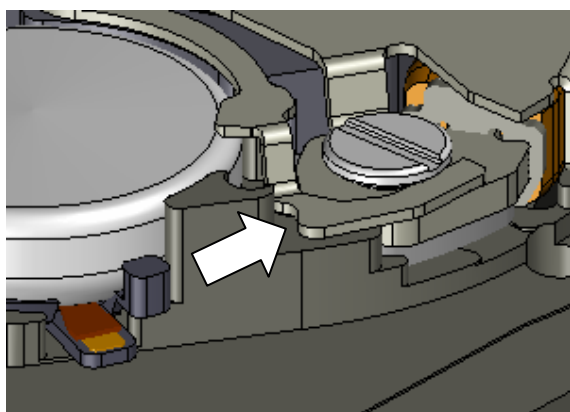

AS06A Attention-3

Date: 31/Jan./'13

Rev.: 00

7.Attention for hands disassemble

When the hand is disassembled, please be sure to hold the dial.

If the hand is disassembled without holding the dial, it may have a possibility to break the movement.

