








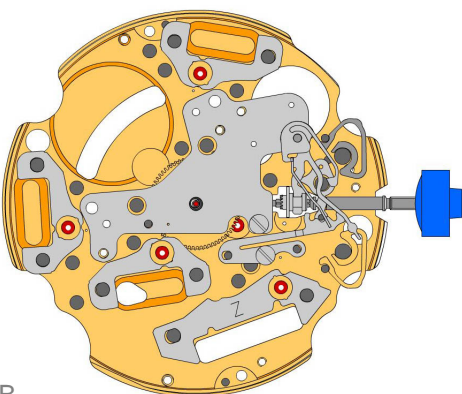








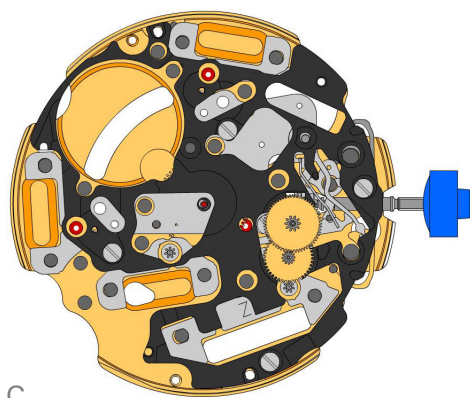


A



B

2000.574.G 1.		Main plate
3305.275.CO 2.		Cannon pinion with driver (Aig.1)
2030.017.CO 3.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 4.		Screw
3001.055.FI 5.		Sliding pinion
3000.177.CO 6.		Setting stem
3017.049 7.		Setting lever
3905.049 8.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 9.		Screw
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h and chrono)
3622.039 16.		Stator (counter 6h, 9h and chrono)
3622.039 17.		Stator (counter 6h, 9h and chrono)



C


3603.079  
18.  Plastic bracket  
Plastic bracket held by 4 screws 4000.250.


4000.250  
19.  Screw

3715.094.RK  
20.  Rotor


3715.094.RK  
21.  Rotor


3147.046.CO  
22.  Intermediate wheel

3136.142.CO  
23.  Second wheel (long)

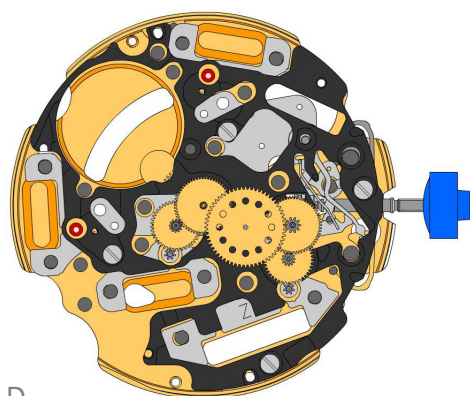


D


3147.047.CO  
24.  Intermediate wheel (chrono)

3136.143.CO  
25.  Chronograph wheel (Aig.1)


3122.056.CO  
26.  Third wheel

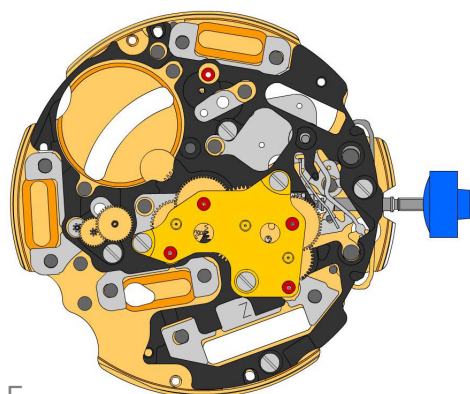


E


2020.148.G  
27.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.

4000.250  
28.  Screw


3715.095.RK  
29.  Rotor  
Parts 3612.144.5030, 3715.095.RK and 3147.048.CO must be exchanged together.

3147.048.CO  
30.  Intermediate wheel (counter)  
Parts 3612.144.5030, 3715.095.RK and 3147.048.CO must be exchanged together.

3402.006.CO  
31.  Minute counting wheel

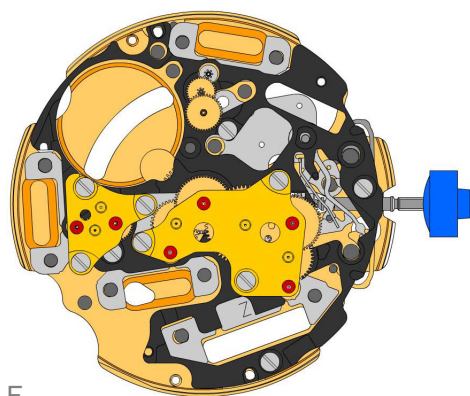


F


2020.149.G  
32.  Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
33.  Screw


3715.095.RK  
34.  Rotor

3147.059.CO  
35.  Intermediate wheel (counter 12h)


3402.006.CO  
36.  Minute counting wheel

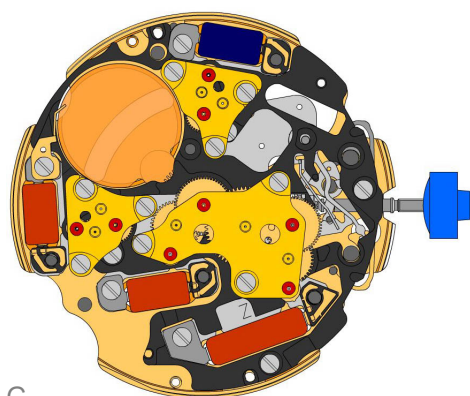



G


2020.149.G  
37.  Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
38.  Screw

3621.053.RK  
39.  Coil  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
40.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
41.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.


3621.055.RK  
42.  Coil (counter 6h)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250  
43.  Screw


3601.118  
44.  Contact strip  
Contact strip held by 1 screw 4000.250.

4000.250  
45.  Screw

3603.034  
46.  Battery insulator

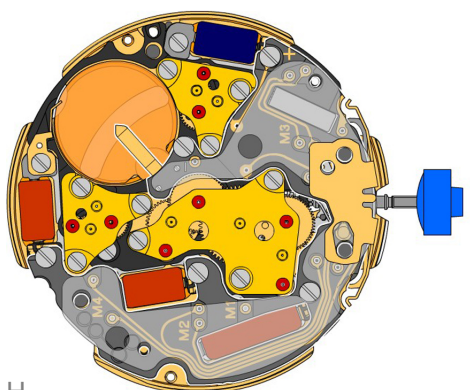


H

3612.144.5030  
47.  Electronic module  
Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now. Parts 3612.144.5030, 3715.095.RK and 3147.048.CO must be exchanged together.

4000.248  
48.  Screw

3603.069  
49.  Circuit insulator

3601.107.G  
50.  Pusher contact spring

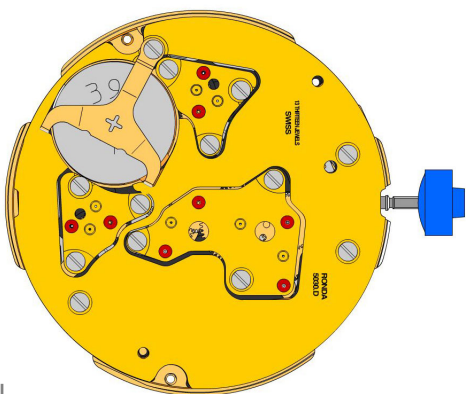


2130.137.G.M01.5030D  
51.  **Electronic module cover**  
Electronic module cover held by 3 screws 4000.250.





3600.010.HGF  
52.  **Battery 395**


3601.109.G  
53.  **Bridle +**  
Bridle held by 1 screw 4000.250.

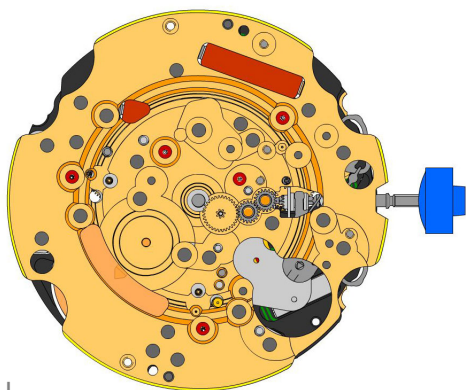4000.250  
54.  **Screw**







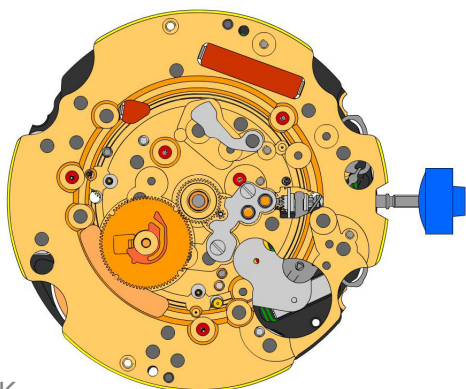


J

2000.574.G 55.		Main plate
3004.164 56.		Setting wheel
3004.164 57.		Setting wheel
3007.054.CO 58.		Minute wheel






K

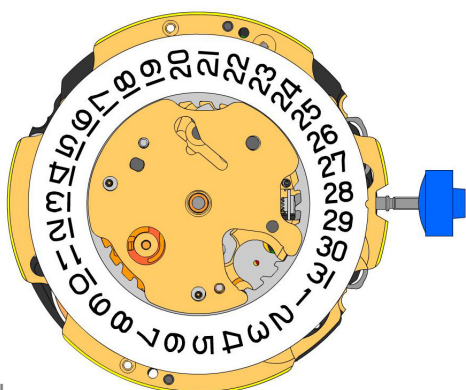2130.143 59.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 60.		Screw
3301.241 61.		Hour wheel (Aig.1)
3315.016 62.		Friction spring
3004.224.CO 63.		Date indicator driving wheel
3500.049 64.		Date jumper







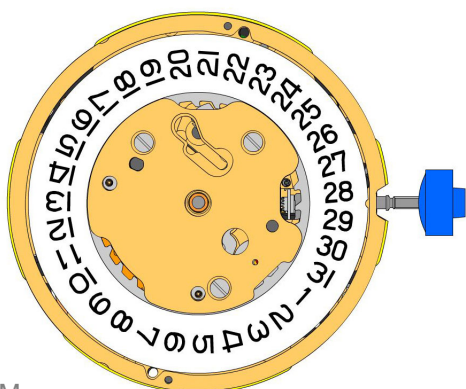



L


3504.208.AB.1.A 65.		Date indicator (standard) Nick of the indicator at 3 o'clock.
2130.141 66.		Date indicator maintaining plate Date indicator maintaining plate held by 1 screw 4000.250.




M

3905.070 67.		Date jumper spring Insert the date jumper spring in the provided opening.
2130.140.G 68.		Date mechanism maintaining plate Date mechanism maintaining plate held by 2 screws 4000.250.
4000.250 69.		Screw
3506.072.G 70.		Dial support
8200 71.		Moebius 8200
9014 72.		Moebius 9014
124 73.		Jismaa 124
9020 74.		Moebius 9020



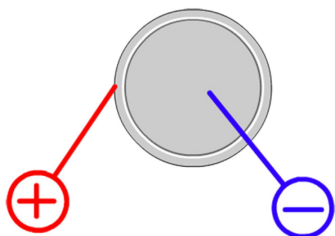


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

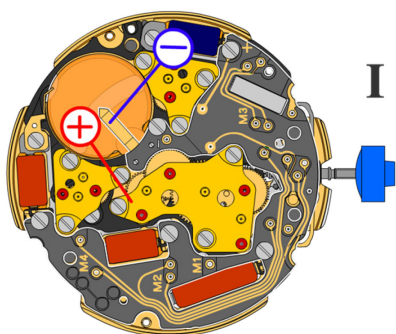


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.32 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Instantaneous rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.30 V</b>

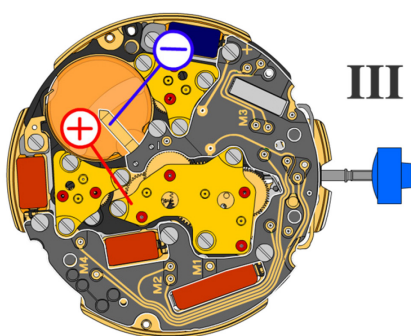

*Setting stem in position III, 60 s measuring interval:*

Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

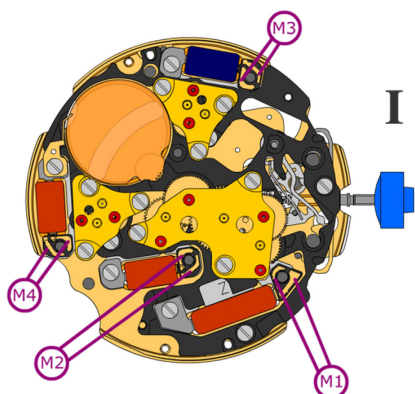


Coil resistance M1 **1.90 k $\Omega$  .. 2.10 k $\Omega$**


Coil resistance M2 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

Coil resistance M3 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

Coil resistance M4 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

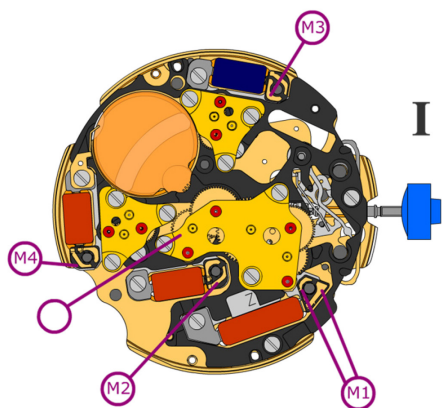

Coil resistance M1/M2/M3/M4  **$\infty$  k $\Omega$**

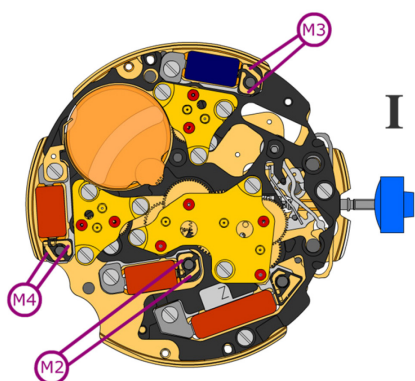

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit  
M2/M3/M4 **1.30 V**