

Cal. VC01E

14.50 mm

[12H --- 6H]

10.80 mm

[3H --- 9H]

H 2.38 mm

Item	Version No.
Specification	Version 2
Appearance	Version 4
Casing	Version 5
Hand Fitting	Version 5
Hand Setting Stem	Version 5
Dial - 1	Version 4
Casing Ring - 1	Version 2
Casing Ring - 2	Version 2
Assembly Plan	Version 4
Hands	Version 3



MOVEMENT SPECIFICATIONS

CAL.VC01E 4 3/4 Ligne Quartz Movement Three Hands

1. MOVEMENT DIMENSIONS

- Outside diameter ϕ 14.50mm (12H~6H) x 10.80mm (3H~9H)
- Casing diameter ϕ 13.90mm (12H~6H)
- Total height 2.38 mm (including the battery)

2. TIME STANDARD

- Type of quartz oscillator Tuning fork
- Frequency of quartz oscillator 32,768 H Z
- Accuracy Monthly rate: Less than 20 seconds per month at normal temperature range
- Regulation device Nil
- Regulation hands unbalance
 - Second : Less than 0.045 μ N·m (4.5mg·mm)
 - Minute : Less than 0.40 μ N·m (40mg·mm)
 - Hour : Less than 0.60 μ N·m (60mg·mm)

3. BATTERY

- Type Silver oxide battery
- Size ϕ 5.8 x t 2.1 (mm)
- Battery life Approx. 2 years
- Recommended battery SR521SW (SEIZAIKEN)

4. STEPPING MOTOR

- Type Two pole stepping motor
- Step 180° every second

5. JEWEL

0 jewel

6. ANTIMAGNETISM (direct current magnetic field)

≥ 1600 A / m

7. SHOCK RESISTANCE

On equal level with general quartz movement

8. OPERATING TEMPERATURE RANGE

From - 5°C to + 50°C

9. SETTING MECHANISM

- Crown at normal position Free
- Crown pulled out to 1st click Time setting, second setting and reset switch

10. TEST OF ACCURACY

- Equipment to be used Quartz Tester QT - 99
Greiner Quartz Timer - C
Witschi Q-Tester 4000
- Duration of measurement 10 seconds
- Microphone to be used Electromagnetic detection type (DM-1)

11. ATTACHED PARTS



Parts Name	Parts Code
Silver oxide battery	3016 - 1410
Hand setting stem	0351-1730 (Regular) / 0351-1200 (Long)
Hour wheel	0271 - 2980
Dial washer	0491 - 0130

*** All specifications are subject to change without notice.**

Appearance

Cal. VC01E

	*
TYPE M	2
TYPE L	3

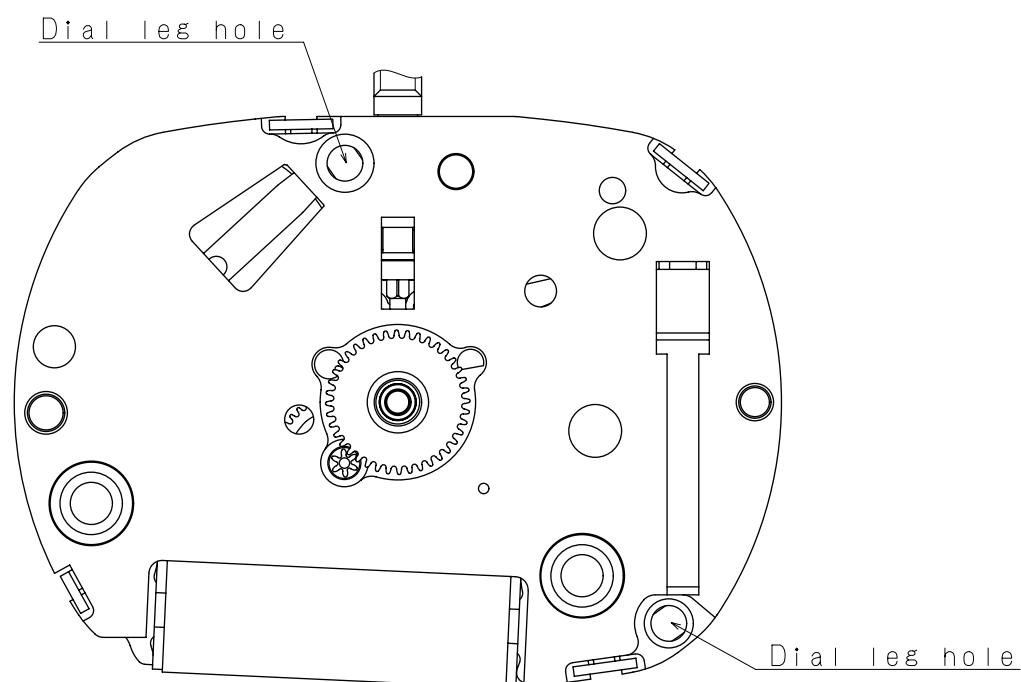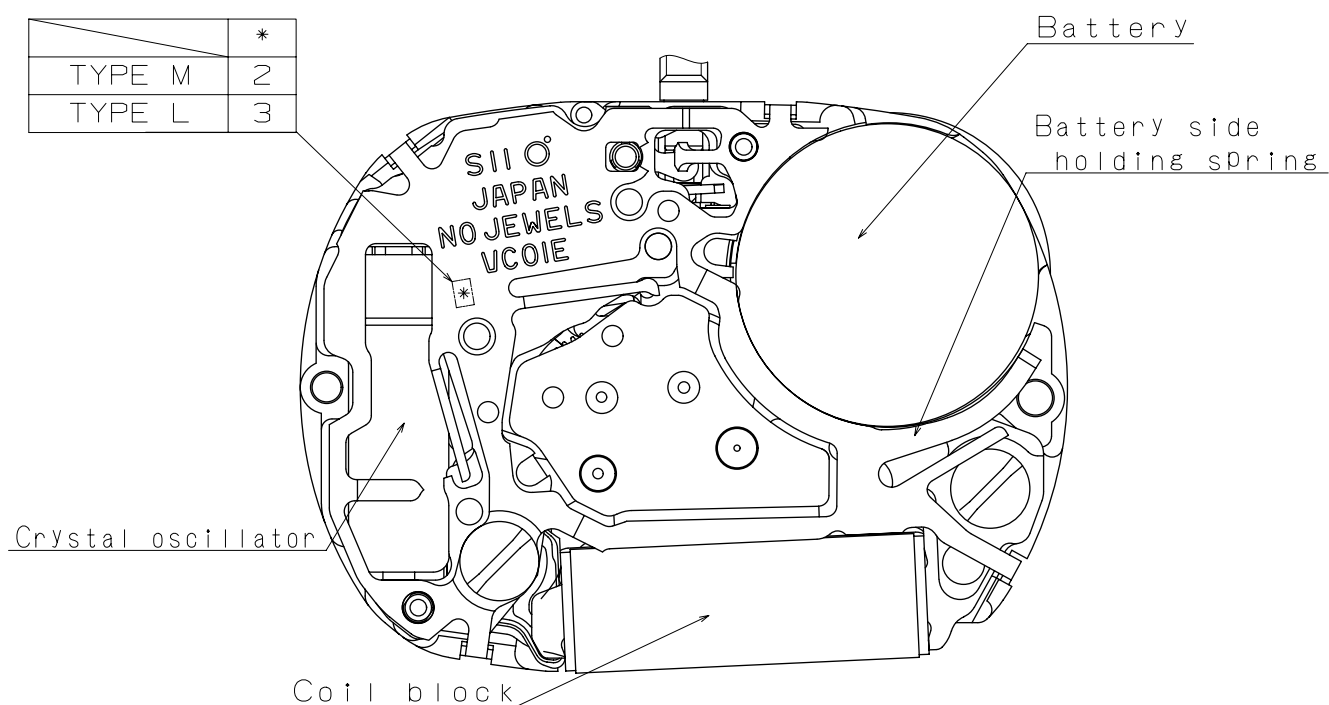

Scale : 7/1


Unit : 1=1/100mm

Version:4

Casing


Cal. VC01E

Battery Side holding spring Type. * Pull out stroke 40

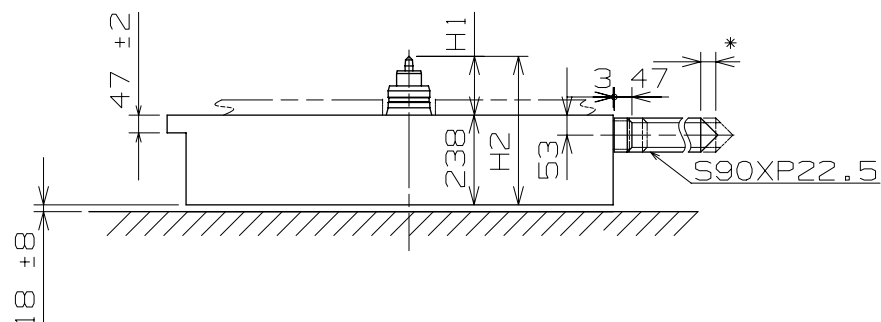

Center post		TYPE M	TYPE L
Maximum height from main plate surface	H1	155	185
Total height incl. movement	H2	393	423

Hand Setting Stem	TYPE A	TYPE B
L1	1648	2140

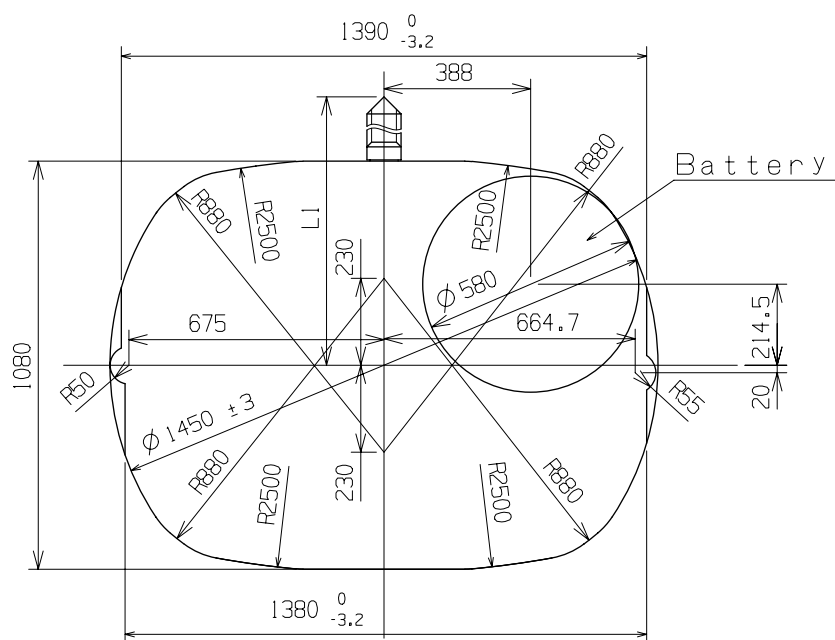


Scale : 5/1
Unit : 1=1/100mm

Version:5

Casing


Cal. VC01E

Battery Side holding spring Type. * Pull out stroke 40

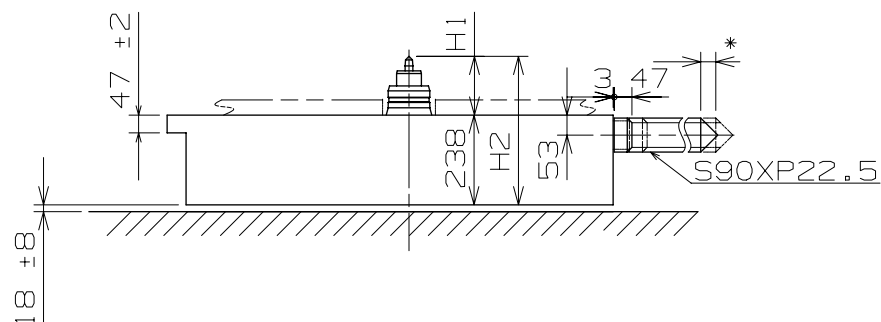

Center post 中心柱位		TYPE M 一般針高	TYPE L 高針
Maximum height from main plate surface. 與機芯平面之最大高度	H1	155	185
Total height incl. movement. 機芯總高度	H2	393	423

Hand Setting Stem	TYPE A	TYPE B
L1	1648	2140

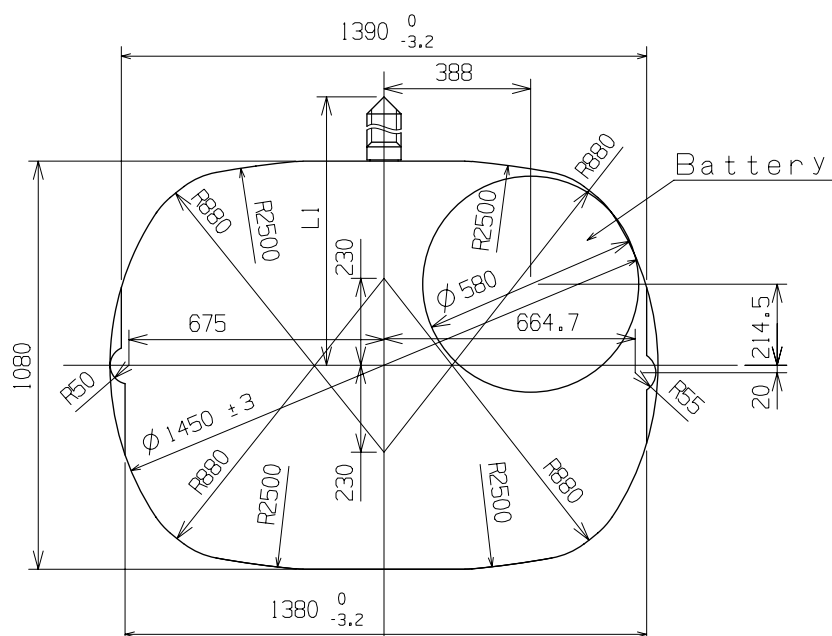

Scale : 5/1
Unit : 1=1/100mm

Version:5




Hand fitting

Cal. VC01E


Hour hand unbalance $\leq 0.6 \mu\text{N} \cdot \text{m}$ ($60\text{mg} \cdot \text{mm}$)

Minute hand unbalance $\leq 0.4 \mu\text{N} \cdot \text{m}$ ($40\text{mg} \cdot \text{mm}$)

Second hand unbalance $\leq 0.045 \mu\text{N} \cdot \text{m}$ ($4.5\text{mg} \cdot \text{mm}$)

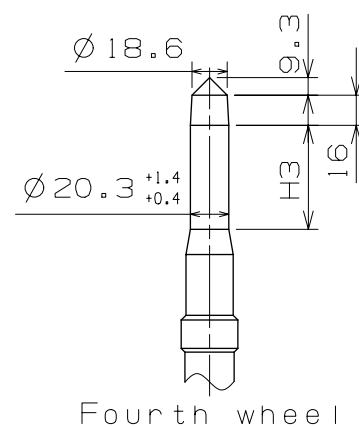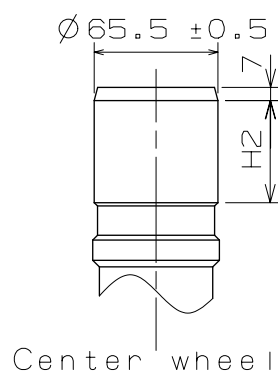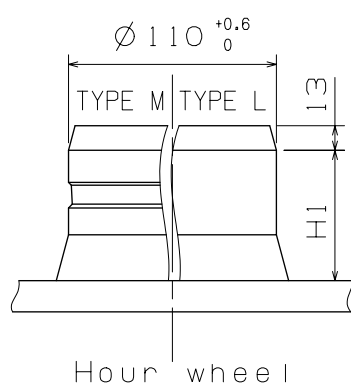

	Part. No.			Dimension		
	Hour wheel	Center wheel	Fourth wheel	H1	H2	H3
TYPE M	0271 2980	0270 2980	0241 1330	69	54	55
TYPE L	0271 3040	0270 1300	0241 3930	99	57	85

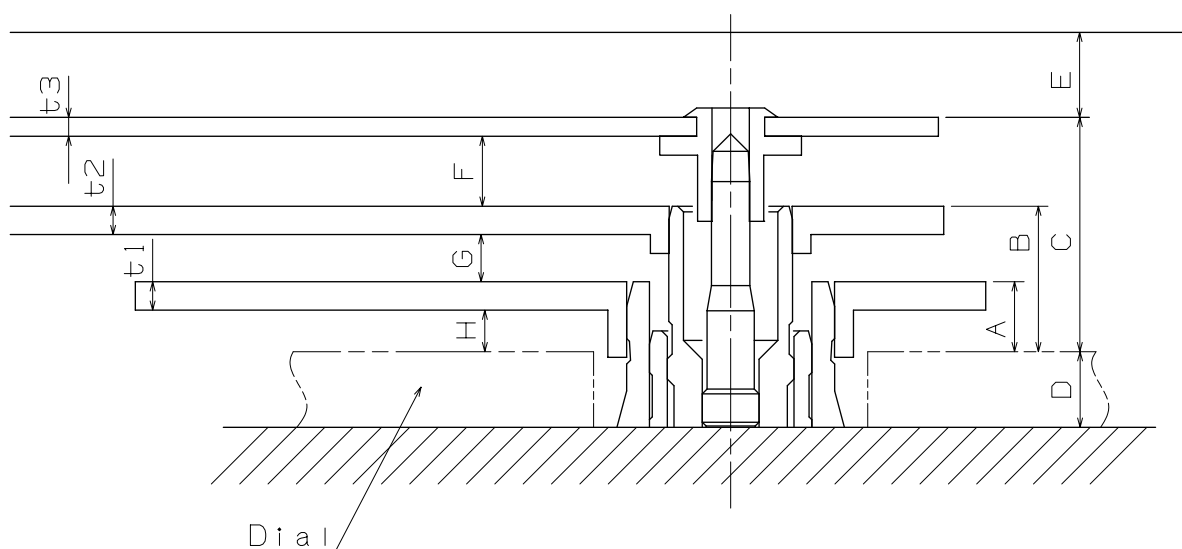

	A	B	C	D	E	F	G	H	t1	t2	t3
TYPE M	37	77	124	40	45	37	25	22	15	15	10
TYPE L	35	78	122	72	45	34	28	20	15	15	10

Scale : 25/1


Unit : 1=1/100mm

Version:5


Hand fitting

Cal. VC01E

Hour hand unbalance $\leq 0.6 \mu\text{N}\cdot\text{m}$ ($60\text{mg}\cdot\text{mm}$)
 Minute hand unbalance $\leq 0.4 \mu\text{N}\cdot\text{m}$ ($40\text{mg}\cdot\text{mm}$)
 Second hand unbalance $\leq 0.045 \mu\text{N}\cdot\text{m}$ ($4.5\text{mg}\cdot\text{mm}$)

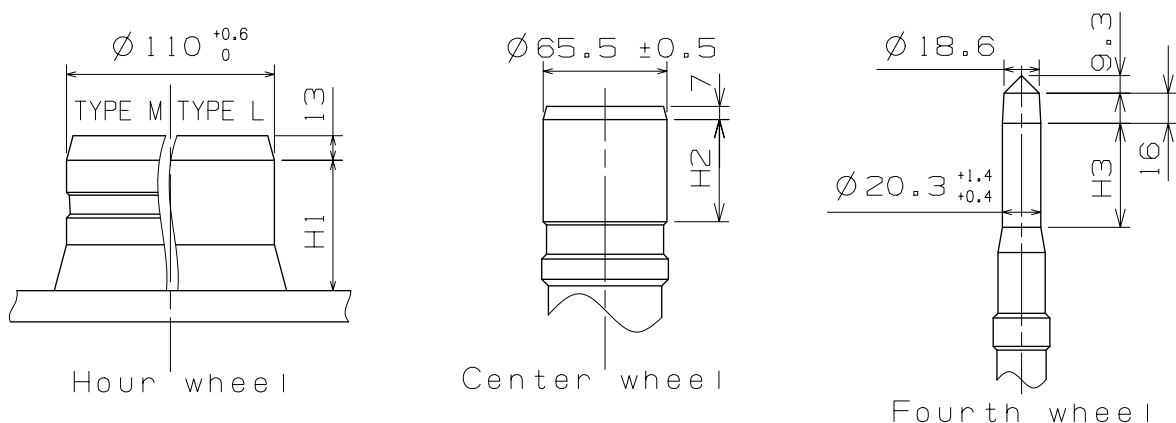

	Part. No.			Dimension		
	Hour wheel 時針輪	Center wheel 分針輪	Fourth wheel 秒針輪	H1	H2	H3
TYPE M 一般針高	0271 2980	0270 2980	0241 1330	69	54	55
TYPE L 高針	0271 3040	0270 1300	0241 3930	99	57	85

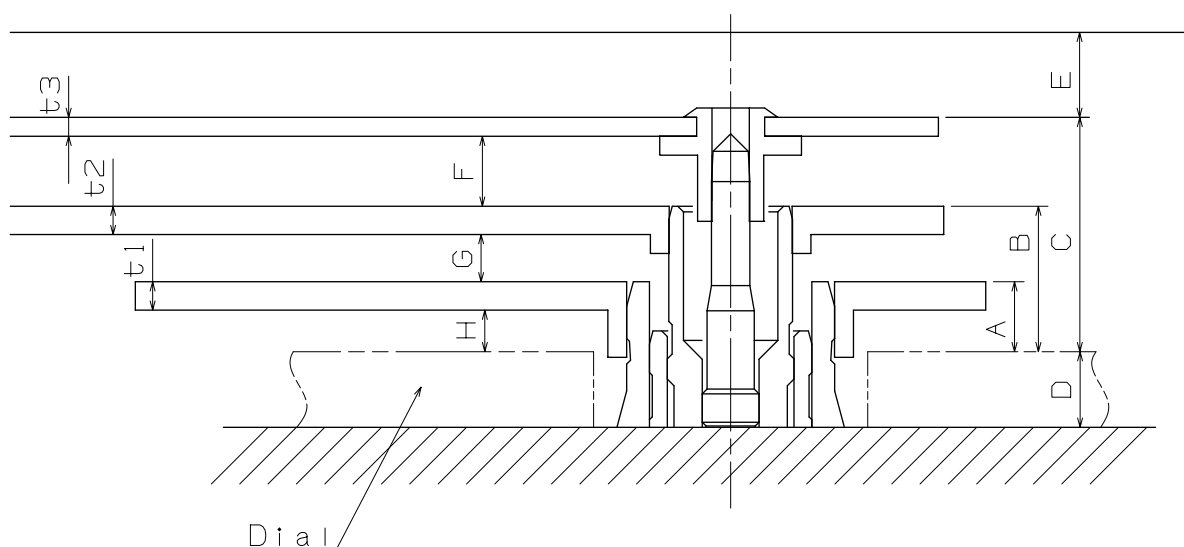


	A	B	C	D	E	F	G	H	t1	t2	t3
TYPE M 一般針高	37	77	124	40	45	37	25	22	15	15	10
TYPE L 高針	35	78	122	72	45	34	28	20	15	15	10

Scale : 25/1

Unit : 1=1/100mm

Version:5

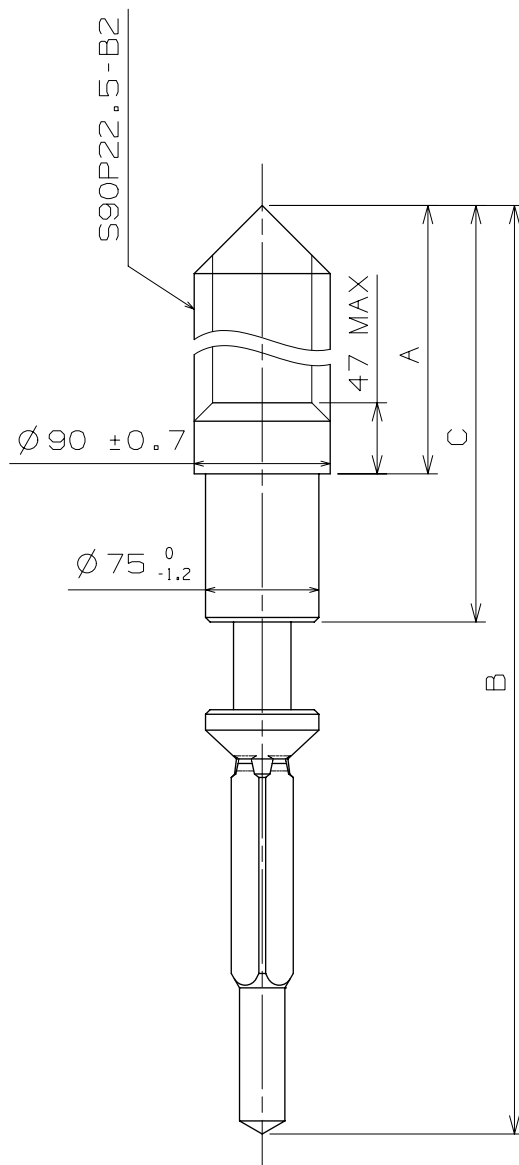

	Part.No.	A	B	C
TYPE A	0351 1730	1105	1542	1203
TYPE B	0351 1200	1597	2034	1695


Scale : 20/1

Unit : 1=1/100mm

Version:5

Dial - 1

Cal. VC01E

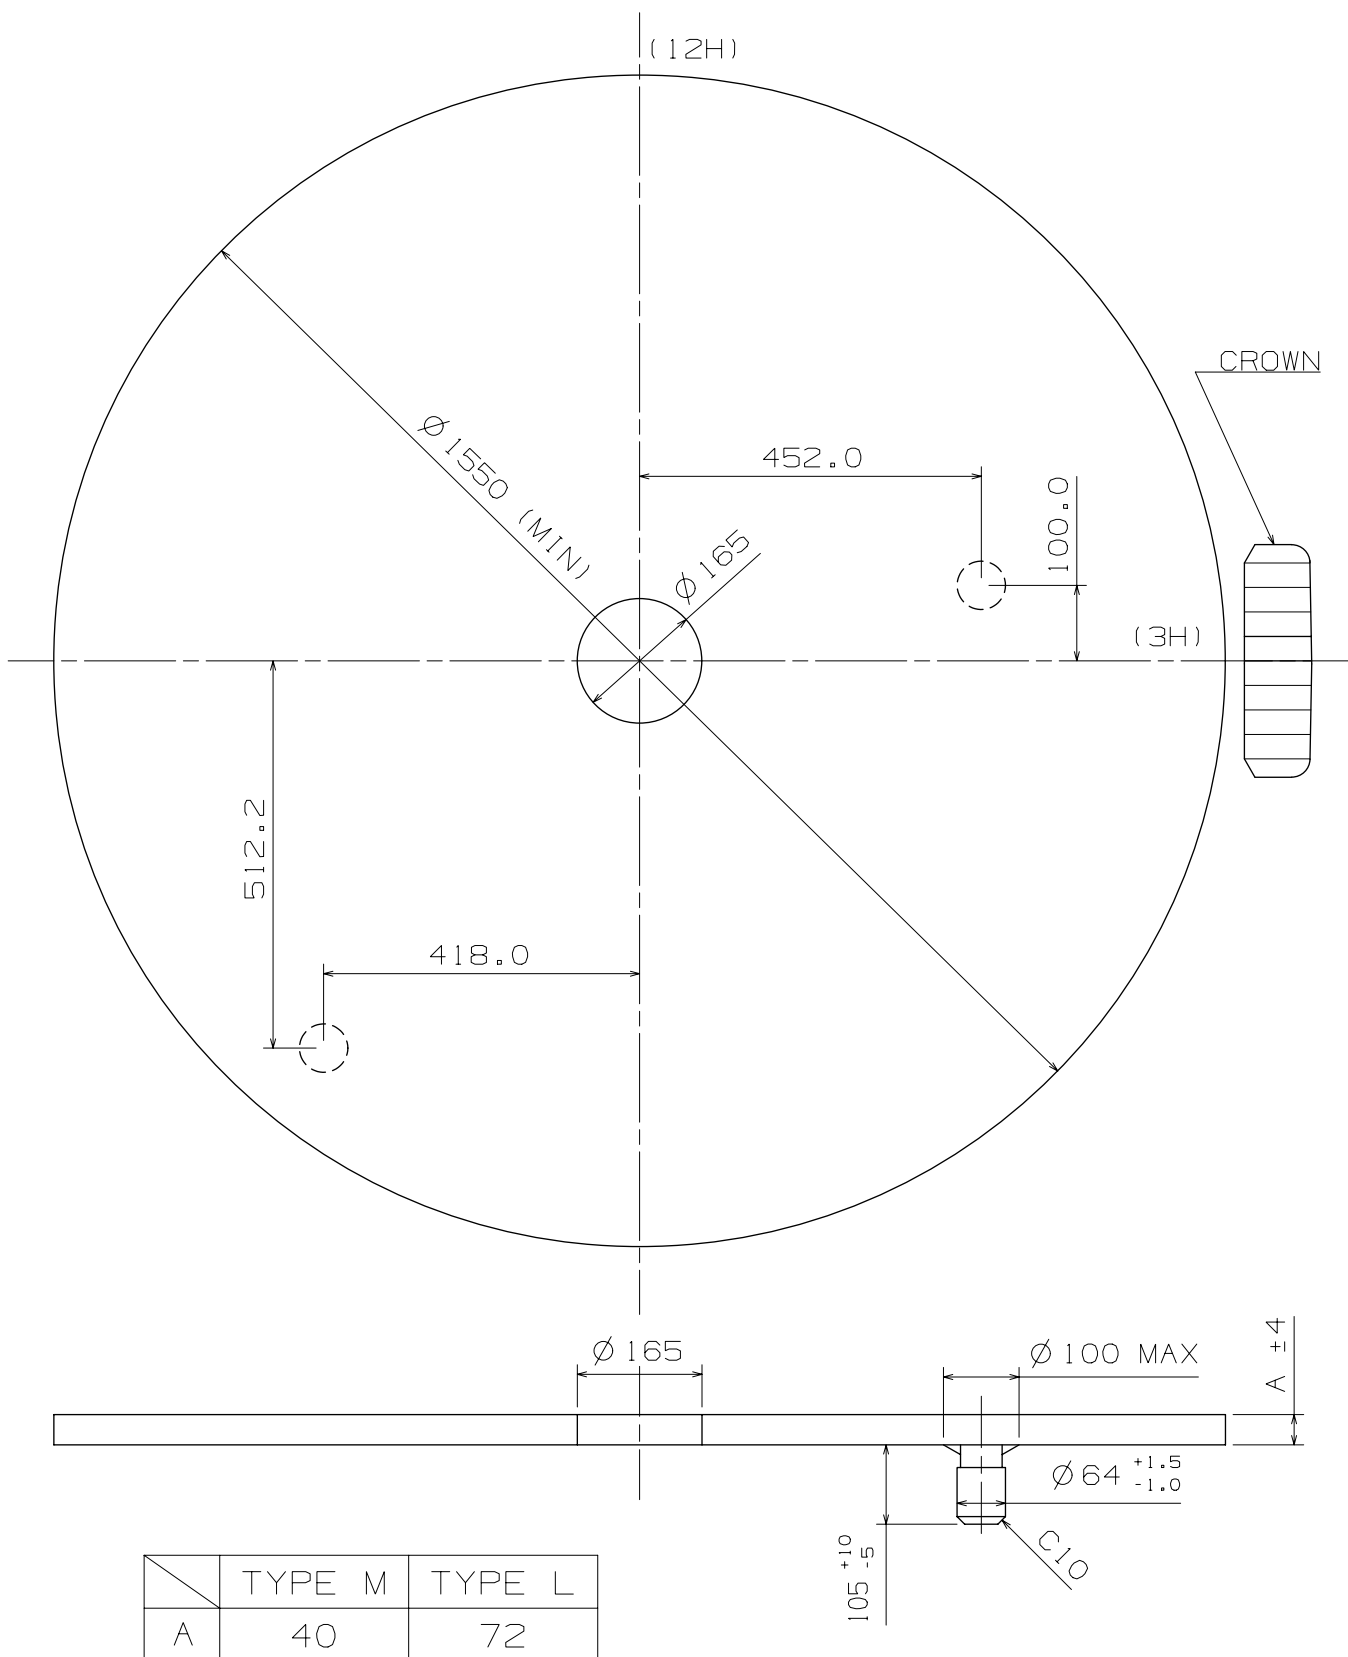

Scale : 10/1



Unit : 1=1/100

Version:4

Casing Ring-1

Cal. VC01E

	X	Y
C	0.00	0.00
1A	202.41	174.30
1B	532.50	290.00
1C	313.37	408.84
1D	212.28	383.98
1E	0.00	680.00
1F	-235.18	428.13
1G	-442.14	438.08
1H	-532.50	290.00
1J	-455.42	-195.67
1K	-532.50	-290.00
1L	-182.96	-339.98
1M	0.00	-675.00
1N	0.00	-680.00
1P	330.00	-395.38
1R	532.50	-290.00
1S	515.00	-168.75

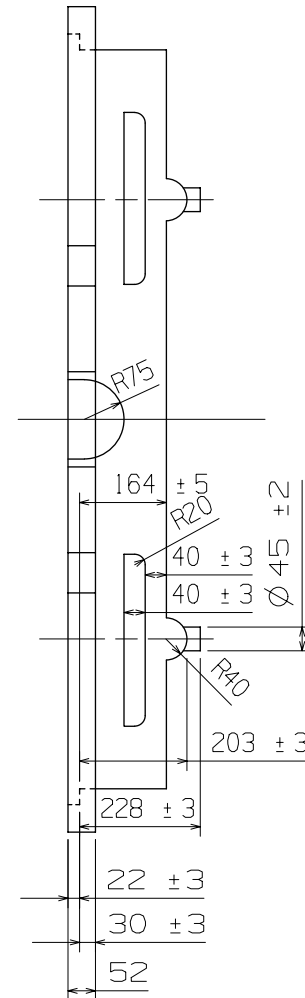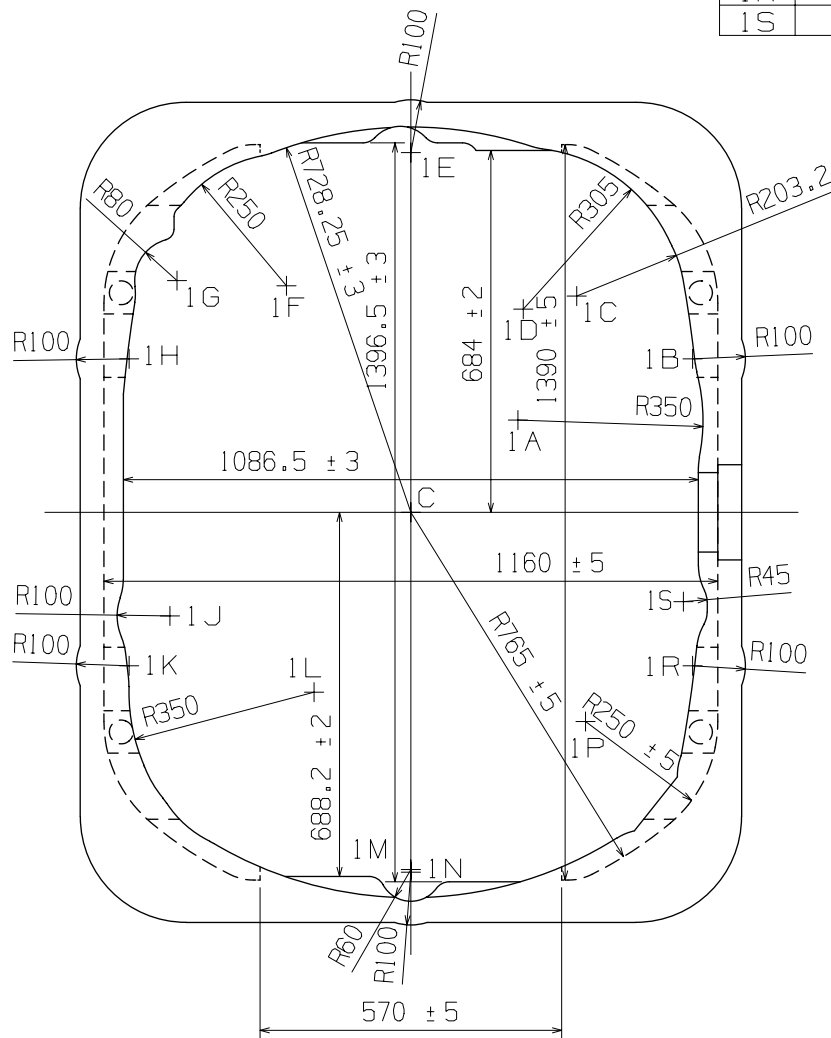


Scale : 7/1
Unit : 1=1/100

Version:2

Casing Ring-2

Cal. VC01E

	X	Y
C	0.00	0.00
1A	202.41	174.30
1B	532.50	290.00
1C	212.28	383.98
1D	0.00	680.00
1E	-235.18	428.13
1F	-467.69	534.76
1G	-442.14	438.08
1H	-532.50	290.00
1J	-643.25	-126.97
1K	-455.42	-195.67
1L	-638.58	-276.00
1M	-532.50	-290.00
1N	-182.96	-339.98
1P	-291.03	-438.95
1R	0.00	-675.00
1S	532.50	-290.00
1T	515.00	-188.75
1U	515.00	-168.75

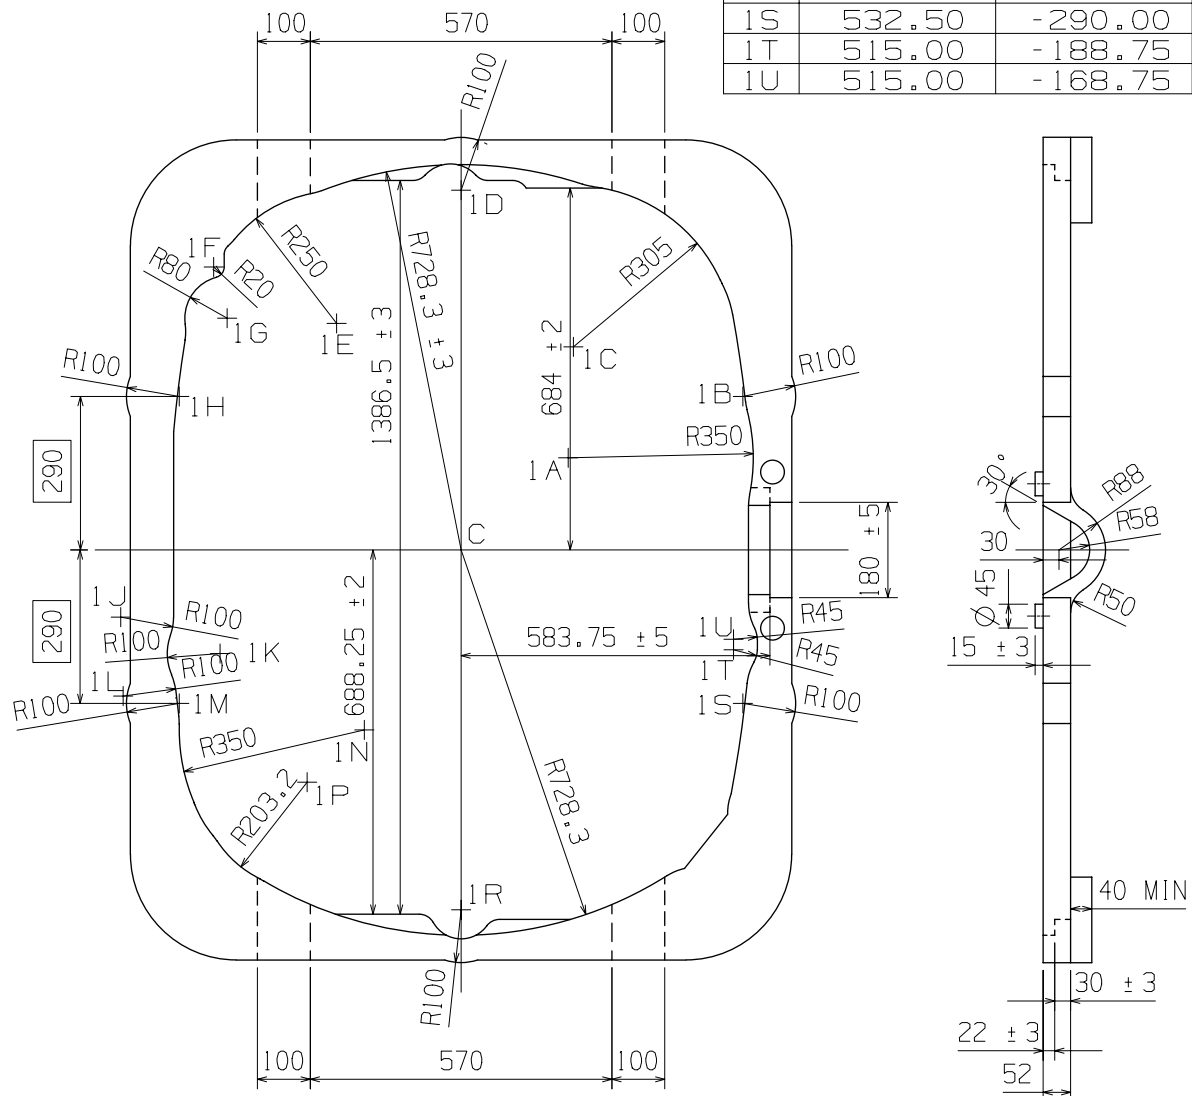



Scale : 7/1

Unit : 1=1/100

Version:2

Assembly Plan

Cal. VC01E

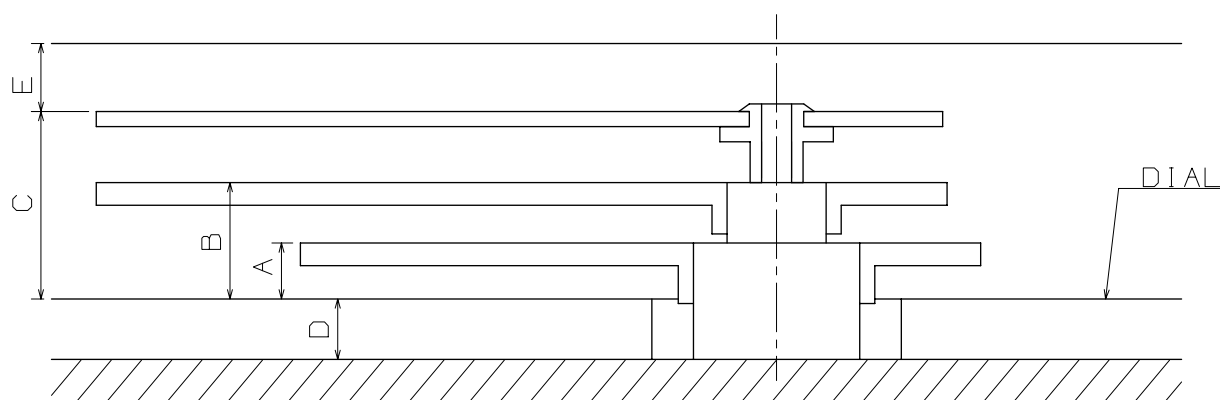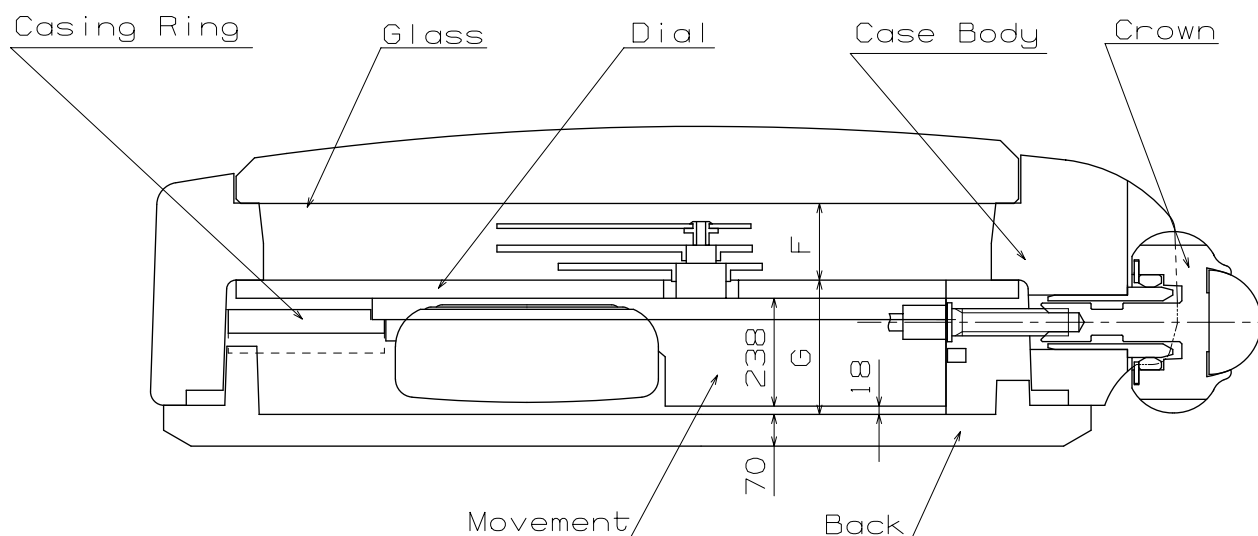

	A	B	C	D	E	F	G
TYPE M	37	77	124	40	45	169	296
TYPE L	35	78	122	72	45	167	328


Scale : -
Unit : 1=1/100

Version:4


Hands

Cal. VC01E


SECOND

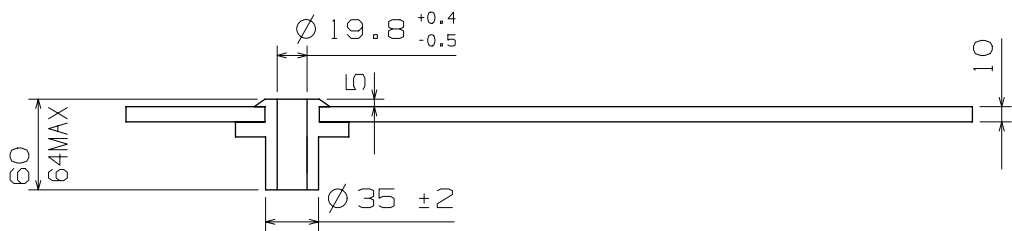

MINUTE

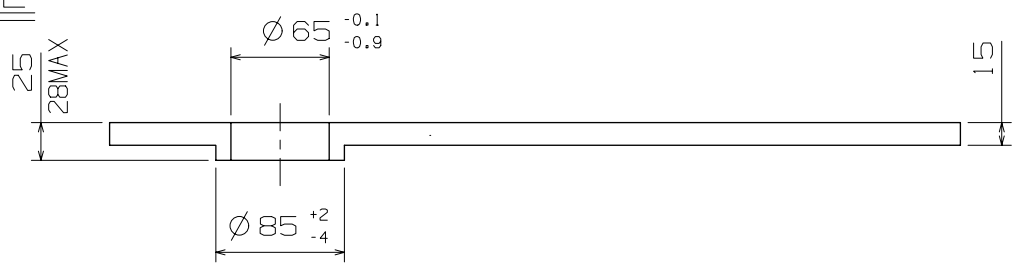

HOUR

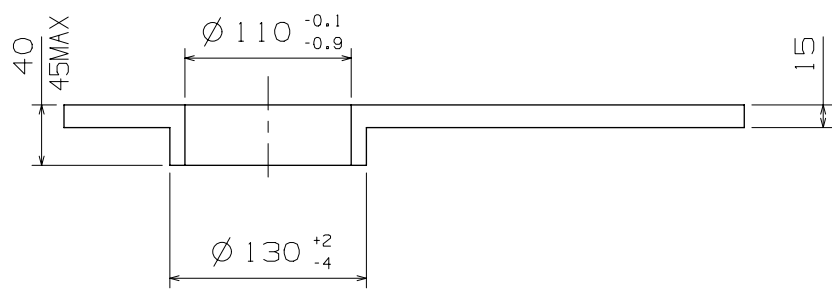

Scale : -
Unit : 1=1/100

Version:3