










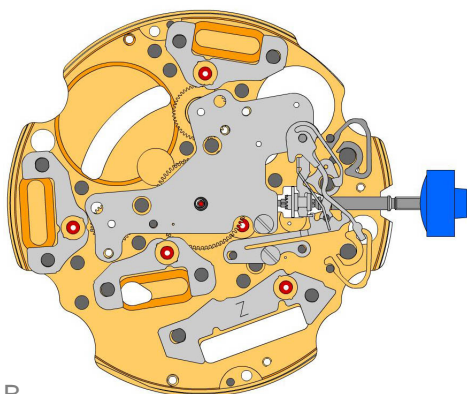










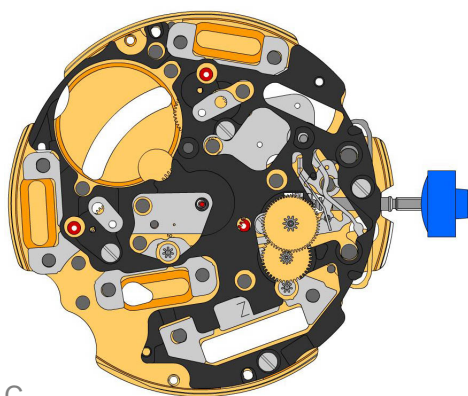
A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244.CO 3.		Hour wheel (counter 24h) (Chrono)
3301.243.CO 4.		Hour wheel (counter 12h) (Alarm)

2030.024.CO 5.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 6.		Screw
3001.055.FI 7.		Sliding pinion
3000.177.CO 8.		Setting stem
3017.049 9.		Setting lever
3905.049 10.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 11.		Screw
3015.081 12.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 13.		Yoke spring Tensioning the spring arm.
3406.030 14.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 15.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 16.		Stator Mark [Z] on stator.
3622.039 17.		Stator (counter 6h, 9h, chrono)
3622.039 18.		Stator (counter 6h, 9h, chrono)
3622.039 19.		Stator (counter 6h, 9h, chrono)




C

3603.079  
20.  Plastic bracket  
Plastic bracket held by 4 screws 4000.250.

4000.250  
21.  Screw

3715.094.RK  
22.  Rotor

3715.094.RK  
23.  Rotor

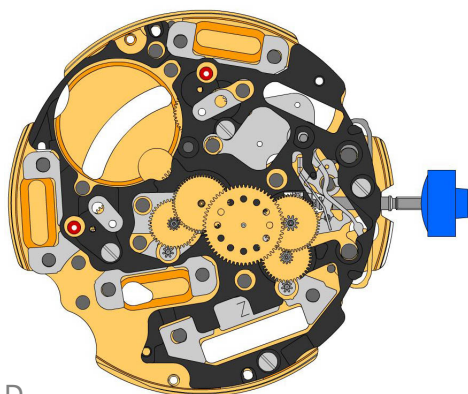


D


3147.046.CO  
24.  Intermediate wheel

3136.142.CO  
25.  Second wheel (long)


3147.047.CO  
26.  Intermediate wheel (chrono)

3136.144.CO  
27.  Chronograph wheel (Aig.2)

3122.056.CO  
28.  Third wheel

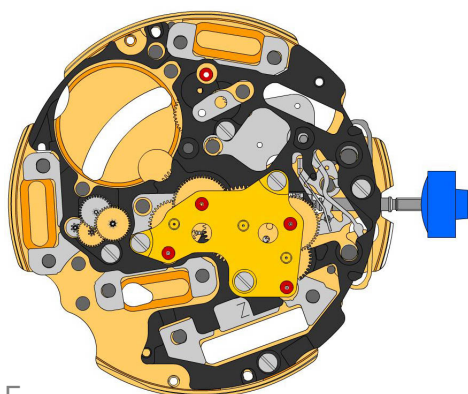


E

2020.148.G  
29.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.


4000.250  
30.  Screw

3715.095.RK  
31.  Rotor


3147.048.CO  
32.  Intermediate wheel (counter)

3007.056.CO  
33.  Minute wheel (counter 24h)

3402.008.CO  
34.  Minute counting wheel

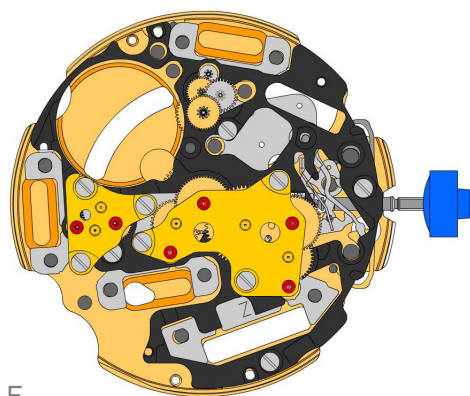

F


2020.149.G  
35.  Counter train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.


4000.250  
36.  Screw

3715.095.RK  
37.  Rotor


3147.048.CO  
38.  Intermediate wheel (counter)

3007.055.CO  
39.  Minute wheel (counter 12h)


3402.007.CO  
40.  Minute counting wheel

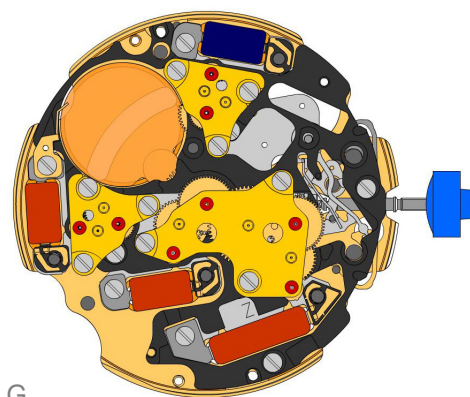



G


2020.149.G  
41.  Counter train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.

4000.250  
42.  Screw


3621.053.RK  
43.  Coil  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
44.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.


3621.054.RK  
45.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.055.RK  
46.  Coil (counter 6h)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.



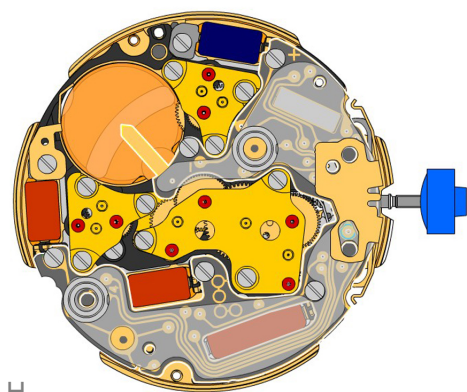



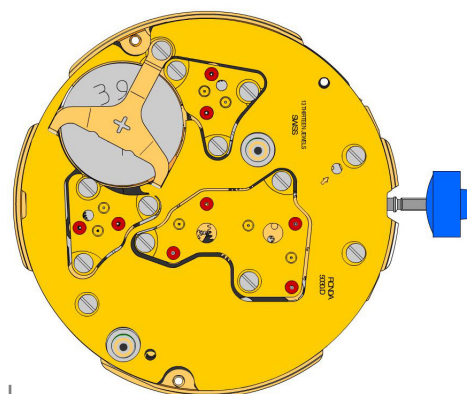






4000.250  
47.  Screw




H




I




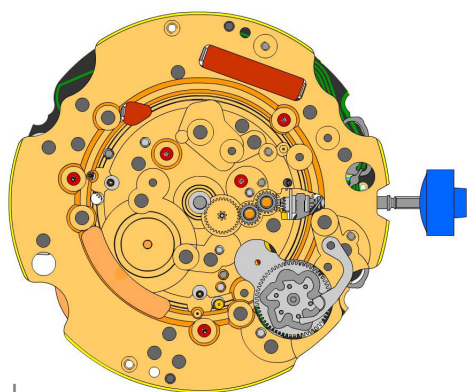



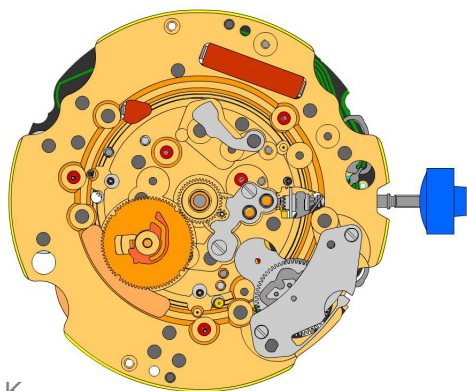






3601.118 48.		<b>Contact strip</b> Contact strip held by 1 screw 4000.250.
4000.250 49.		<b>Screw</b>
3603.034 50.		<b>Battery insulator</b>
3612.176.5130 51.		<b>Electronic module</b> Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 52.		<b>Screw</b>
3603.069 53.		<b>Circuit insulator</b>
3603.070 54.		<b>Contact insulator</b>
3603.070 55.		<b>Contact insulator</b>
3601.107.G 56.		<b>Pusher contact spring</b>
2130.159.G.M01.5130B 57.		<b>Electronic module cover</b> Electronic module cover held by 1 screw 4000.250.
3600.010.HGF 58.		<b>Battery 395</b>
3601.109.G 59.		<b>Bridle +</b> Bridle held by 1 screw 4000.250.
4000.250 60.		<b>Screw</b>




J



K

2000.574.G 61.		Main plate
3004.164 62.		Setting wheel
3004.164 63.		Setting wheel
3007.054.CO 64.		Minute wheel
2130.143 65.		Minute train bridge Minute train bridge held by 3 screws 4000.305.
4000.305 66.		Screw
3004.227 67.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 68.		Tens jumper
2130.142 69.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Place the spring loaded bracket outside of the tens jumper.
4010.306 70.		Screw
3301.242 71.		Hour wheel (Aig.1)
3315.016 72.		Friction spring
3004.224.CO 73.		Date indicator driving wheel
3500.049 74.		Date jumper



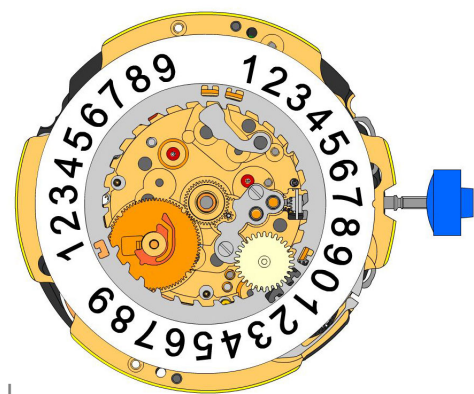

L

3504.214.AF.1.A  
75.



Units indicator (standard)  
Nick of the indicator at 3 o'clock.

3147.054  
76.



Tens intermediate wheel

2130.141  
77.



Date indicator maintaining plate  
Date indicator maintaining plate held by 1 screw 4000.250.

4000.250  
78.




Screw

3905.070  
79.



Date jumper spring  
Insert the date jumper spring in the provided opening.

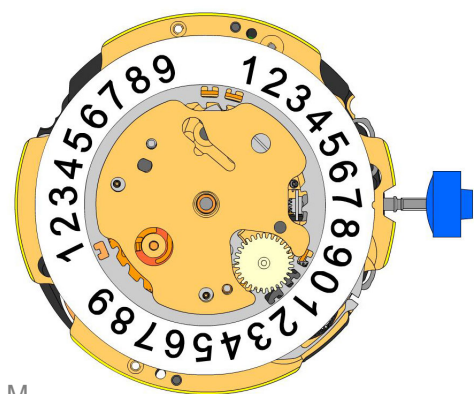

M

3504.216.AF.1.A  
80.



Tens indicator (standard)  
Insert the date jumper spring in the previous opening.

2130.140.G  
81.



Date mechanism maintaining plate  
Date mechanism maintaining plate held by 2 screws 4000.250.

4000.250  
82.




Screw

3506.072.G  
83.



Dial support

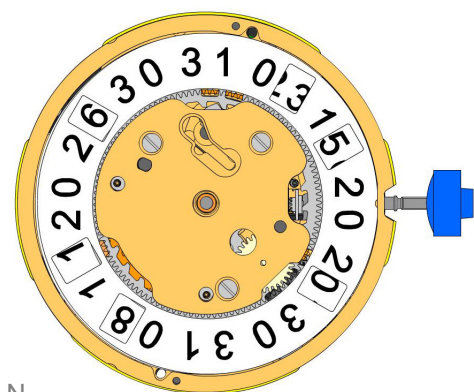

N

8200  
84.



Moebius 8200

9014  
85.



Moebius 9014

124  
86.




Jismaa 124


9020  
87.



Moebius 9020

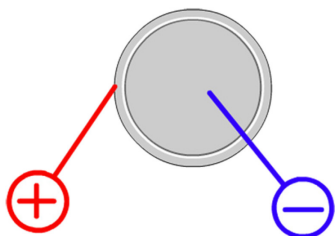


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

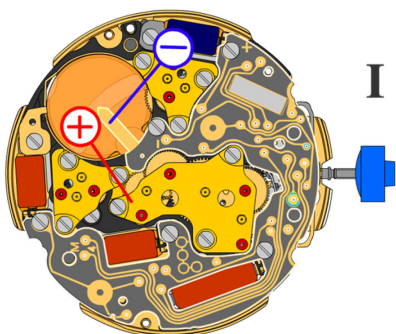


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.48 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Instantaneous rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.30 V</b>

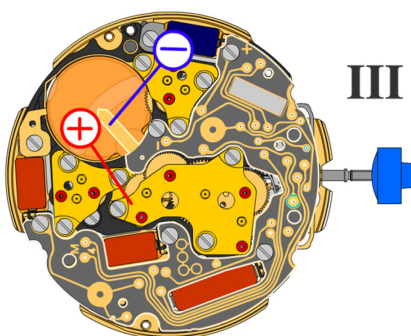

*Setting stem in position III, 60 s measuring interval:*

Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

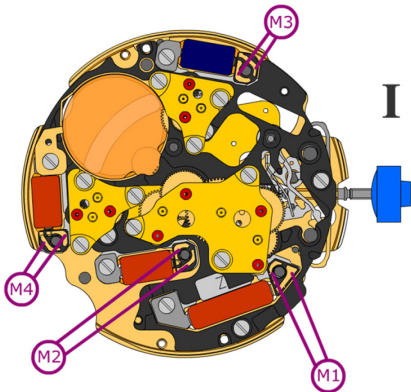


Coil resistance M1 **1.90 k $\Omega$  .. 2.10 k $\Omega$**


Coil resistance M2 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

Coil resistance M3 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

Coil resistance M4 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

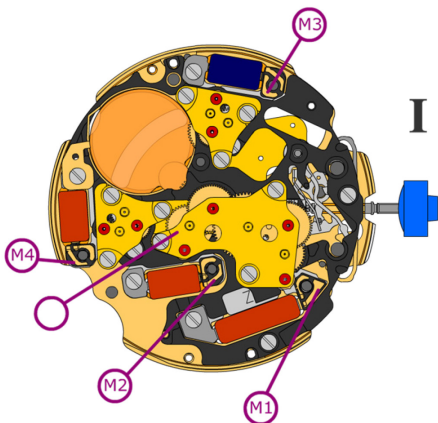

Coil isolation M1/M2/M3/M4  **$\infty$  k $\Omega$**

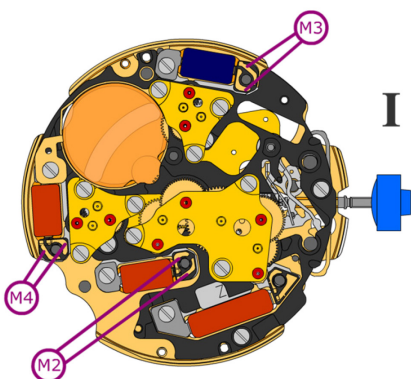

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit  
M2/M3/M4 **1.30 V**