



A

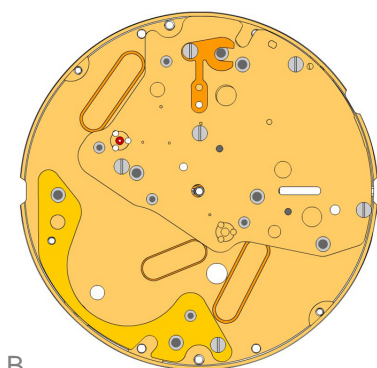

B

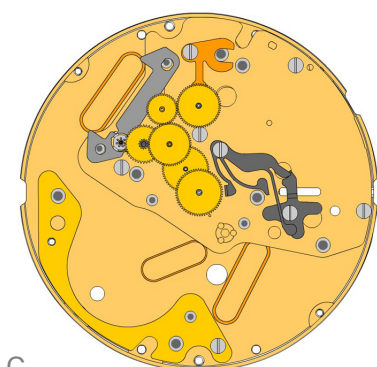

C

2000.669.G

1.



Main Plate

3305.363.CO

2.



Cannon pinion with driver B (Aig.1)

2030.028.CO

3.



Centre bridge

Centre bridge held by 3 screws 4000.250.

4000.250

4.



Screw

3406.039

5.



Sliding attachment

Sliding attachment held by 1 screw 4000.250.

2130.181.CO

6.



Combined maintaining plate

Combined maintaining plate held by 1 screw 4000.250.

4000.250

7.



Screw

3016.028

8.



Lever for setting lever

Lever for setting lever held by 1 screw 4000.249.

4000.249

9.



Screw

3016.027

10.



Stop lever

Stop lever Position held by 1 screw 4000.249.

4000.249

11.



Screw

3622.044

12.



Stator

3715.105.RK

13.



Rotor

3147.060.CO

14.



Intermediate wheel

3122.070.CO

15.



Third wheel

3136.174.CO

16.



Centre second wheel (Aig.1)

3004.203.CO

17.



Seconde intermediate wheel

3136.182.CO

18.




Small second wheel

3136.173.CO


19.




Centre second wheel (Aig.1)

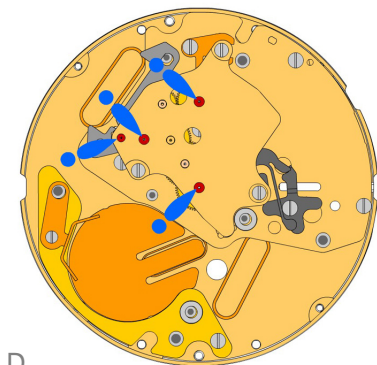

D

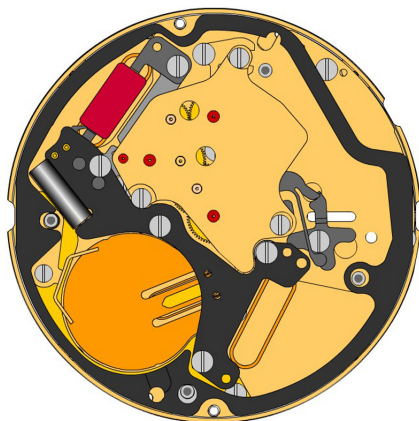

E

2020.170.G  
20.  **Train wheel bridge**  
Train wheel bridge held by 3 screws 4000.250.

4000.244  
21.  **Screws**

3603.080  
22.  **Battery insulator**

3601.120.G  
23.  **Battery clamp +**  
Battery clamp held by 1 screw 4000.248.

4000.248  
24.  **Screw**

3503.071  
25.  **Tube**

3612.196  
26.  **Electronic module**  
Electronic module held by 5 screws 4000.250.


4000.250  
27.  **Screw**

3603.081  
28.  **Spacer**


2130.183.G.M01.7004N  
29.  **Electronic module cover**  
Electronic module cover held by 4 screws 4000.244.

4000.244  
30.  **Screws**


3600.032.HGF  
31.  **Battery 381**

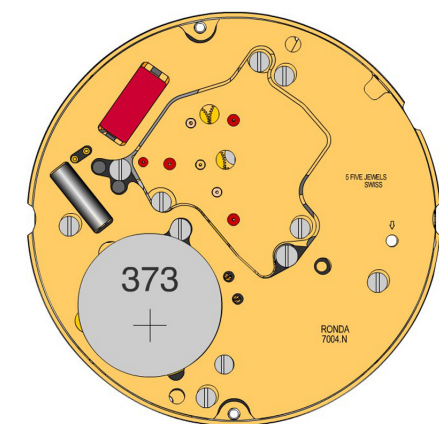

F

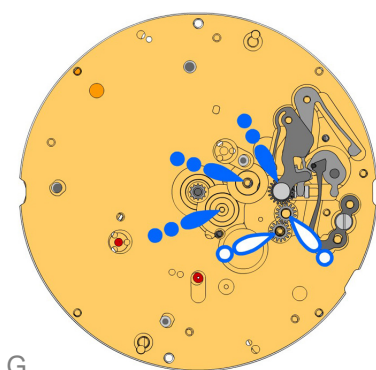

G

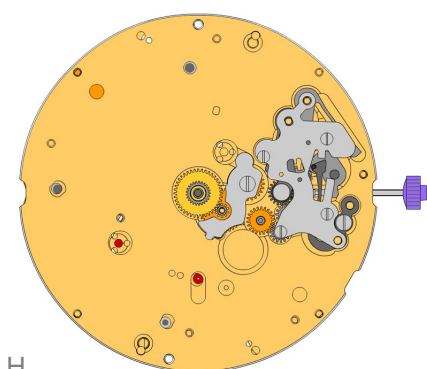

H

2000.669.G  
32.



Main Plate

3017.054.CO  
33.



Setting lever

3905.063  
34.



Setting lever jumper (3 positions)  
Setting lever jumper held by 1 screw 4000.282.

4000.282  
35.



Screw

3001.061.FI  
36.



Sliding pinion

3015.077  
37.



Yoke (3 positions)  
Tensioning the spring arm.

3004.200  
38.



Corrector setting wheel

3004.200  
39.



Corrector setting wheel

3015.078.CO  
40.



Rocking bar (3 positions)  
Tensioning the spring arm.

2130.194  
41.



Setting mechanism cover  
Setting mechanism cover held by 4 screws 4000.305.

4000.305  
42.



Screws

3000.194.CO  
43.



Stem

3004.204  
44.



Intermediate setting wheel

3007.079.CO  
45.



Minute wheel

2130.185  
46.



Minute train bridge  
Minute train bridge held by 1 screw 4000.278.

4000.278  
47.



Screw

3301.296.CO  
48.





Hour wheel (Aig.1)

3147.066.CO  
49.



Date corrector setting wheel

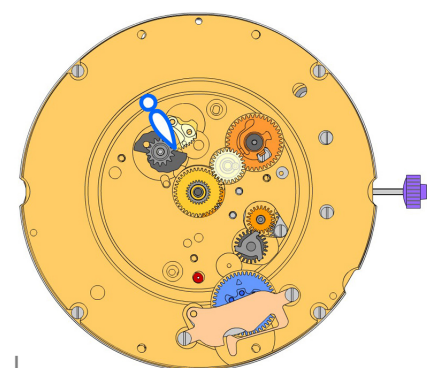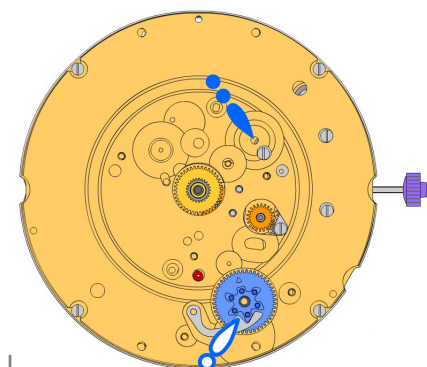

2000.672.G  
50.



**Main plate retro**  
Main plate retro held by 4 screws 4000.248.

4000.248  
51.



**Screw**

3004.209  
52.



**Tens indicator driving wheel**  
The short tooth of the tens indicator driving wheel must point to the center of the movement. Parts 3004.209 and 3500.073 must be exchanged together.

3500.073  
53.



**Tens jumper**  
Parts 3004.209 and 3500.073 must be exchanged together.

2130.187  
54.



**Tens jumper maintaining plate**  
Tens jumper maintaining plate held by 2 screws 4000.279. Tensioning the spring arm.

4000.279  
55.



**Screw**

3004.208.CO  
56.



**Date indicator driving wheel**

3147.061  
57.



**Intermediate date wheel**

3404.006.CO  
58.



**Day cam (12h)**  
Place parts as shown on graphics.

3406.032  
59.



**Day rack**

3406.031  
60.



**Day rack lever**

3507.059.CO  
61.



**Date corrector wheel**

2130.191  
62.



**Date indicator plate**

3905.068  
63.



**Date corrector spring**  
Date corrector spring held by 1 screw 4000.244.

3905.066  
64.



**Day rack lever spring**  
Tensioning the spring arm.

3500.069  
65.



**Day jumper**  
Tensioning the spring arm.

3500.068  
66.




**Date jumper**


3504.234.AD.1.A  
67.




**Units indicator (standard)**  
Nick of the indicator at 3 o'clock.

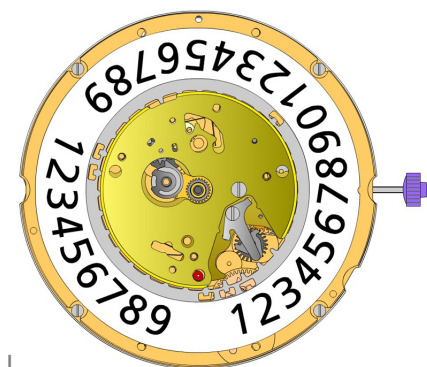



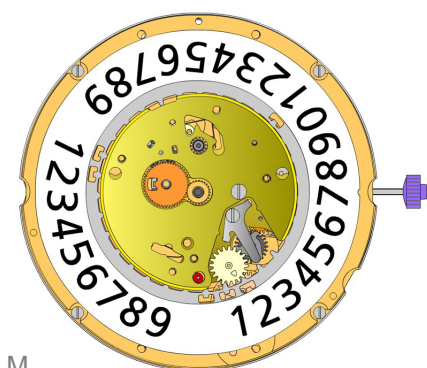


L

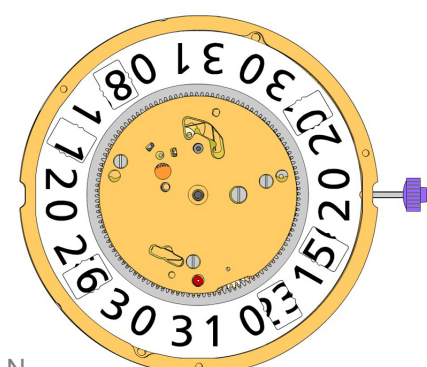










M







N


2130.192 68.		<b>Date indicator maintaining plate</b> Date indicator maintaining plate held by 1 screw 4000.250.
4000.250 69.		<b>Screw</b>
3905.064 70.		<b>Date jumper spring</b> Insert the date jumper spring in the provided opening.
3907.047 71.		<b>Day finger flange</b> Stem pos III: Turn crown forwards until the date jumps. Stem pos II: Move the date until the nick is at 3 o'clock.
3004.211 72.		<b>Day finger</b> Position the end of the teeth against the day came pinion while turning softly in counterclockwise direction.

3004.212 73.		<b>Days driving wheel</b> Insert the tooth of the wheel in the flange gap, while turning softly in counterclockwise direction to ensure correct position of the day finger.
3401.082.FI 74.		<b>Day indicator pinion</b>
3147.062 75.		<b>Tens intermediate wheel</b> Place the arrow of the tens intermediate wheel in front of the half tooth of the tens indicator driving wheel.
3315.003 76.		<b>Friction spring</b>
3504.231.AD.1.A 77.		<b>Tens indicator (standard)</b> Nick of the indicator at 3 o'clock.


2130.193.G 78.		<b>Date mechanism maintaining plate (12h)</b> Date mechanism maintaining plate held by 3 screws 4000.320.
4000.320 79.		<b>Screw</b>
3506.077.G 80.		<b>Intermediate dial support</b> Polished version first.
3506.076.G 81.		<b>Dial support</b>

8200 82.		<b>Moebius 8200</b>
9014 83.		<b>Moebius 9014</b>
124 84.		<b>Jismaa 124</b>
9020 85.		<b>Moebius 9020</b>



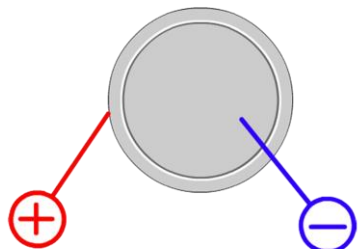


Battery	<b>381</b>
Voltage	<b>1.55 V</b>

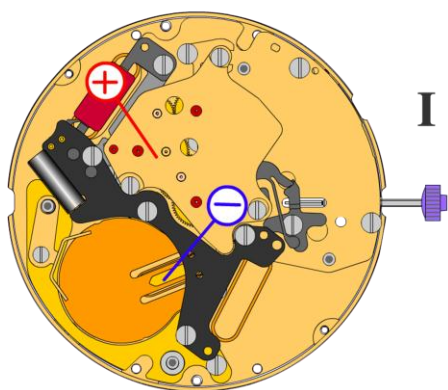

*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.43 <math>\mu</math>A</b>
Maximal consumption	<b>3.10 <math>\mu</math>A</b>
Instantaneous rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.30 V</b>

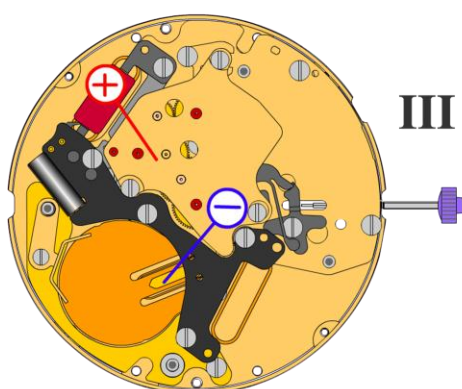

*Setting stem in position III, 60 s measuring interval:*

Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>