



3603.079 17.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
4000.250 18. T		Screw
3715.094.RK 19. <b></b>	<b>®</b>	Rotor
3715.094.RK 20.	*	Rotor
3147.046.CO 21. +	•	Intermediate wheel
3136.142.CO 22.	•	Second wheel (long)

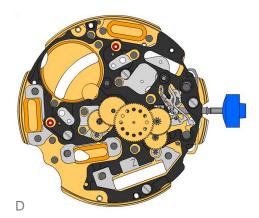


3147.047.CO 23. +	Intermediate wheel (chrono)
3136.143.CO 24. +	Chronograph wheel (Aig.1)
3122.056.CO 25. 🕇	Third wheel

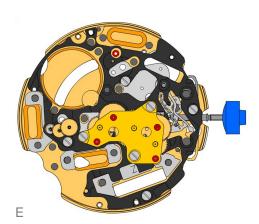


2020.148.G 26.	Train wheel bridge Train wheel bridge held by 3 screws 4000.250.
4000.250 27. T	Screw
3715.095.RK 28.	Rotor
3147.059.CO 29.	Intermediate wheel (counter)
3402.006.CO 30.	Minute counting wheel




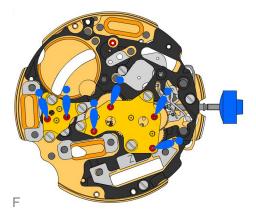



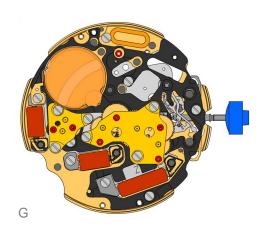



4000.250 33.		Screw
3621.053.RK 34.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 35.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 36.	6	Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
4000.250 37. T		Screw
3601.118 38.	6	Contact strip Contact strip held by 1 screw 4000.250.
4000.250 39. T		Screw
3603.034 40.		Battery insulator

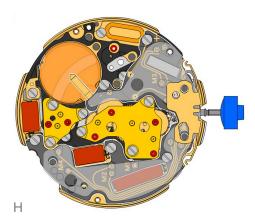


4000.248 41. T	Screw
3603.069 42.	Circuit insulator
3601.107.G 43.	Pusher contact spring




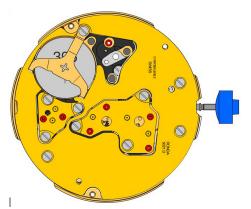


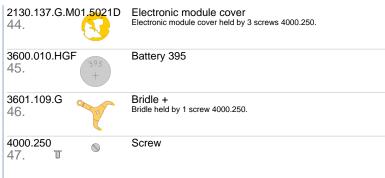






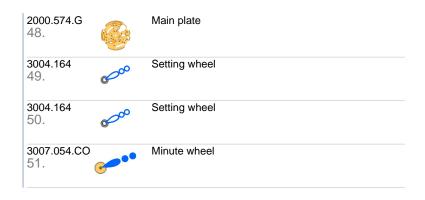




2130.143 52.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 53.	<b>\oint </b>	Screw
3301.241 54.	<b>*</b>	Hour wheel (Aig.1)
3315.016 55.	0	Friction spring
3004.224.CO 56.		Date indicator driving wheel
3500.049 57.		Date jumper



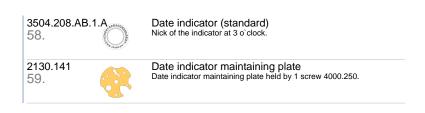






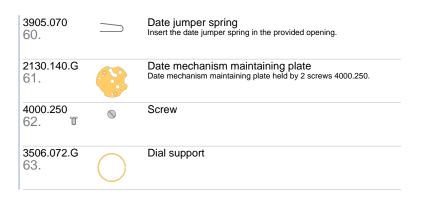

8200 64.	8	Moebius 8200
9014 65.	i	Moebius 9014
124 66.	80	Jismaa 124
9020 67.	i	Moebius 9020




#### 5021.D



395 **Battery** 

Voltage 1.55 V




Setting stem in position I, calendar not in gear, 60 s measuring interval for rate and consumption:

Typical consumption 1.32 μΑ Maximal consumption 1.65 µA

-10s/M. .. +20s/M. Instantaneous rate

Lower working voltage limit 1.30 V




Setting stem in position III, 60 s measuring interval:

Typical consumption 0.10 μΑ Maximal consumption 0.30 μΑ




#### 5021.D



1.90 k $\Omega$  .. 2.10 k $\Omega$ Coil resistance M1


Coil resistance M2 2.20 k $\Omega$  .. 2.40 k $\Omega$ 

Coil resistance M4 2.20 k $\Omega$  .. 2.40 k $\Omega$ 

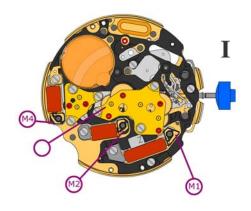

Coil resistances M1-M4

 $\infty k\Omega$ 



Signal generator (4.9 ms, 8 Hz):

Lower working voltage limits M2-M4

1.30 V