




3603.079 17.		Plastic bracket Plastic bracket held by 4 screws 4000.250.
4000.250 18. T		Screw
3715.094.RK 19	*	Rotor
3715.094.RK 20.	*	Rotor
3147.046.CO 21. +	•	Intermediate wheel
3136.142.CO 22.	•	Second wheel (long)

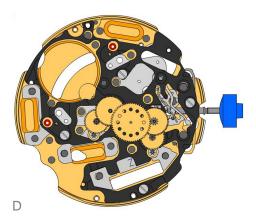


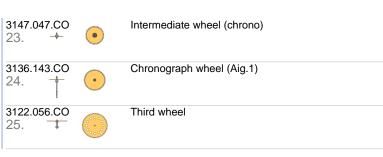

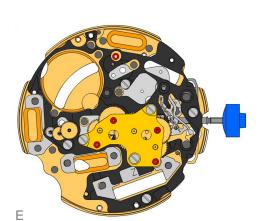


2020.148.G 26.	Train wheel bridge Train wheel bridge held by 3 screws 4000.250.
4000.250 27. T	Screw
3715.095.RK 28.	Rotor Parts 3612.144.5021, 3715.095.RK and 3147.048.CO must be exchanged together.
3147.048.CO 29. +	Intermediate wheel (counter) Parts 3612.144.5021, 3715.095.RK and 3147.048.CO must be exchanged together.
3402.006.CO 30.	Minute counting wheel




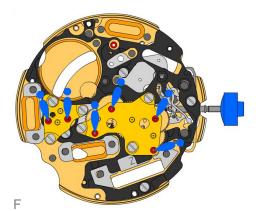



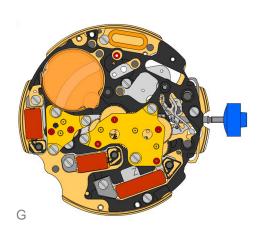


4000.250 33. T		Screw
3621.053.RK 34.	P	Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 35.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 36.	6	Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
4000.250 37. T	\(\infty\)	Screw
3601.118 38.	6	Contact strip Contact strip held by 1 screw 4000.250.
4000.250 39. T	\(\infty\)	Screw
3603.034 40.		Battery insulator

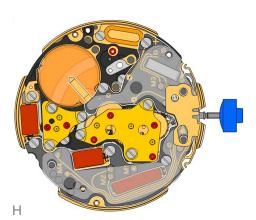


3612.144.5021 41.	Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now. Parts 3612.144.5021, 3715.095.RK and 3147.048.CO must be exchanged together.
4000.248 42.	Screw
3603.069 43.	Circuit insulator
3601.107.G 44.	Pusher contact spring




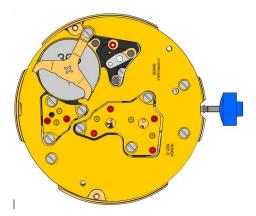










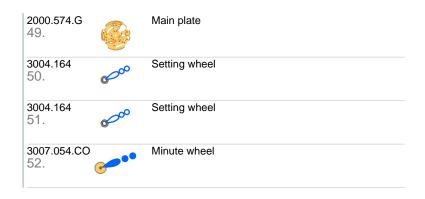



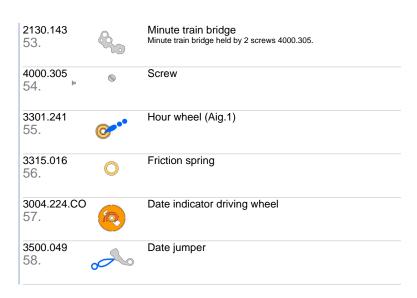




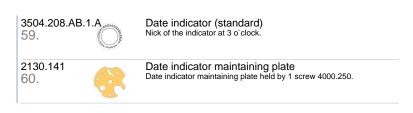






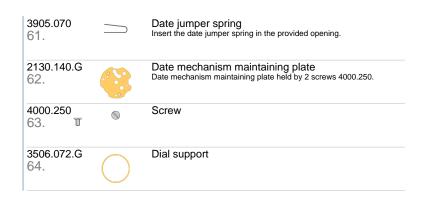

8200 65.	8	Moebius 8200
9014 66.	i	Moebius 9014
124 67.	8	Jismaa 124
9020 68.	i	Moebius 9020




5021.D



395 **Battery**

Voltage 1.55 V




Setting stem in position I, calendar not in gear, 60 s measuring interval for rate and consumption:

Typical consumption 1.32 μΑ Maximal consumption 1.65 µA

-10s/M. .. +20s/M. Instantaneous rate

Lower working voltage limit 1.30 V



Setting stem in position III, 60 s measuring interval:

Typical consumption 0.10 μΑ Maximal consumption 0.30 μΑ




5021.D



1.90 k Ω .. 2.10 k Ω Coil resistance M1


Coil resistance M2 2.20 k Ω .. 2.40 k Ω

Coil resistance M4 2.20 k Ω .. 2.40 k Ω

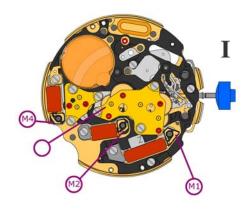

Coil resistances M1-M4

 $\infty k\Omega$



Signal generator (4.9 ms, 8 Hz):

Lower working voltage limits M2-M4

1.30 V