

Cal. VD78A

ϕ 23.70 mm

H 3.45 mm

Item	Version No.
Specification - 1	Version 4
Specification - 2	Version 1
Appearance	Version 6
Casing	Version 6
Hand Fitting	Version 4
Hand Setting Stem	Version 4
Dial	Version 2
Casing Ring	Version 1
Assembly Plan	Version 6
Hands	Version 2



MOVEMENT SPECIFICATION - 1

CAL.VD78A 10 1/2 Ligne Quartz Movement Two Hands with 1 Eye (Small second indicators)

1. MOVEMENT DIMENSIONS

• Outside diameter	ϕ 23.70	22.60mm (12H~6H) x 22.60mm (3H~9H)
• Casing diameter	ϕ 23.30	22.10mm (12H~6H) x 21.40mm (3H~9H)
• Total height		3.45 mm

2. TIME STANDARD

• Type of quartz oscillator	Tuning fork
• Frequency of quartz oscillator	32,768 H Z
• Accuracy	Monthly rate: Less than 20 seconds per month at normal temperature range
• Regulation device	Nil
• Regulation hands unbalance	Minute : Less than 0.6 μ N·m (60mg·mm) Hour : Less than 0.6 μ N·m (60mg·mm)
• Small hands unbalance	Less than 0.05 μ N·m (5mg·mm) for small second hand

3. BATTERY

• Type	Silver oxide battery
• Size	ϕ 6.8 x t 2.6 (mm)
• Nominal voltage	1.55V
• Battery life	Approx. 3 years
• Recommended battery	SR626SW (SEIZAIKEN)

4. STEPPING MOTOR

• Type	Two pole stepping motor
• Step	180° every second

5. JEWEL

0 jewel

6. ANTIMAGNETISM

(direct current magnetic field)

≥ 1600 A / m

7. SHOCK RESISTANCE

On equal level with general quartz movement

8. OPERATING TEMPERATURE RANGE

From - 5°C to + 50°C

9. TEST OF ACCURACY

• Equipment to be used	SEIKO Quartz Tester QT - 99 Greiner Quartz Timer - C Watch Q-Tester 4000
• Duration of measurement	10 seconds
• Microphone to be used	Electromagnetic detection type

*** All specifications are subject to change without notice.**

Movement Specification - 2


CAL. VD78A

OPERATION

[normal position]

small second hand

hour hand

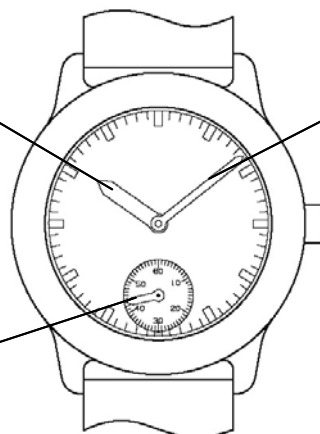

minute hand

no function (free)

[1st click]




**time setting,
second setting and
reset switch**

Version 1

Appearance

Cal. VD78A

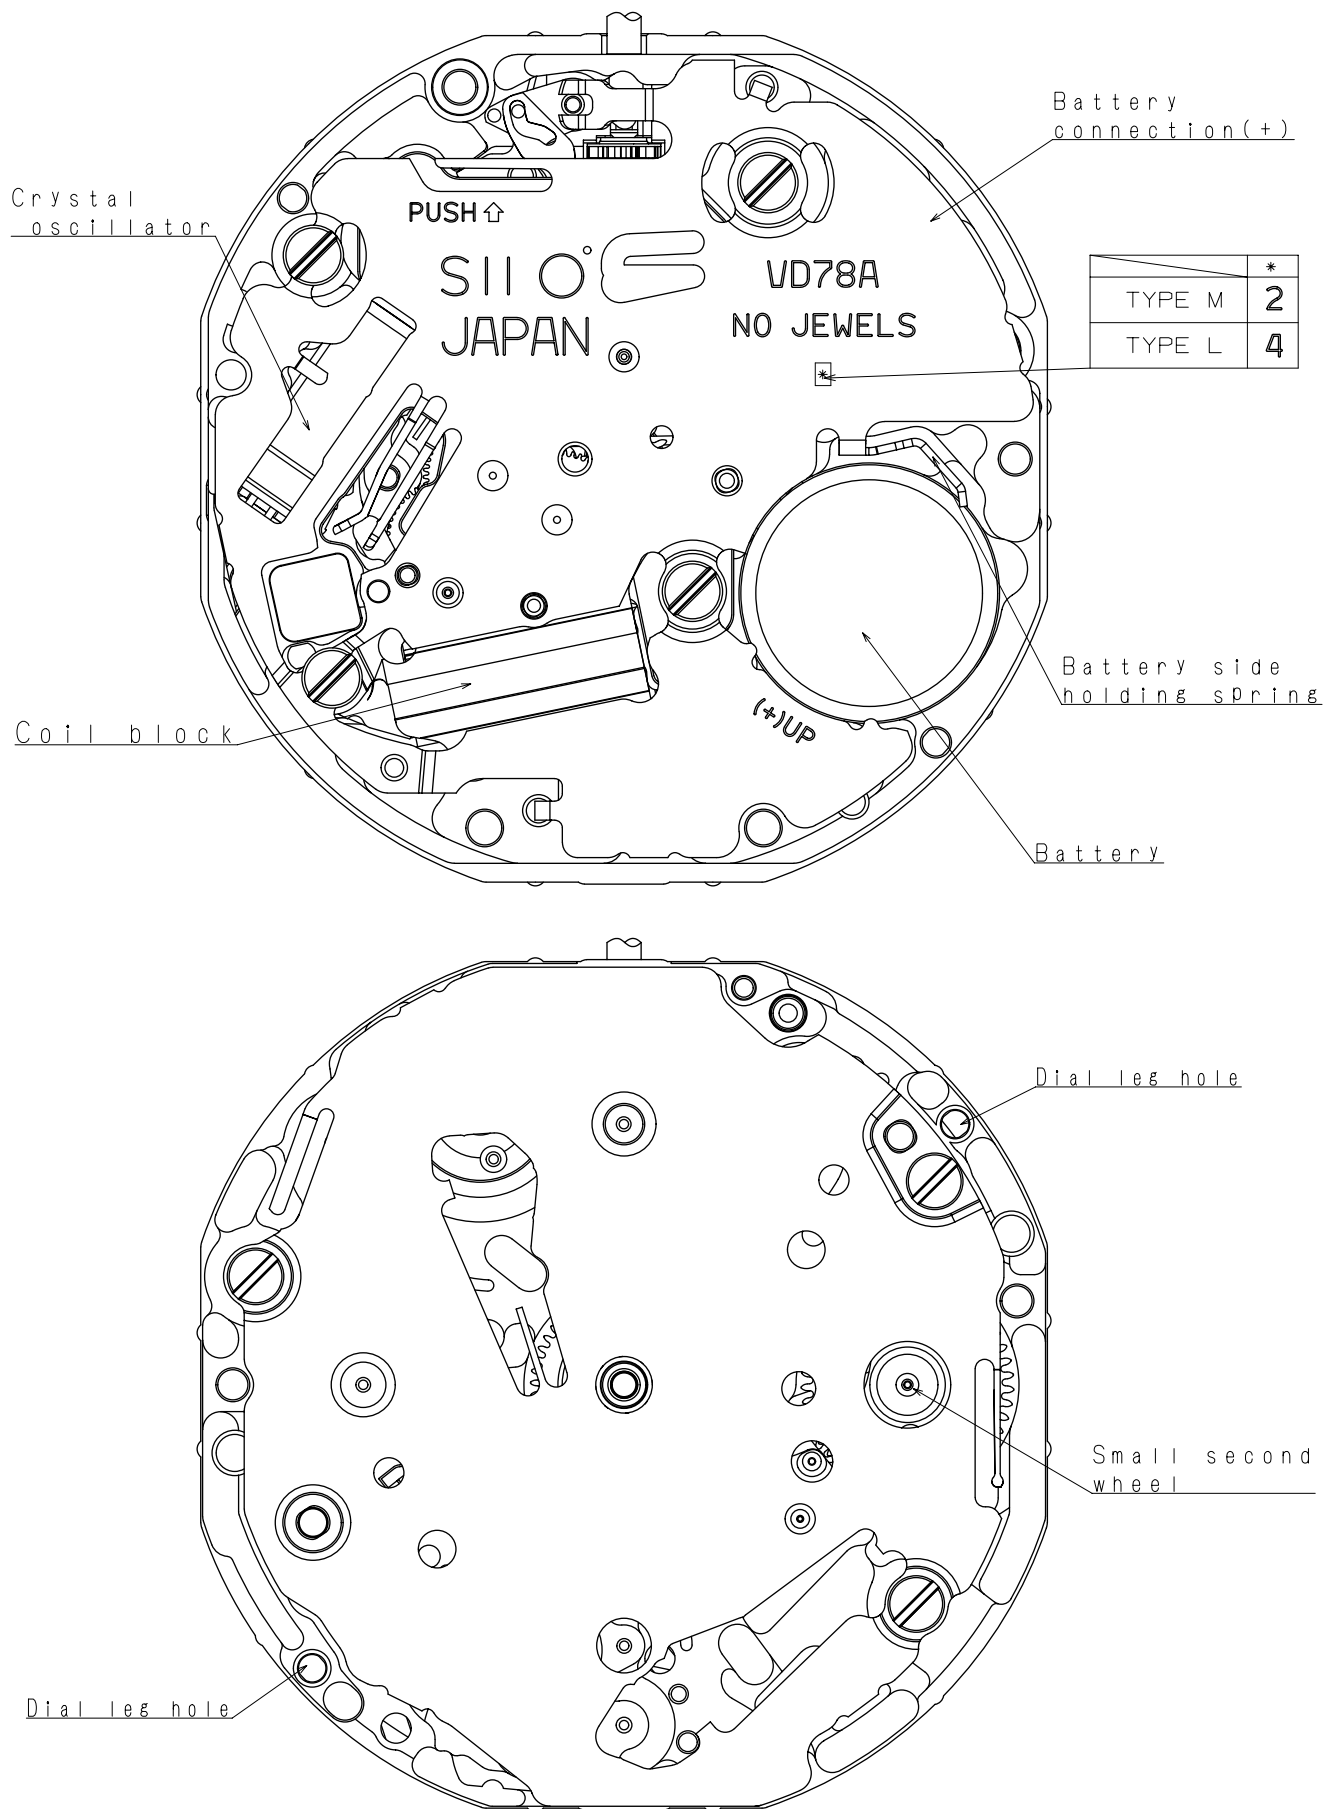


Scale : 5/1

Unit : 1=1/100mm


Version:6

* Pull out stroke 44.8

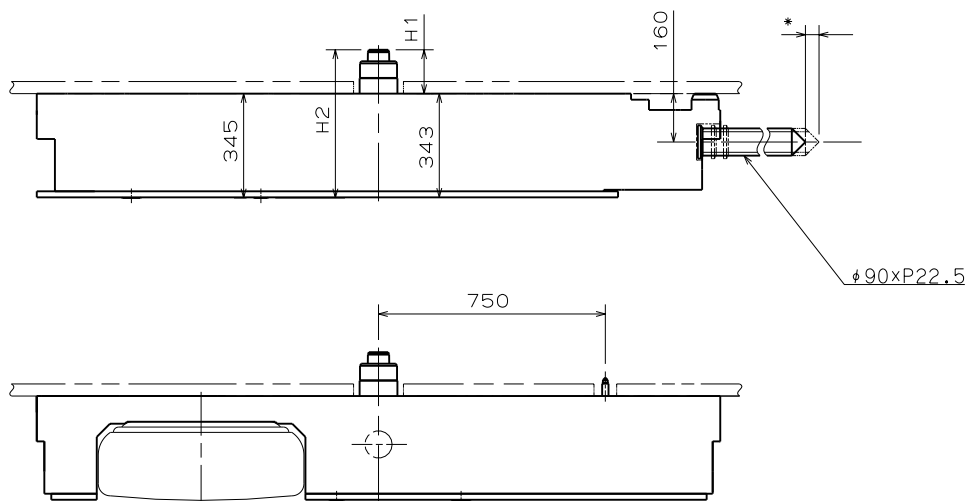

Center post		TYPE M	TYPE L
Maximum height from main plate surface	H1	150	230
Total height incl. movement	H2	495	575

Hand Setting Stem	TYPE A	TYPE B
L 1	2436	3012

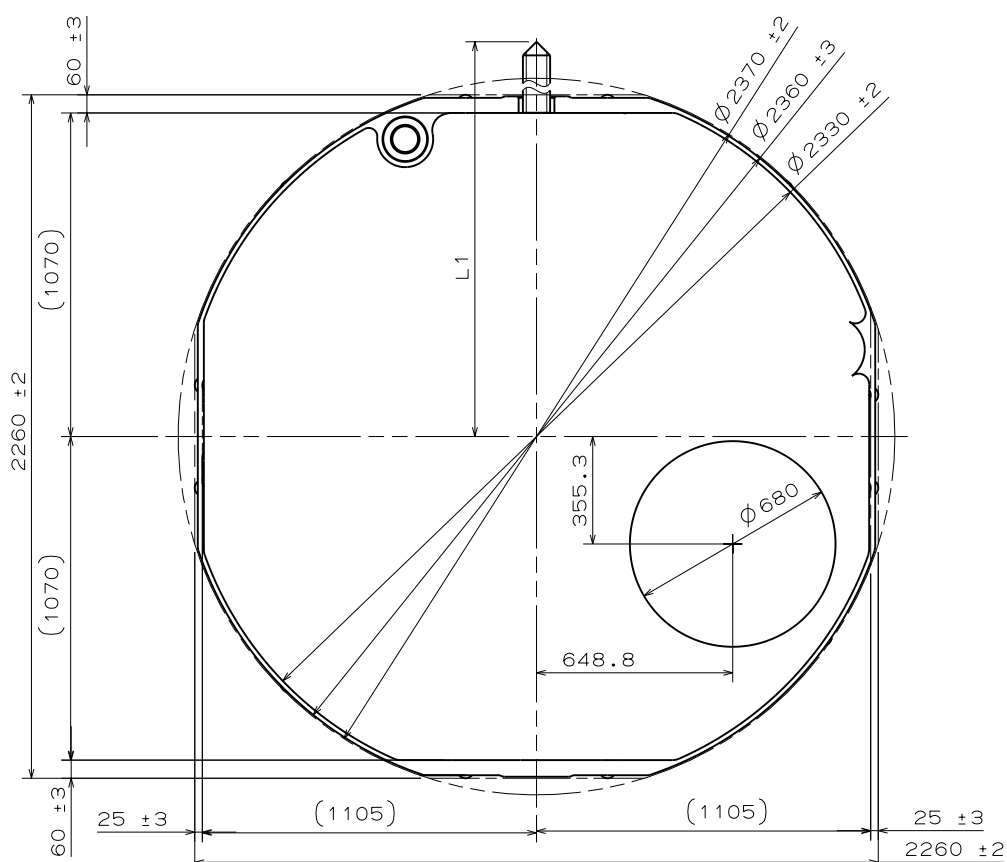


Scale : 4 / 1

Unit : 1 = 1/100mm


V e r s i o n : 6

* Pull out stroke 44.8

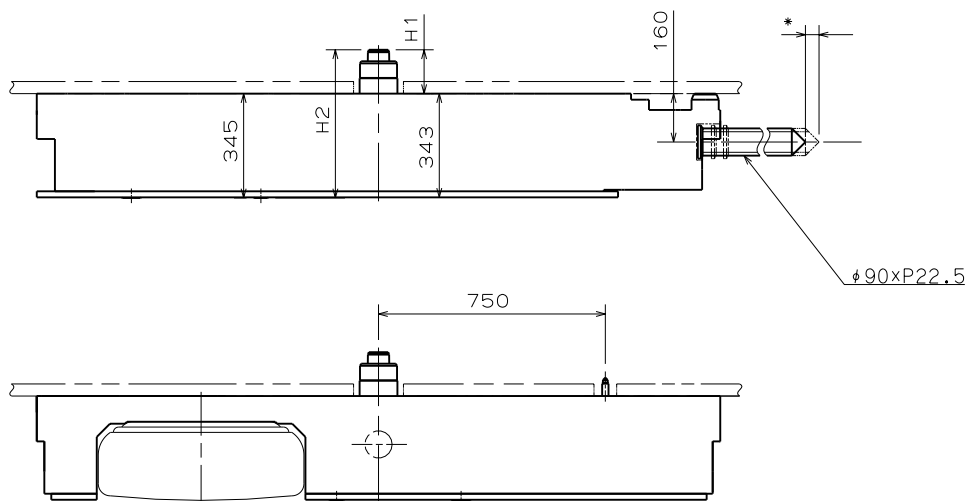

Center post 中心柱位		Type M 一般針高	Type L 高針
Maximum height from main plate surface 與機芯平面之最大高度	H1	150	230
Total height incl. movement 機芯總高度	H2	495	575

Hand Setting Stem	TYPE A	TYPE B
L1	2436	3012

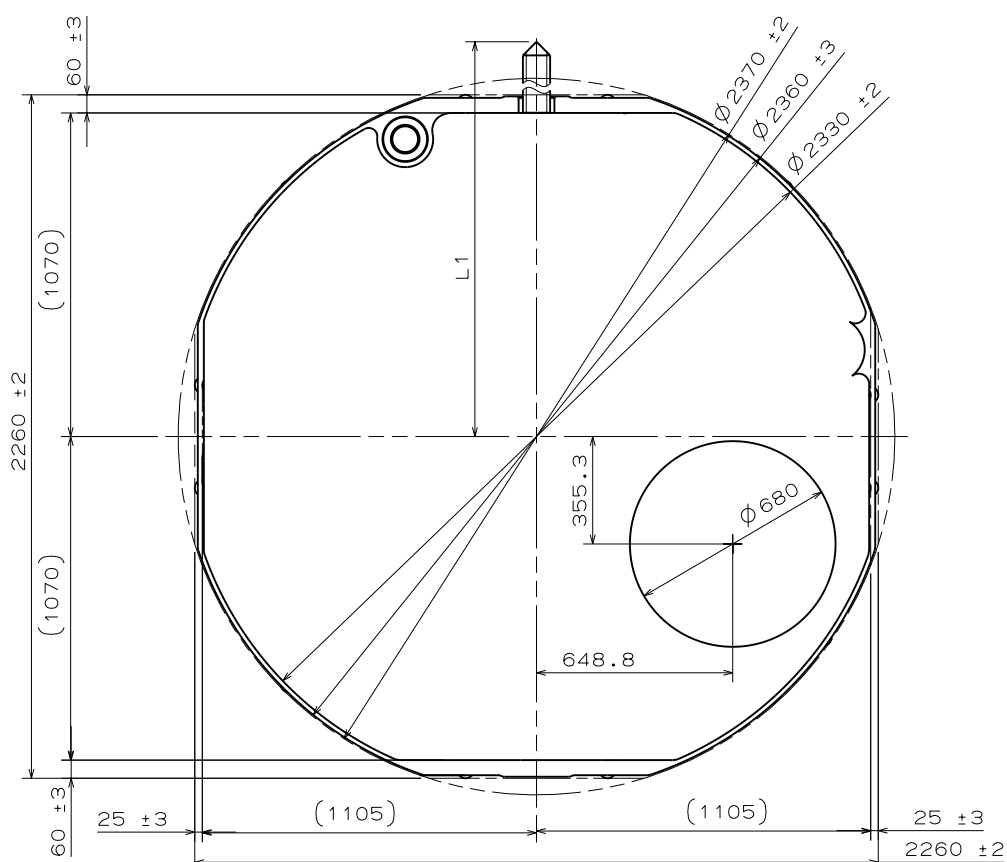

Scale : 4/1


Unit : 1=1/100mm

Version:6


Hand Fitting

Cal. VD78A

- *Hour hand unbalance $\leq 0.6 \mu\text{N} \cdot \text{m}$ (60mg·mm)
- *Minute hand unbalance $\leq 0.6 \mu\text{N} \cdot \text{m}$ (60mg·mm)
- *Small second hand unbalance $\leq 0.05 \mu\text{N} \cdot \text{m}$ (5mg·mm)

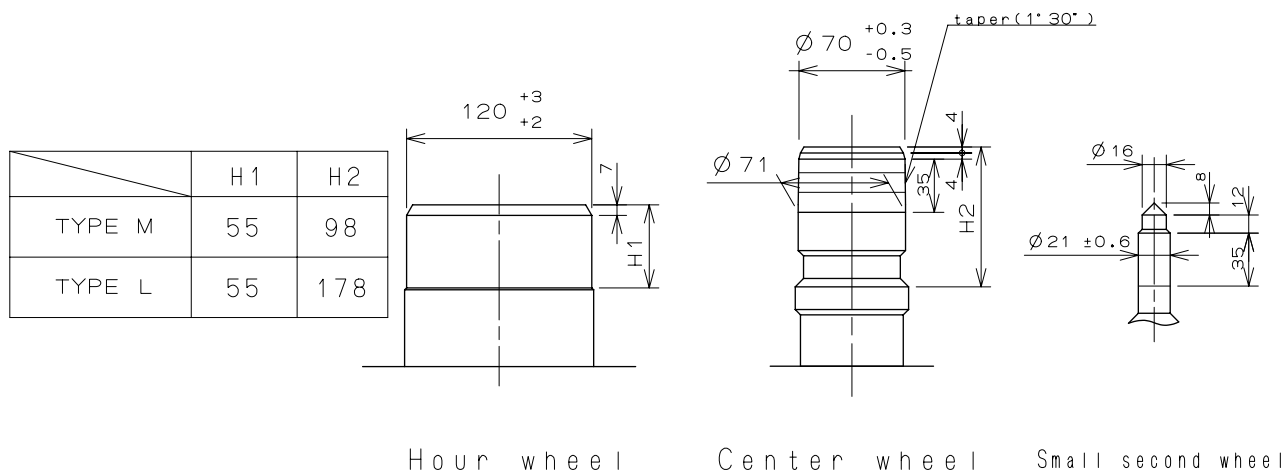

Part name	Part No.	
	TYPE M	TYPE L
Hour wheel	0273 1690	0273 0350
Center wheel	0221 0690	0221 0760
Small second wheel	0240 1690	0240 0150

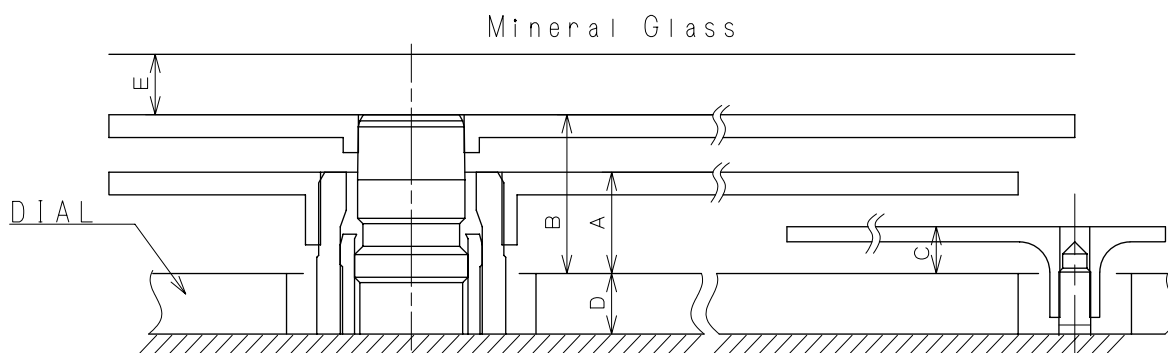

	A	B	C	D	E
TYPE M	72	110	31	40	35
TYPE L	95	145	41	85	40

Scale : 20/1


Unit : 1=1/100mm

Version:4


Hand Fitting

Cal. VD78A

- *Hour hand unbalance $\leq 0.6 \mu\text{N} \cdot \text{m}$ (60mg·mm)
- *Minute hand unbalance $\leq 0.6 \mu\text{N} \cdot \text{m}$ (60mg·mm)
- *Small second hand unbalance $\leq 0.05 \mu\text{N} \cdot \text{m}$ (5mg·mm)

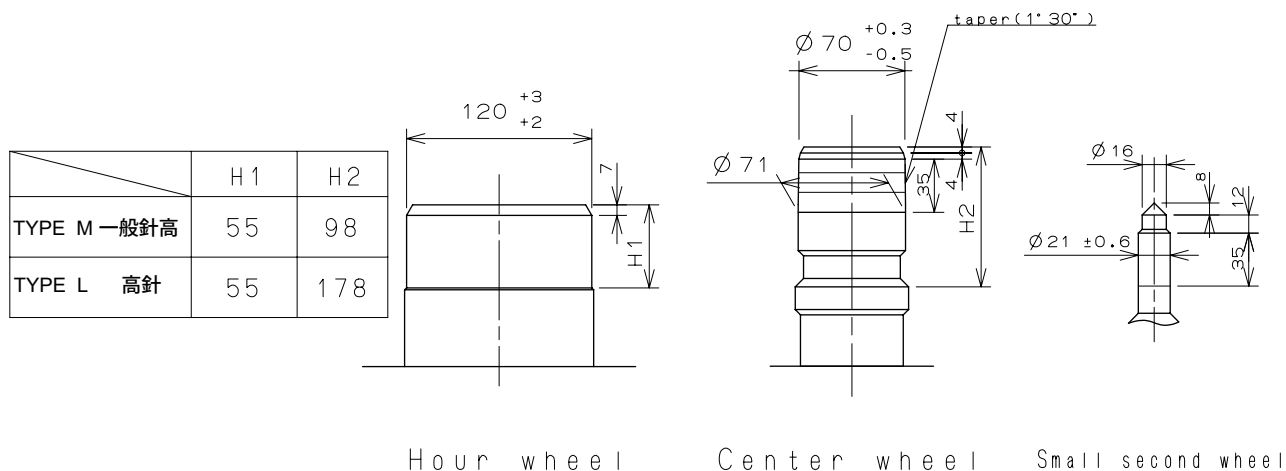

Part name	Part No.	
	TYPE M 一般針高	TYPE L 高針
Hour wheel 時針輪	0273 1690	0273 0350
Center wheel 分針輪	0221 0690	0221 0760
Small second wheel 小秒針輪	0240 1690	0240 0150

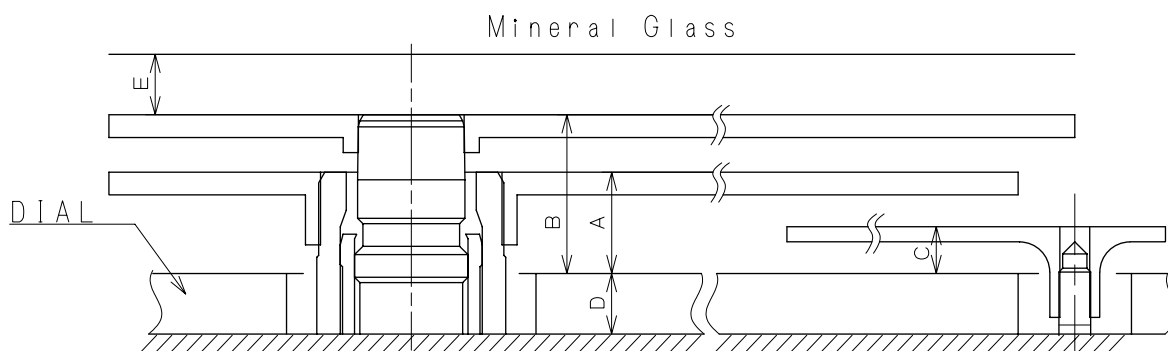


	A	B	C	D	E
TYPE M 一般針高	72	110	31	40	35
TYPE L 高針	95	145	41	85	40

Scale : 20/1

Unit : 1=1/100mm

Version:4


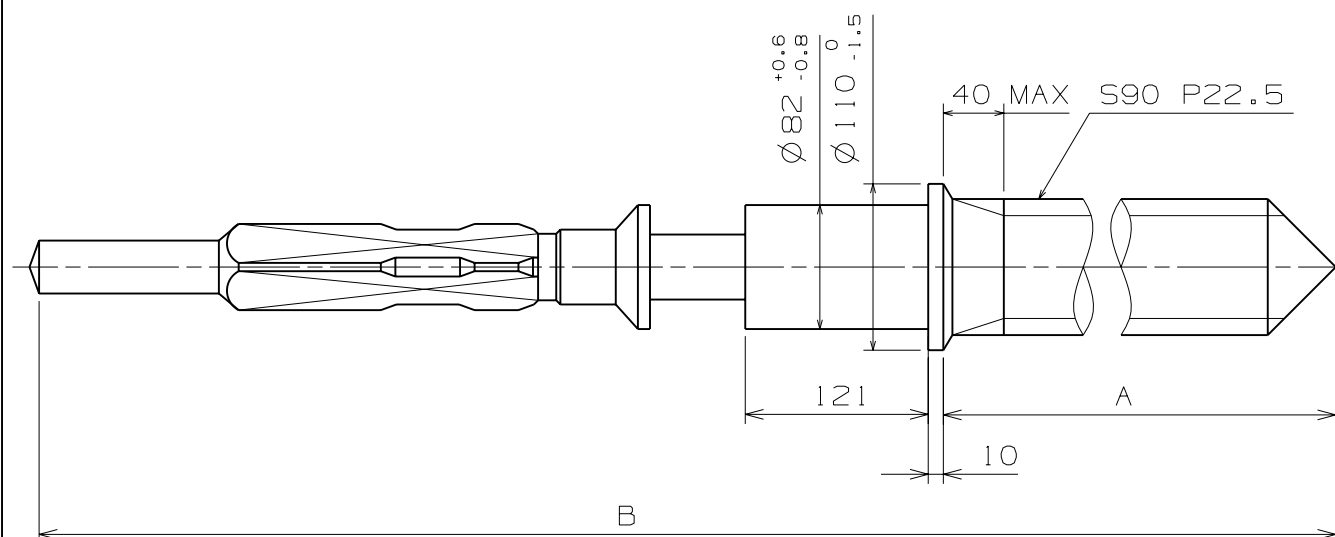


	Part. No.	A	B
TYPE A	0351 1770	1371	1969
TYPE B	0351 1220	1947	2545

Scale : 20/1

Unit : 1=1/100mm

Version:4

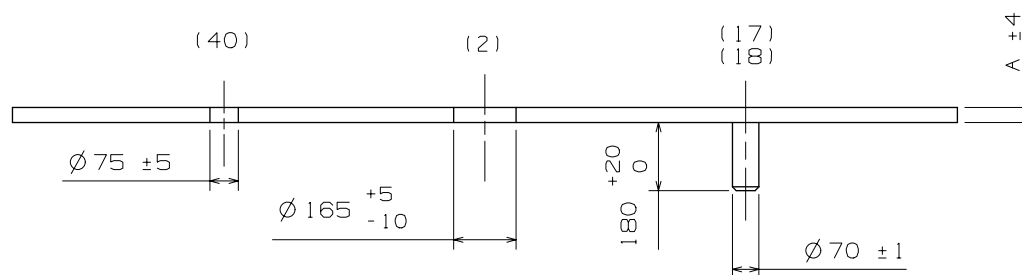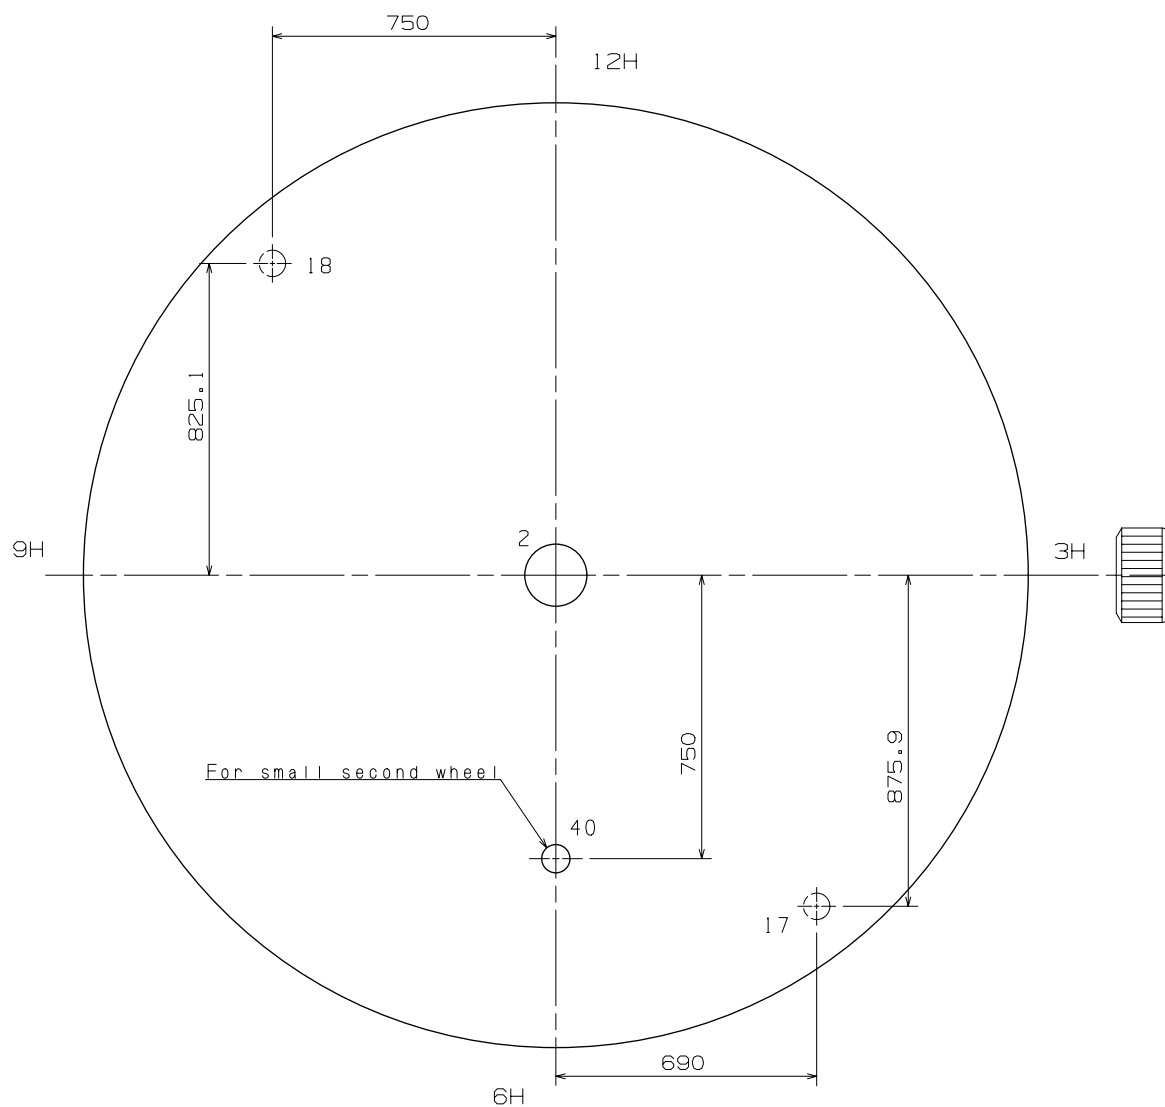


	TYPE M	TYPE L
A	40	85

Scale : 5/1
Unit : 1 = 1/100 mm

Version: 2

Casing Ring

Cal. VD78A

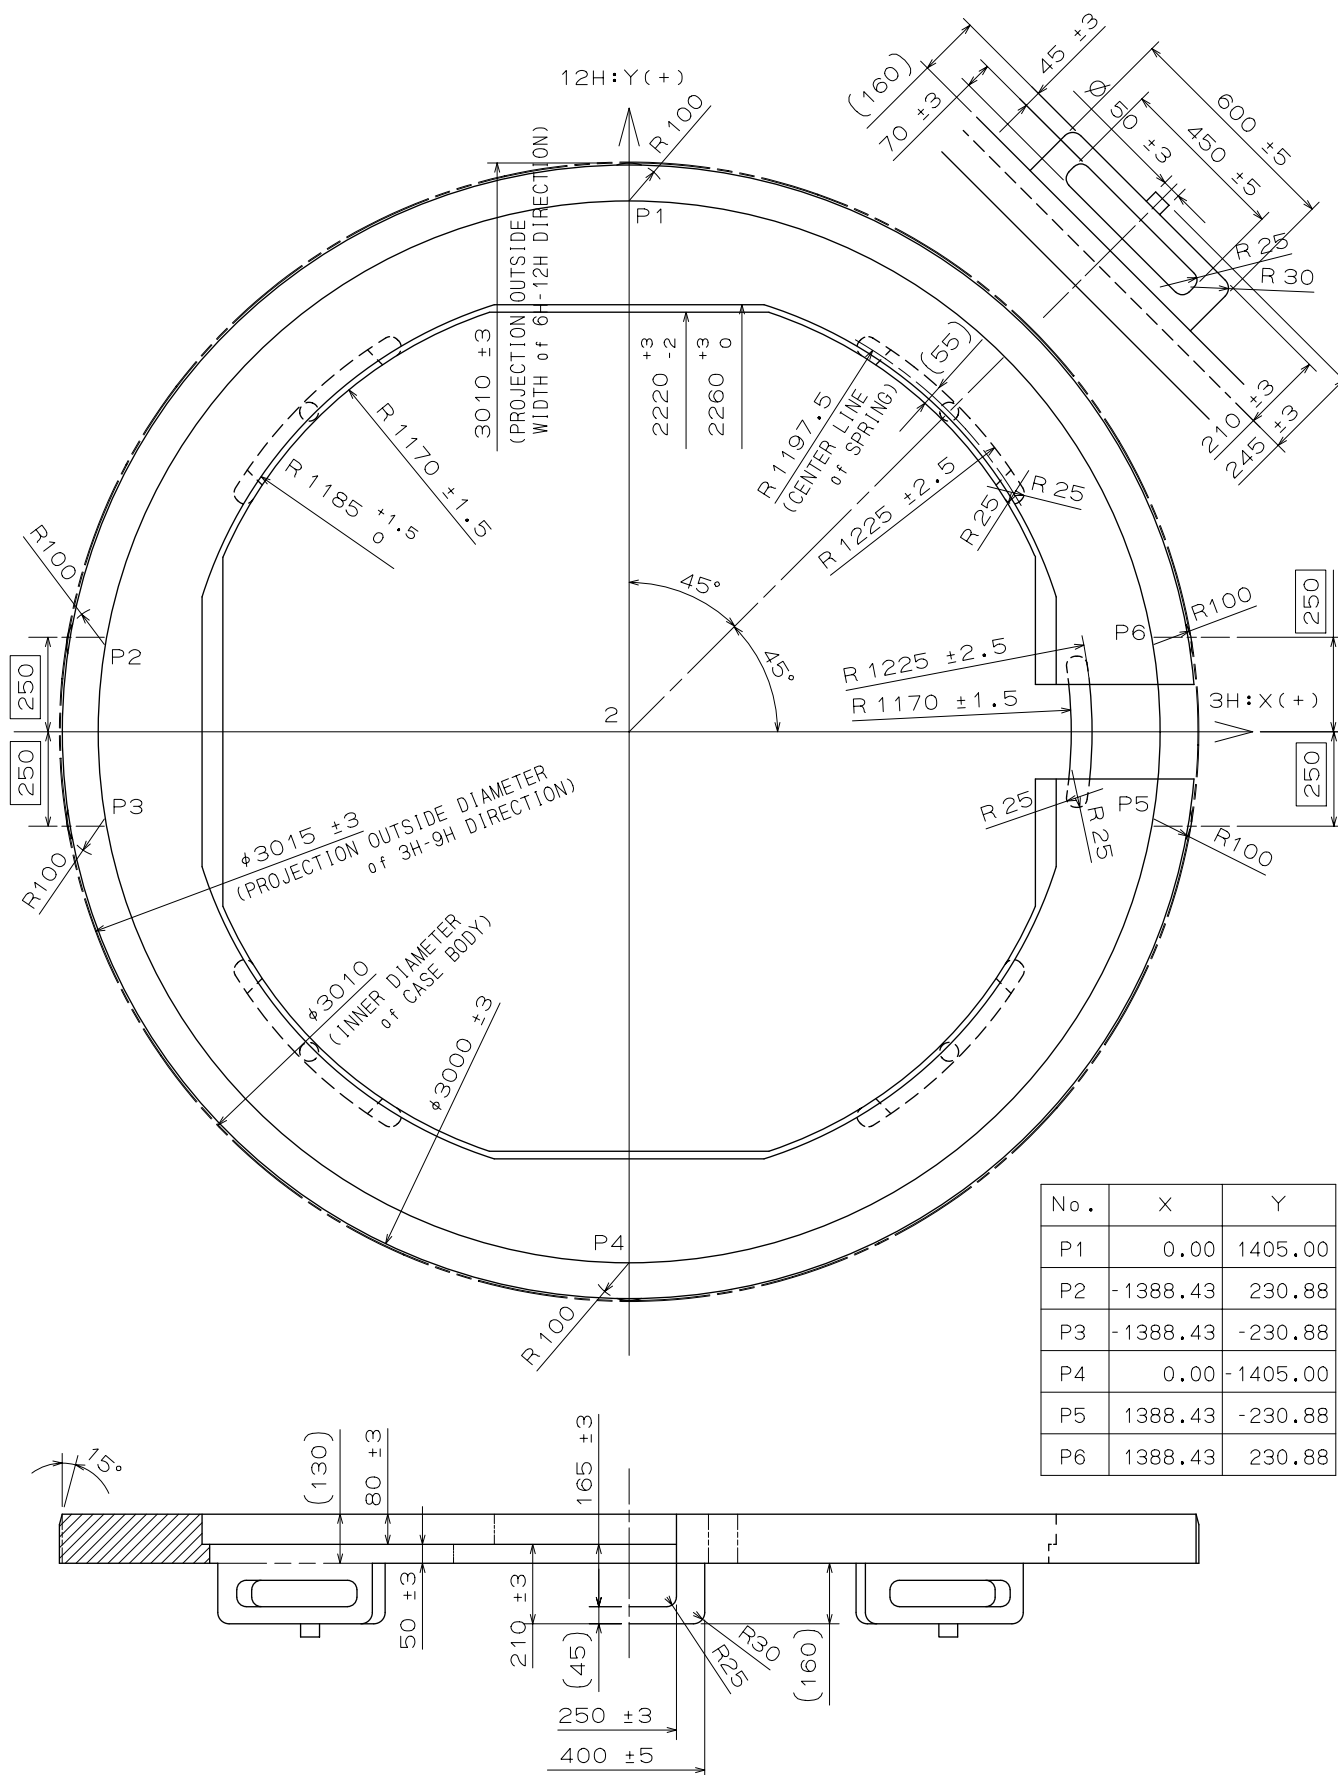

SECTIONAL VIEW of 6H(12H) DIRECTION


SIDE VIEW of 3H DIRECTION

Scale : 5/1
Unit : 1=1/100mm

Version:1


Assembly Plan

Cal. VD78A

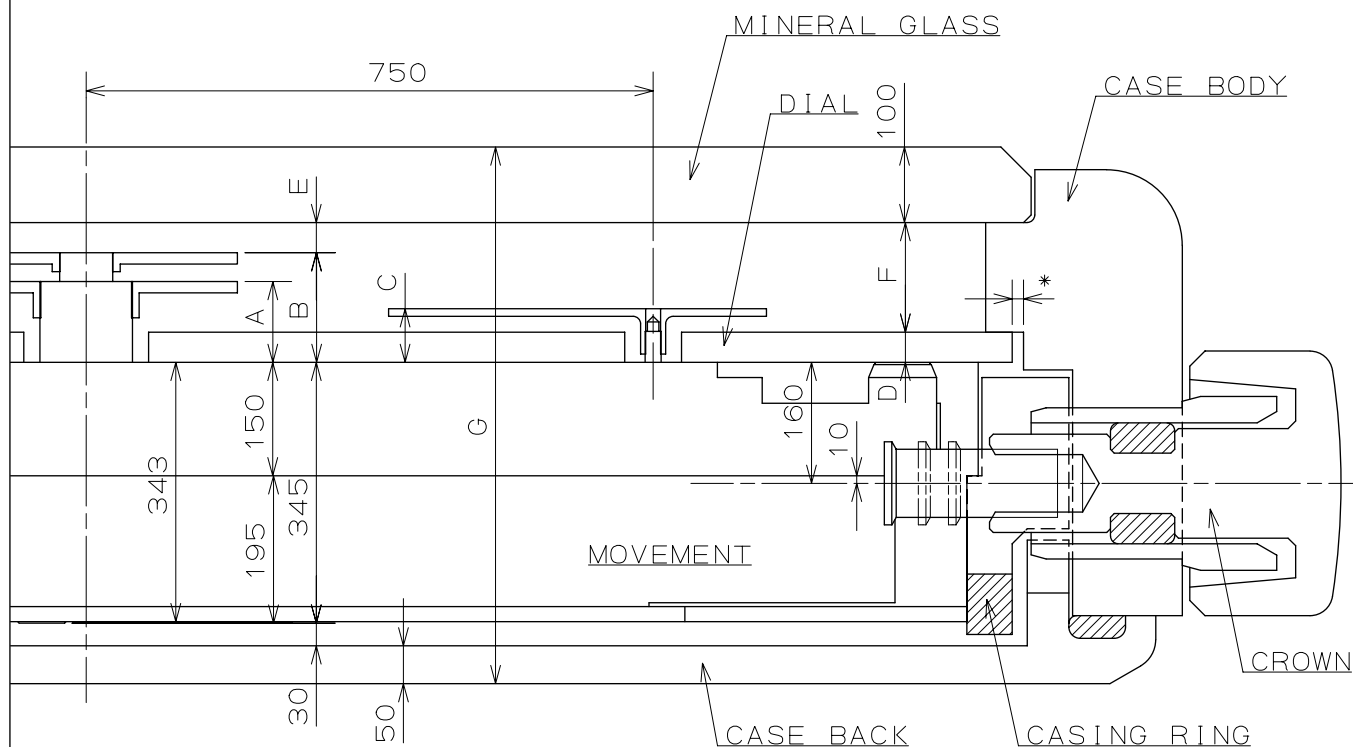

	A	B	C	D	E	F	G
TYPE M	112	150	71	40	35	145	710
TYPE L	180	230	126	85	40	185	795

*Recommended Dimension(Clearance of DIAL and CASE BODY):15

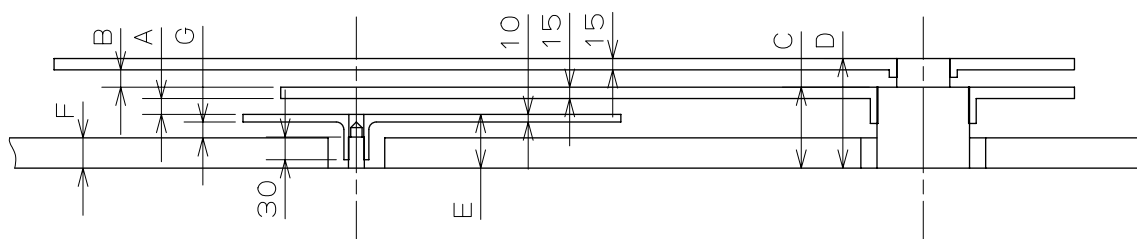

	A	B	C	D	E	F	G
TYPE M	26	23	112	150	71	40	21
TYPE L	39	35	180	230	126	85	31

Scale : 10/1
Unit : 1=1/100mm


Version:6

Hands


Cal. VD78A

TYPE M


MINUTE

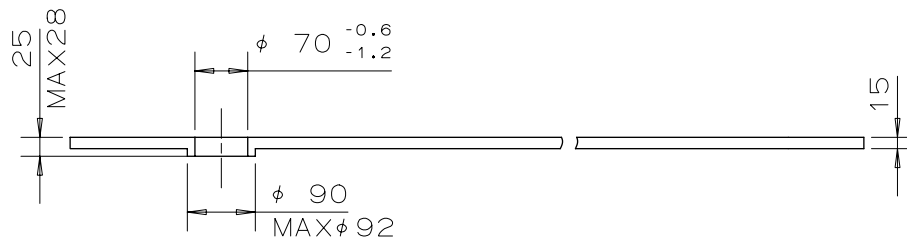

HOUR

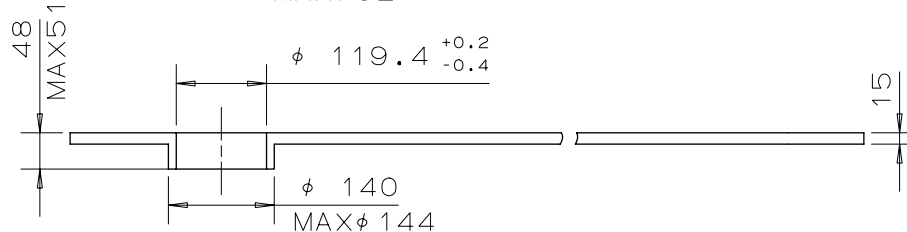


SMALL SECOND

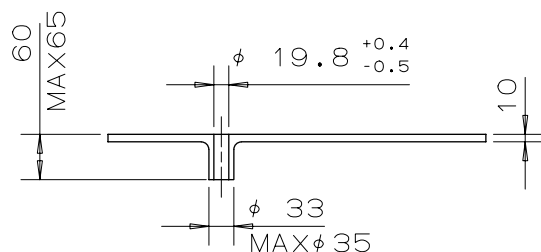


TYPE L


MINUTE

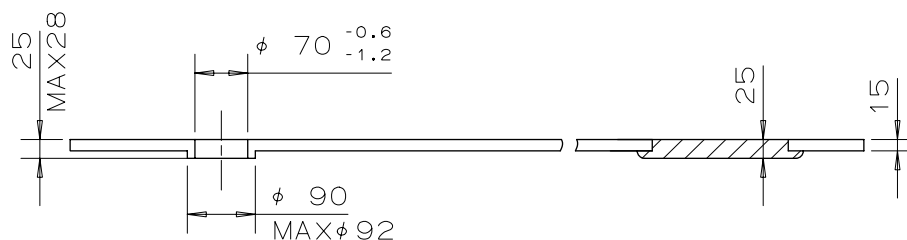

HOUR

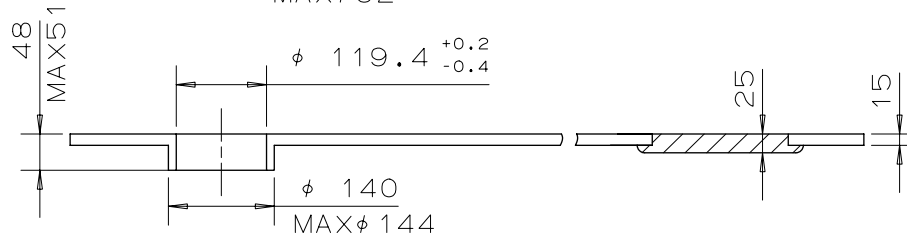

SMALL SECOND

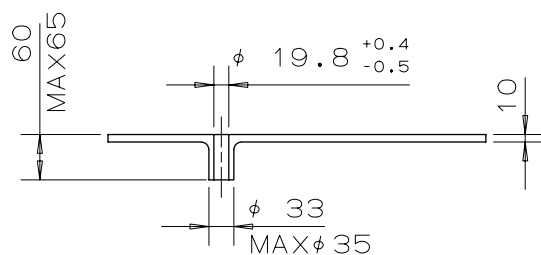

Scale : 10/1

Unit : 1=1/100mm

Version:2