


Cal. 2117

High Hand series of Cal. 2115



1. Basic Specification

Calibre	2117
Ligne	10-1/2'''
Total height	4.15mm
Hands	3
Date	○
Day of week	Not applicable
Battery life	3 Years

< Time Standard >

Type of quartz: Tuning fork type quartz crystal
 Frequency : 32,768Hz
 Accuracy : ± 20 second / month worn under normal circumstances

< Battery >

Type of battery: Silver oxide SR626SW or equivalent

< Others >

Driving system: Two-pole stepping motor
 Jewel : No jewels

< Additional Mechanisms >

Quick Date Change by turning crown
 Second hand stopping at optional position
 Powercell saving reset mechanism
 Over-loading compensation device
 Digital Frequency Control for time adjustment

< Balanceable weight of hand >

Minute hand Max. 0.4 μ N.m
 Second hand Max. 0.09 μ N.m

2. Separated Parts

Calibre	2117
Setting stem	065-299

3. Remarks

< Setting stem >

Length of movement center to stem end : 20.0mm
 Thread : $\Phi 0.9$ mm x 12.38mm

< Measurement of time >

The unit time of measurement must be set at "10s" or integer fold value of 10s owing to the DFC system. And the measurement must be carried out in state of a complete watch.

< Marking on movement >

UNADJUSTED

(CAL NO.)

MIYOTA CO., JAPAN

< Typical clearance >

Mov't - Caseback : minimum 150 μ m or more

Hands - glass : 300 - 450 μ m*


* Depending and subject to the glass and case structure, and hand length.

< How to set time and date >

Date : Pull out the crown to the 1st click position.

Turn the crown anticlockwise for Date.

Time : Pull out the crown to the 2nd click position and turn the crown until the time is set correctly.

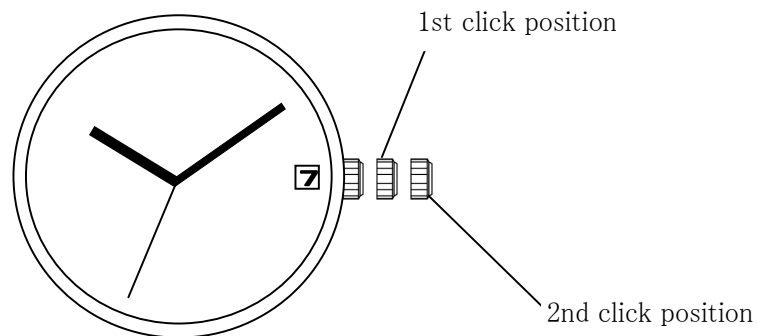

These specifications might be changed without prior notice.