


Cal. 5Y26/5Y36

High Hand series of Cal.5Y20/5Y30

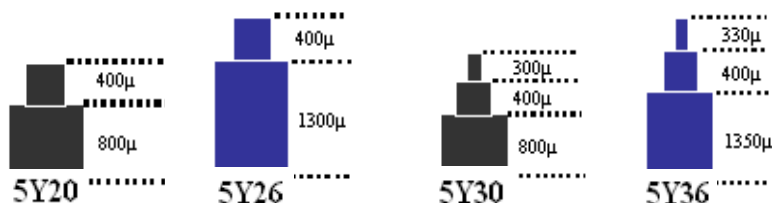

1. Basic Specification

Calibre	5Y26	5Y36
Ligne	5 1/2	
Size	13 x 15.15mm	
Total thickness	2.54mm	
Hands	2	3
Battery life	3	2
Battery	SR 521SW	

< Time Standard >

Type of oscillator : Tuning fork type quartz crystal

Oscillation : 32,768Hz

Accuracy : ± 20 second / month worn under normal circumstances

< Battery >

Type of battery : Silver oxide SR521SW or equivalent 5.8Φ x 21

< Others >

Driving system : Two-pole stepping motor

Jewel : No jewels

< Balanceable weight of hand >

Minute hand Max. 0.3 μN.m

Second hand Max. 0.0235 μN.m (5Y36)

< Adjustment of accuracy >

Digital Frequency control (DFC)

No trimmer

2. Separated Parts

Parts Name	Parts Code
Hour wheel	075-323
Dial washer	078-440
Setting stem	065-403

3. Remarks

< Setting stem >

Setting Stem: 065-403

Length of movement center to stem end : 20.0mm

Thread : Φ0.9mm x 12.38mm

< Measurement of time >

The unit time of measurement must be set at "10s" or an integer fold value of 10s. Owing to the DFC system. And the measurement must be carried out in state of a complete watch.

< Marking on movement >

UNADJUSTED NO JEWELS

(CAL NO.)

MIYOTA CO., JAPAN

< Typical clearance >

Between case and movement

Mov't - Caseback minimum 150 μm or more

Top of hands - Glass 300 - 450 μm*

* Depending and subject to the glass and case structure, and hand length.

These specifications might be changed without prior notice.