


A

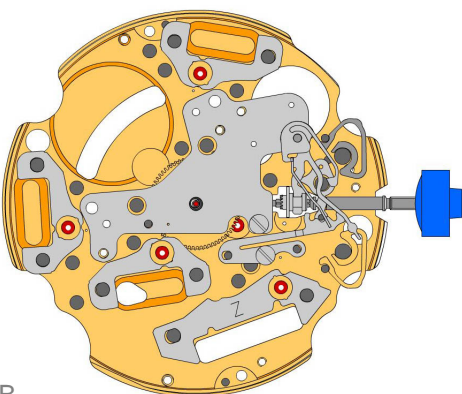

B

2000.574.G

1.



Main plate

3305.275.CO

2.



Cannon pinion with driver (Aig.1)

2030.017.CO

3.



Centre bridge

Centre bridge held by 1 screw 4000.250.

4000.250

4.



Screw

3001.055.FI

5.



Sliding pinion

3000.177.CO

6.



Setting stem

3017.049

7.



Setting lever

3905.049

8.



Setting lever jumper (3 positions)

Setting lever jumper held by 1 screw 4000.250.

4000.250

9.



Screw

3015.081

10.



Yoke (3 positions)

3905.067

11.



Yoke spring

Tensioning the spring arm.

3406.030

12.



Pusher jumper B

Put the grey jumper between the two posts on the further side.

3406.038

13.



Pusher jumper A

Put the yellow jumper between the two posts on the closer side.

3622.040

14.



Stator

Mark [Z] on stator.

3622.039

15.



Stator (counter 6h, 9h and chrono)

3622.039

16.




Stator (counter 6h, 9h and chrono)

3622.039

17.



Stator (counter 6h, 9h and chrono)

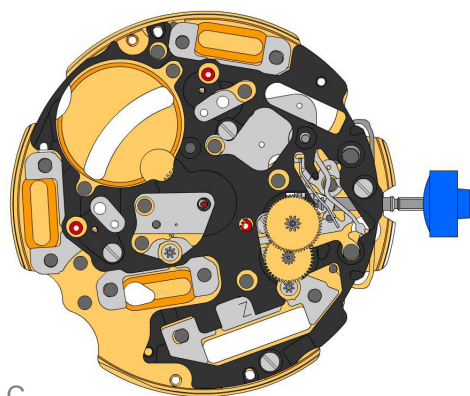

C

3603.079  
18.  Plastic bracket  
Plastic bracket held by 4 screws 4000.250.


4000.250  
19.  Screw

3715.094.RK  
20.  Rotor


3715.094.RK  
21.  Rotor


3147.046.CO  
22.  Intermediate wheel

3136.142.CO  
23.  Second wheel (long)

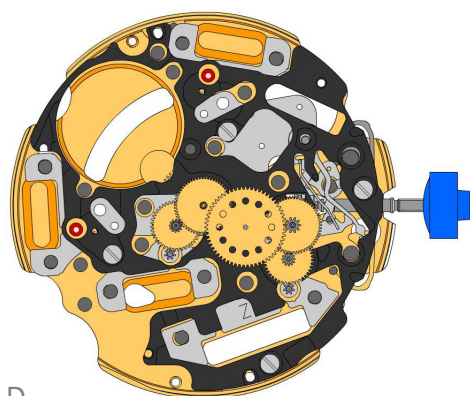


D


3147.047.CO  
24.  Intermediate wheel (chrono)

3136.143.CO  
25.  Chronograph wheel (Aig.1)

3122.056.CO  
26.  Third wheel

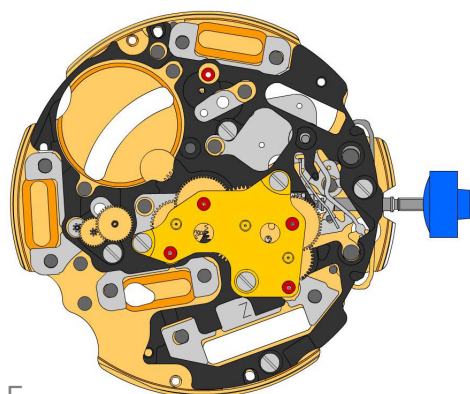

E


2020.148.G  
27.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.

4000.250  
28.  Screw


3715.095.RK  
29.  Rotor

3147.059.CO  
30.  Intermediate wheel (counter)

3402.006.CO  
31.  Minute counting wheel

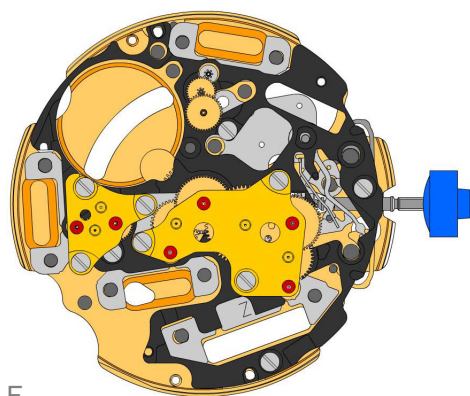


F


2020.149.G  
32.  Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
33.  Screw


3715.104.RK  
34.  Rotor

3147.059.CO  
35.  Intermediate wheel (counter 12h)


3402.006.CO  
36.  Minute counting wheel

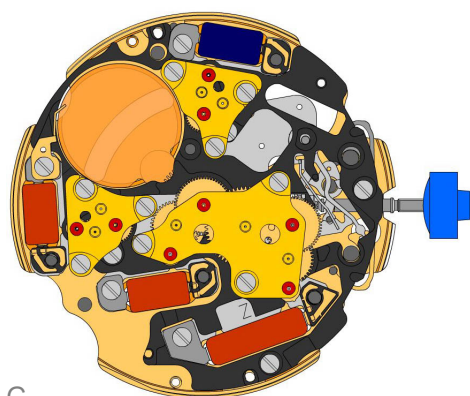



G


2020.149.G  
37.  Counter train wheel bridge  
Counter train wheel bridge held by 3 screws 4000.250.

4000.250  
38.  Screw

3621.053.RK  
39.  Coil  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
40.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK  
41.  Coil (counter 9h, chrono)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.


3621.055.RK  
42.  Coil (counter 6h)  
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250  
43.  Screw


3601.118  
44.  Contact strip  
Contact strip held by 1 screw 4000.250.

4000.250  
45.  Screw

3603.034  
46.  Battery insulator

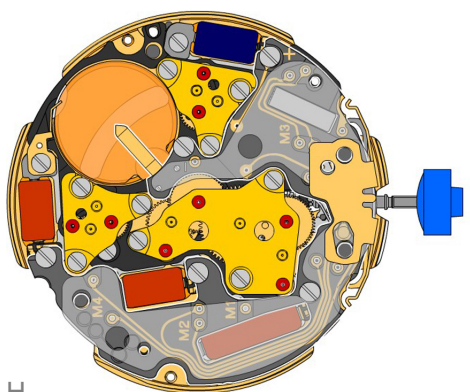


H

3612.210.5030  
47.  Electronic module  
Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.

4000.248  
48.  Screw

3603.069  
49.  Circuit insulator

3601.107.G  
50.  Pusher contact spring

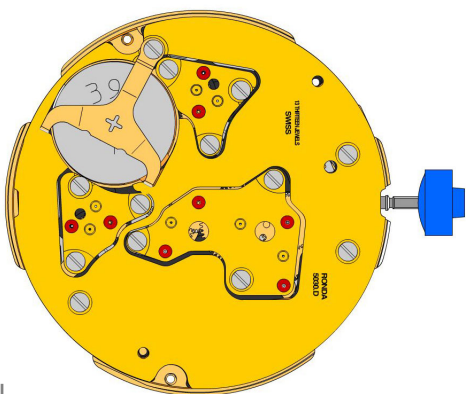


2130.137.G.M01.5030D  
51.  **Electronic module cover**  
Electronic module cover held by 3 screws 4000.250.





3600.010.HGF  
52.  **Battery 395**


3601.109.G  
53.  **Bridle +**  
Bridle held by 1 screw 4000.250.

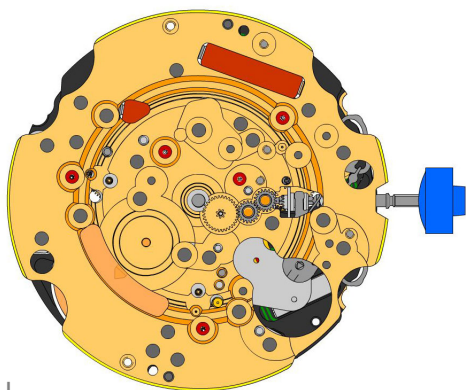4000.250  
54.  **Screw**







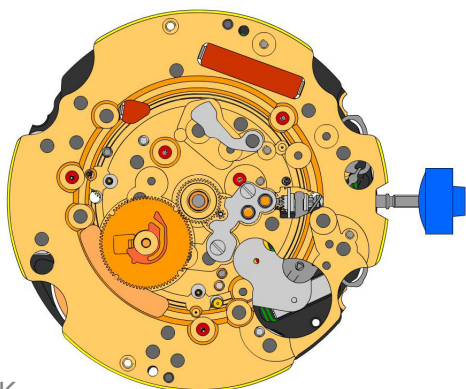


J

2000.574.G 55.		Main plate
3004.164 56.		Setting wheel
3004.164 57.		Setting wheel
3007.054.CO 58.		Minute wheel






K

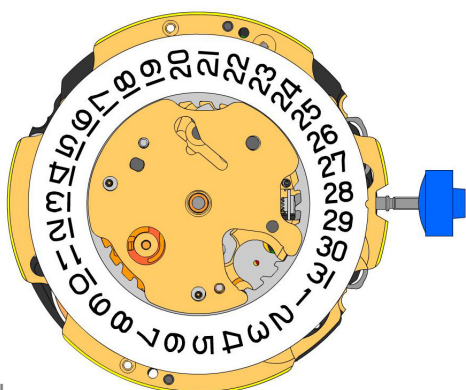2130.143 59.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 60.		Screw
3301.241 61.		Hour wheel (Aig.1)
3315.016 62.		Friction spring
3004.224.CO 63.		Date indicator driving wheel
3500.049 64.		Date jumper







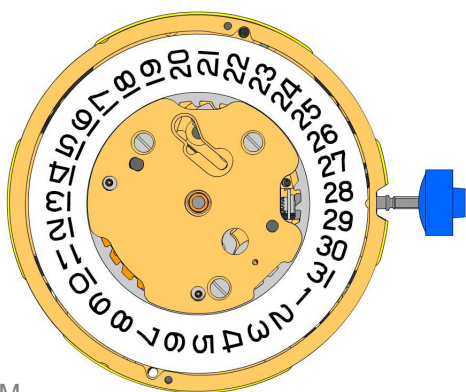



L


3504.208.AB.1.A 65.		Date indicator (standard) Nick of the indicator at 3 o'clock.
2130.141 66.		Date indicator maintaining plate Date indicator maintaining plate held by 1 screw 4000.250.




M

3905.070 67.		<b>Date jumper spring</b> Insert the date jumper spring in the provided opening.
2130.140.G 68.		<b>Date mechanism maintaining plate</b> Date mechanism maintaining plate held by 2 screws 4000.250.
4000.250 69.		<b>Screw</b>
3506.072.G 70.		<b>Dial support</b>
8200 71.		<b>Moebius 8200</b>
9014 72.		<b>Moebius 9014</b>
124 73.		<b>Jismaa 124</b>
9020 74.		<b>Moebius 9020</b>



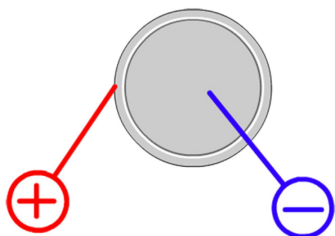


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

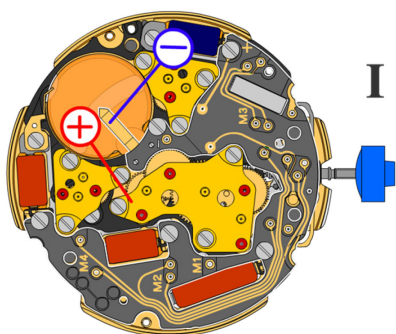


*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*

Typical consumption	<b>1.32 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Instantaneous rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.30 V</b>

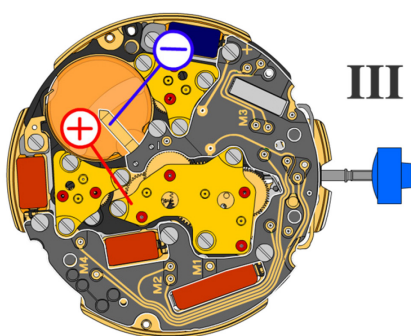

*Setting stem in position III, 60 s measuring interval:*

Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

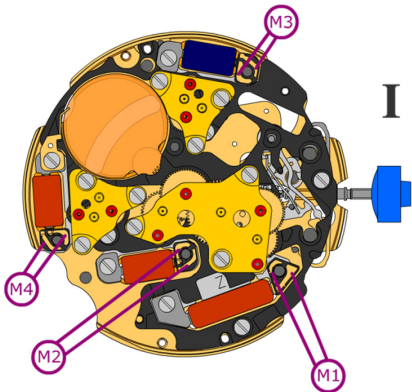


Coil resistance M1 **1.90 k $\Omega$  .. 2.10 k $\Omega$**


Coil resistance M2 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

Coil resistance M3 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

Coil resistance M4 **2.20 k $\Omega$  .. 2.40 k $\Omega$**

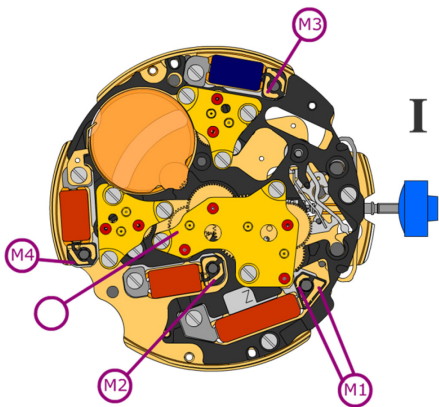

Coil resistance M1/M2/M3/M4  **$\infty$  k $\Omega$**

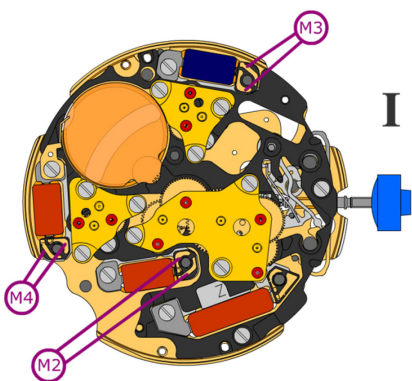

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit  
M2/M3/M4 **1.30 V**