


RONDA powertech 500 and 762E, 763E

Affordable metal movements
for reliable quality watches

Caliber 503S – 10½'''

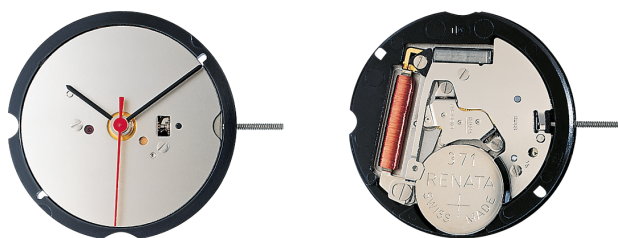

Product Specifications

Analog quartz movement

Line powertech

Caliber 503S

Size 10½'''

Version Swiss Made 1 Jewels / nickel plated
Swiss Parts 1 Jewels / nickel plated

Battery life 24 Months

Hand fitting height 1

Features

- Metal movement, repairable
- Power saving mechanism with pulled out stem: Reduction of consumption approximately 70%
- Interchangeability: All versions 10½''' with same movement height 3.00 mm and stem height 1.50 mm
- Very powerful stepping motor
- Fix motor pulse

Functions

- Option for second disc
- 3 hands

Technical Specifications

Diameter Total	23.90 mm
Case fitting	23.30 mm
Movement height	3.00 mm
Height over Battery	3.25 mm
Movement rest	0.80 mm
Height over stem	1.50 mm
Length of stem travel	0.45 mm
Stem thread	0.90 mm
Battery type	371
Battery voltage	1.5 V
Battery life	24 Months
Current consumption – typical	2.4 µA
Current consumption – maximum	2.65 µA
Useful torque second – typical	9 µNm
Useful torque minute – typical	450 µNm
Operating temperature	0 - 50 °C
Instantaneous rate	-10/ +20 sec/month
Resistance to magnetic fields	18.8 Oe
Resistance against shock	NIHS 91-10

Watch production

Drawing Casing ring (standard, PDF)
 Drawing Dial (stem 3h, PDF)
 Drawing Hand fitting (hand height 1-2, PDF)
 Drawing Hand fitting (hand height 6, PDF)
 Drawing Stem
 Movement holders for T2 (PDF)

Watch repairs

Technical instruction (PDF)