


A

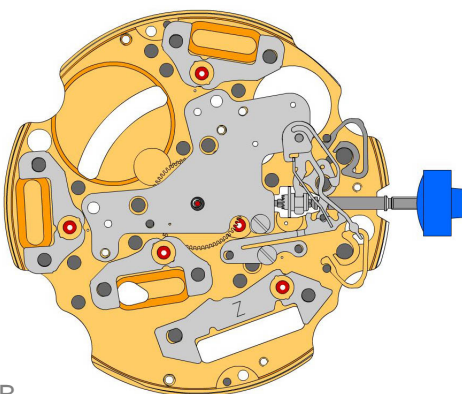

B

2000.574.G

1.



Main plate

3305.275.CO

2.



Cannon pinion with driver (Aig.1)

2030.017.CO

3.



Centre bridge

Centre bridge held by 1 screw 4000.250. Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.59 must be exchanged together.

4000.250

4.



Screw

3001.055.FI

5.



Sliding pinion

3000.177.CO

6.



Setting stem

3017.049

7.



Setting lever

3905.049

8.



Setting lever jumper (3 positions)

Setting lever jumper held by 1 screw 4000.250.

4000.250

9.



Screw

3015.081

10.



Yoke (3 positions)

Parts 3015.081 and 3905.067 must be exchanged together.

3905.067

11.



Yoke spring

Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.

3406.030

12.



Pusher jumper B

Put the grey jumper between the two posts on the further side.

3406.038

13.



Pusher jumper A

Put the yellow jumper between the two posts on the closer side.

3622.040

14.



Stator

Mark [Z] on stator.

3622.039

15.



Stator (counter 6h, 9h, chrono)

3622.039

16.




Stator (counter 6h, 9h, chrono)

3622.039

17.



Stator (counter 6h, 9h, chrono)

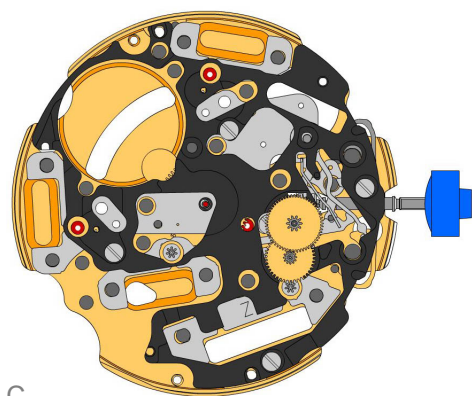

C


3603.079
18.  Plastic bracket
Plastic bracket held by 4 screws 4000.250.


4000.250
19.  Screw

3715.094.RK
20.  Rotor


3715.094.RK
21.  Rotor


3147.046.CO
22.  Intermediate wheel

3136.142.CO
23.  Second wheel (long)

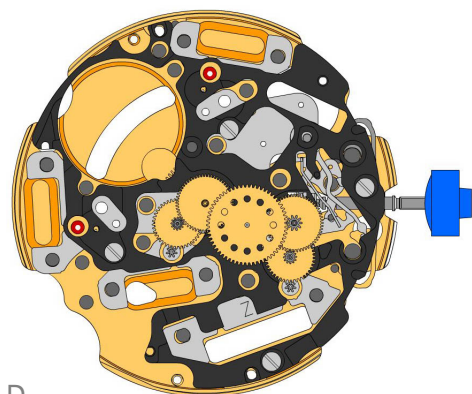


D


3147.047.CO
24.  Intermediate wheel (chrono)

3136.143.CO
25.  Chronograph wheel (Aig.1)

3122.056.CO
26.  Third wheel

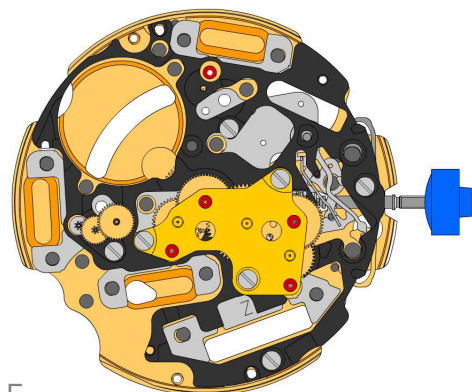

E


2020.148.G
27.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.

4000.250
28.  Screw

3715.095.RK
29.  Rotor

3147.048.CO
30.  Intermediate wheel (counter)

3402.006.CO
31.  Minute counting wheel

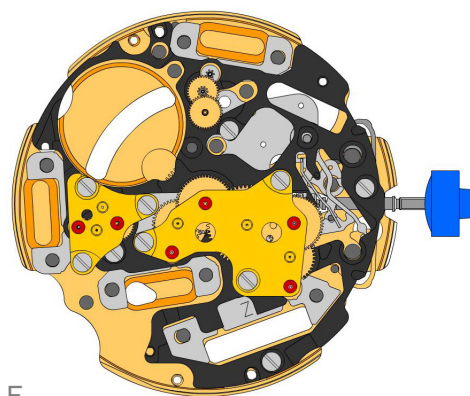

F

2020.149.G
32.



Counter train wheel bridge
Counter train wheel bridge held by 3 screws 4000.250.

4000.250
33.



Screw

3715.095.RK
34.



Rotor

3147.053.CO
35.




Intermediate wheel (counter 1/10sec)

3402.009.CO
36.



Counting wheel 1/10 sec
Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.59 must be exchanged together.

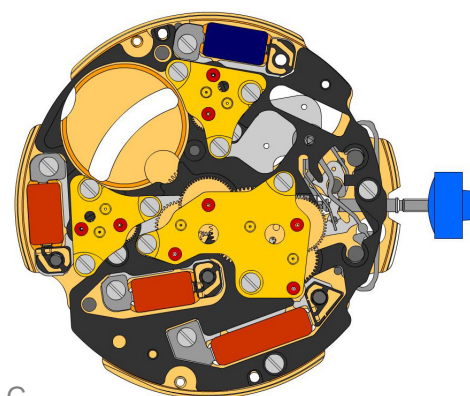

G

2020.149.G
37.



Counter train wheel bridge
Counter train wheel bridge held by 3 screws 4000.250.

4000.250
38.



Screw

3621.053.RK
39.



Coil
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK
40.



Coil (counter 9h, chrono)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.054.RK
41.



Coil (counter 9h, chrono)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

3621.055.RK
42.




Coil (counter 6h)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.

4000.250
43.



Screw

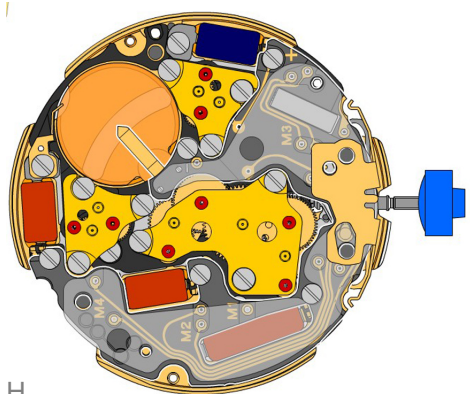

H

3601.118
44.



Contact strip
Contact strip held by 1 screw 4000.250.

4000.250
45.



Screw

3603.034
46.



Battery insulator

3612.144.5040
47.



Electronic module
Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.

4000.248
48.



Screw

3603.069
49.




Circuit insulator

3601.107.G
50.



Pusher contact spring

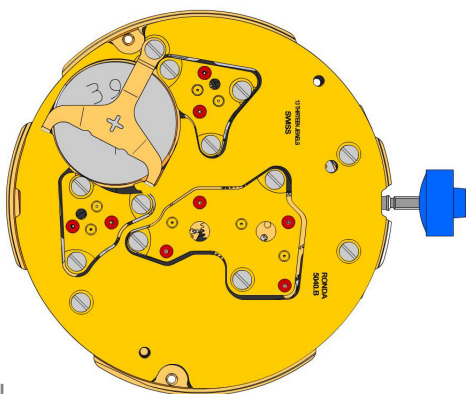

2130.137.G.M01.5040B
51.



Electronic module cover
Electronic module cover held by 3 screws 4000.250.

3600.010.HGF
52.



Battery 395

3601.109.G
53.




Bridge +
Bridge held by 1 screw 4000.250.


4000.250
54.






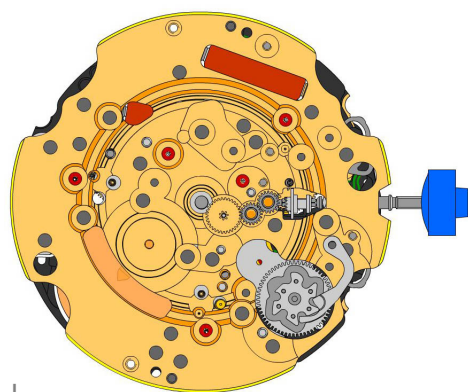



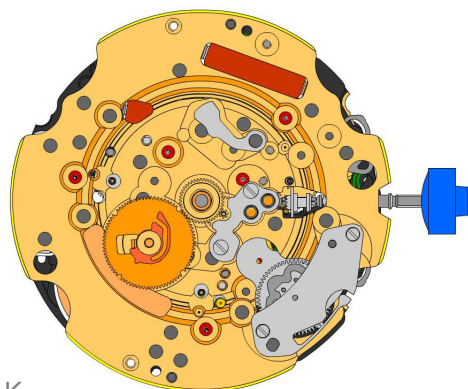






Screw




J




K


2000.574.G 55.		Main plate
3004.164 56.		Setting wheel
3004.164 57.		Setting wheel
3007.054.CO 58.		Minute wheel
2130.143 59.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 60.		Screw
3004.223 61.		Tens indicator driving wheel Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.59 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 62.		Tens jumper Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.59 must be exchanged together.
2130.142 63.		Tens jumper maintaining plate Tensioning the spring arm. Tens jumper maintaining plate held by 2 screws 4000.306.
4010.306 64.		Screw
3301.241 65.		Hour wheel (Fig.1)
3315.016 66.		Friction spring
3004.224.CO 67.		Date indicator driving wheel
3500.049 68.		Date jumper

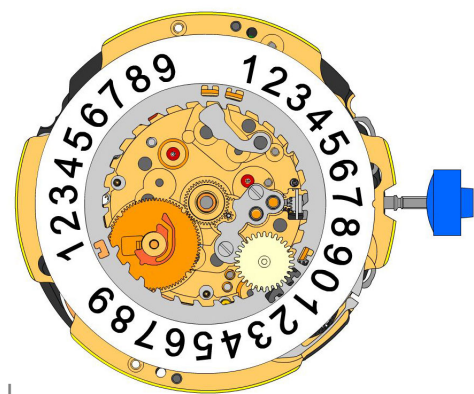



L


3504.214.AF.1.A
69.  Units indicator (standard)

3147.054
70.  Tens intermediate wheel

2130.141
71.  Date indicator maintaining plate
Date indicator maintaining plate

3905.070
72.  Date jumper spring
Insert the date jumper spring in the provided opening.

3504.216.AF.1.A
73.  Tens indicator (standard)
Nick of the indicator at 3 o'clock.

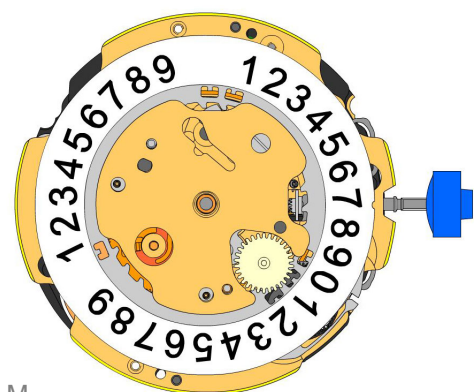


M

2130.140.G
74.  Date mechanism maintaining plate
Date mechanism maintaining plate held by 2 screws 4000.250

4000.250
75.  Screw

3506.072.G
76.  Dial support

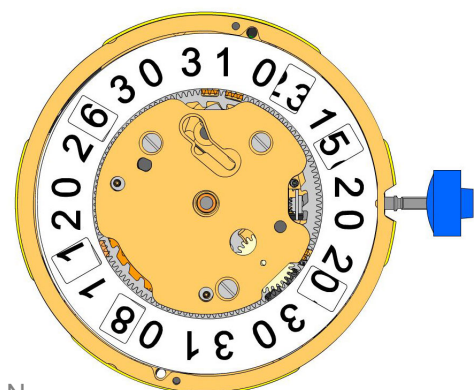


N

8200
77.  Moebius 8200


9014
78.  Moebius 9014

124
79.  Jismaa 124

9020
80.  Moebius 9020

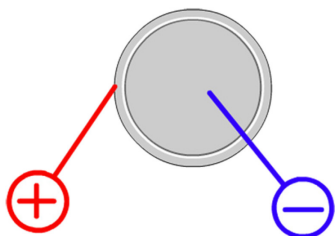


Battery	395
Voltage	1.55 V

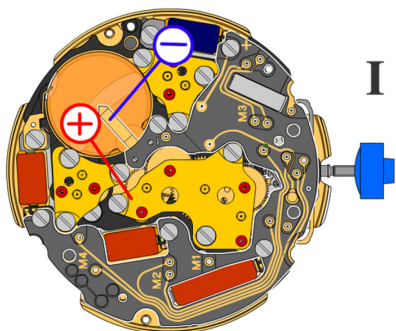


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.32 μA
Maximal consumption	1.65 μA
Instantaneous rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.30 V

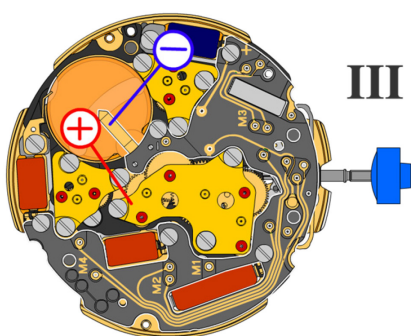

Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

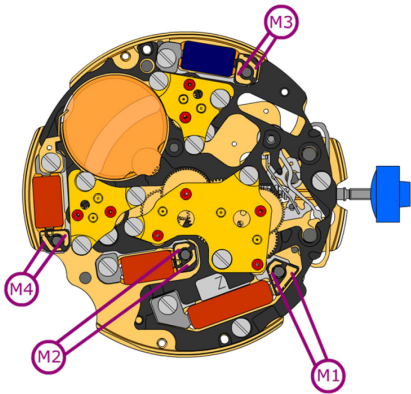


Coil resistance M1 **1.90 k Ω .. 2.10 k Ω**


Coil resistance M2 **2.20 k Ω .. 2.40 k Ω**

Coil resistance M3 **2.20 k Ω .. 2.40 k Ω**

Coil resistance M4 **2.20 k Ω .. 2.40 k Ω**

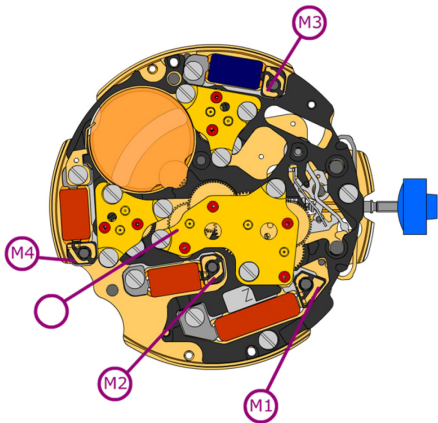

Coil isolation M1/M2/M3/M4 **∞ k Ω**

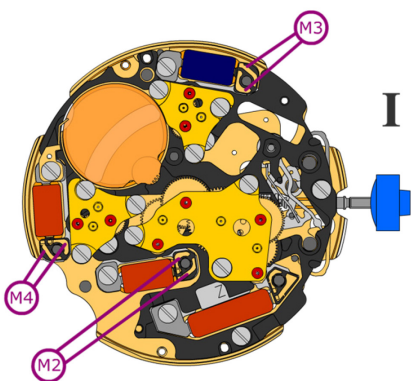

Signal generator (4.9 ms, 8 Hz):

Lower working voltage limit
M2/M3/M4 **1.30 V**