# **RONDA startech**

Cal. 5040.B

English

User's Manual





RONDA is a supplier of watch movements including their operating instructions. Please refer to the watch retailer, service centre or manufacturer, should you have any questions regarding the watch. All relevant contact information can be found in your sales and/or guarantee documents.


X


Battery type: 395 (diameter 9.5mm x 2.6mm / SR 927 SW) Accuracy: +20 / -10 seconds per month

ter Push-button A Minute co **Chronograph: Basic function** Description of the display and control buttons ~ 20 60 (Start / Stop / Reset) - pr Example: ) **j** Display elements Control buttons 1 Start: Press push-button A. Stop: to stop the timing, press push-button A once more and read the three chronograph hands: 4min/38sec/7/10 sec Date Second hand Push button A Minute hand. 泪 Crown hand . Zero positioning: Press push-button B. (The three chronograph hands will be reset to their zero positions). \_ Push button B Centre stop-second Minute counter -1/10 second counter (houer counter after 30 minutes) ×. Push-button B

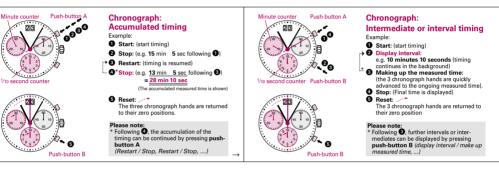

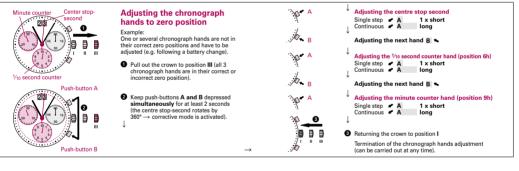





### Setting the time

- Pull out the crown to position III (the watch stops).
- 2 Turn the crown until you reach the correct time 8:45.
- 3\*Push the crown back into position I.

rease note: In order to set the time to the exact second, must be pulled out when the second hand is in position «60». Once the hour and minute hands have been set, must be pushed back into position I at the exact second. se note





### Setting the date (quick mode)

- Pull out the crown to position II (the watch continues to run).
- 2 Turn the crown until the correct date 01 appears.
- Push the crown back into position I.

Please note: During the date changing phase between 9 PM and 12 PM; the date must be set to the date of the following day.

An extreme acceleration in setting the date with quick mode can induce a false date indi-cation. The synchronization is re-established by setting the date from 01 till 31 (crown in position II).

- Pull out the crown to position III (the watch stops).
- Ø Turn the crown until the correct date appears.

6 <sup>6</sup>Continue to turn the crown until the correct time 8:30 PM appears.

Push the crown back into position I.

Please note: \* To set your watch to the exact second, please refer to the chapter entitled «setting please refer to the chepton the time». \*\*Please observe the AM/PM clock rhythm.

## Setting the date/time following a battery change

- Example: Date / time on the watch: 17 / 1:25 AM Present date / time: 04 / 8:30 PM
- Pull out the crown to position II (the watch continues to run).
- 2 Turn the crown until yesterday's date appears 03. T





