









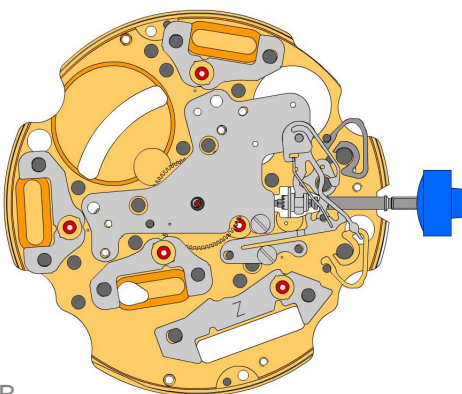








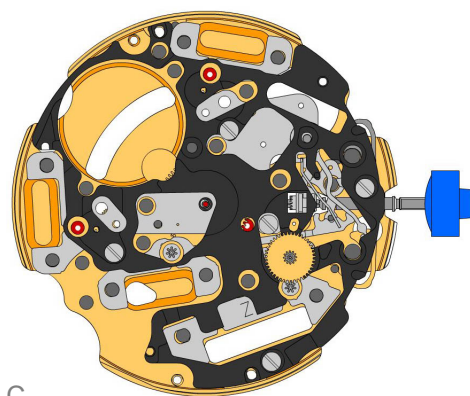


A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244 3.		Hour wheel (counter 24h)
2030.017.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250. Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 10.		Screw
3015.081 11.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 12.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3406.030 13.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 14.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 15.		Stator Mark [Z] on stator.
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)
3622.039 18.		Stator (counter 6h, 9h, chrono)



C


3603.079
19.  Plastic bracket
Plastic bracket held by 4 screws 4000.250.

4000.250
20.  Screw

3715.094.RK
21.  Rotor

3715.094.RK
22.  Rotor

3147.046.CO
23.  Intermediate wheel

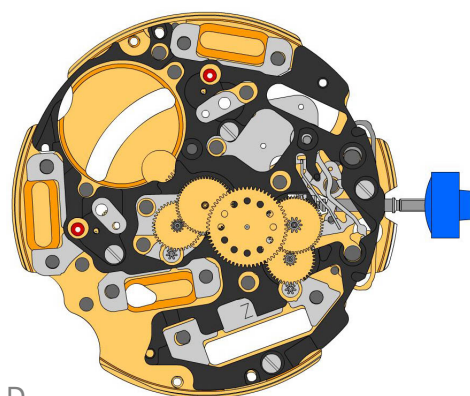


D

3136.142.CO
24.  Second wheel (long)


3147.047.CO
25.  Intermediate wheel (chrono)

3136.144.CO
26.  Chronograph wheel (Aig.2)

3122.056.CO
27.  Third wheel

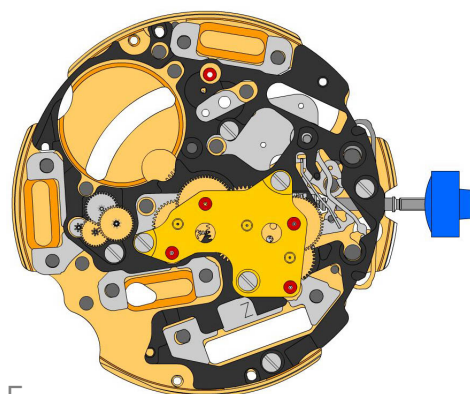

E

2020.148.G
28.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.


4000.250
29.  Screw

3715.095.RK
30.  Rotor






3147.048.CO
31.  Intermediate wheel (counter)

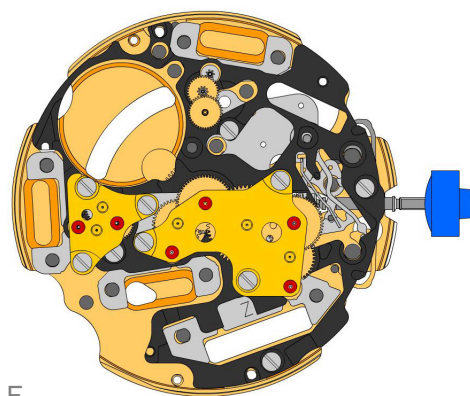
3007.056.CO
32.  Minute wheel (counter 24h)

3402.008.CO
33.  Minute counting wheel







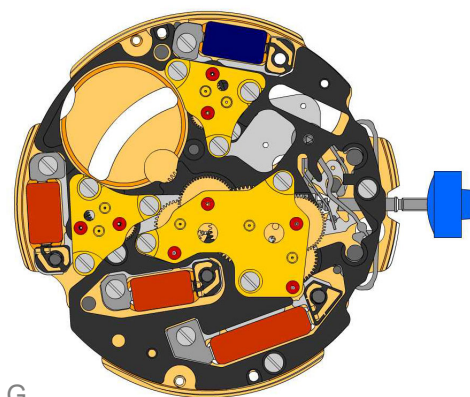






F

2020.149.G 34.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 35.		Screw
3715.095.RK 36.		Rotor
3147.053.CO 37.		Intermediate wheel (counter 1/10sec)
3402.009.CO 38.		Counting wheel 1/10 sec Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together.





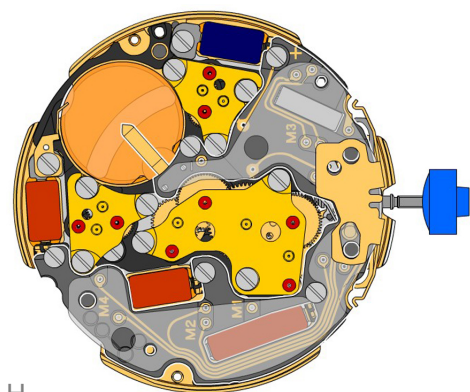


G

2020.149.G 39.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 40.		Screw
3621.053.RK 41.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 42.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 43.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.055.RK 44.		Coil (counter 6h) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
4000.250 45.		Screw
3601.118 46.		Contact strip Contact strip held by 1 screw 4000.250.
4000.250 47.		Screw
3603.034 48.		Battery insulator



H

3612.144.5050 49.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 50.		Screw
3603.069 51.		Circuit insulator
3601.107.G 52.		Pusher contact spring

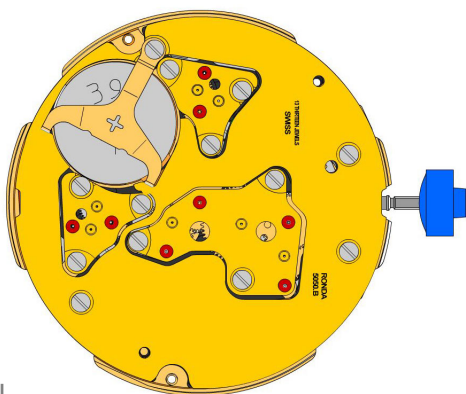

2130.137.G.M01.5050B
53.



Electronic module cover
Electronic module cover held by 3 screws 4000.250.

3600.010.HGF
54.



Battery 395

3601.109.G
55.




Bridge +
Bridge held by 1 screw 4000.250.

4000.250
56.



Screw

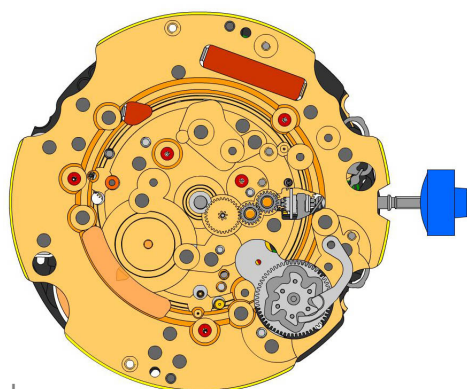


J

2000.574.G
57.  Main plate


3004.164
58.  Setting wheel

3004.164
59.  Setting wheel


3007.054.CO
60.  Minute wheel

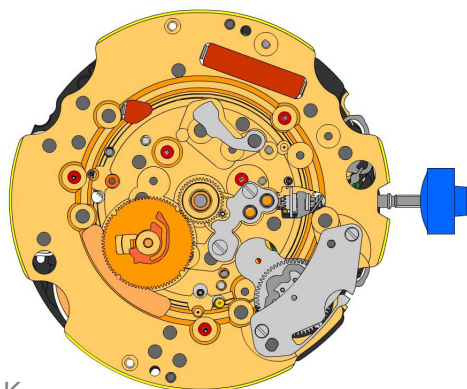


K

2130.143
61.  Minute train bridge
Minute train bridge held by 2 screws 4000.305.

4000.305
62.  Screw

3004.223
63.  Tens indicator driving wheel
Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together. The short tooth of the tens indicator driving wheel must point to the center of the movement.


3500.059
64.  Tens jumper
Parts 2030.017.CO, 3402.009.CO, 3004.223 and 3500.059 must be exchanged together.

2130.142
65.  Tens jumper maintaining plate
Tens jumper maintaining plate held by 2 screws 4000.306. Tensioning the spring arm.


4010.306
66.  Screw

3301.242
67.  Hour wheel (Aig.2)


3315.016
68.  Friction spring

3004.224.CO
69.  Date indicator driving wheel



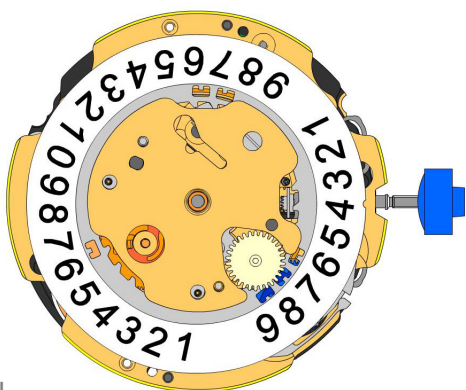

3500.049
70.  Date jumper

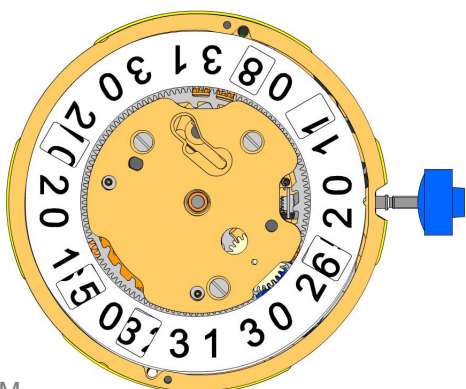









L




M


3504.214.AD.1.A 71.		Units indicator (standard) Nick of the indicator at 3 o'clock.
3147.054 72.		Tens intermediate wheel
2130.141 73.		Date indicator maintaining plate Date indicator maintaining plate held by 1 screw 4000.250.
3905.070 74.		Date jumper spring Insert the date jumper spring in the provided opening.

3504.215.AD.1.A 75.		Tens indicator (standard) Nick of the indicator at 3 o'clock.
2130.140.G 76.		Date mechanism maintaining plate Date mechanism maintaining plate held by 2 screws 4000.250.
4000.250 77.		Screw
3506.072.G 78.		Dial support

8200 79.		Moebius 8200
9014 80.		Moebius 9014
124 81.		Jismaa 124
9020 82.		Moebius 9020

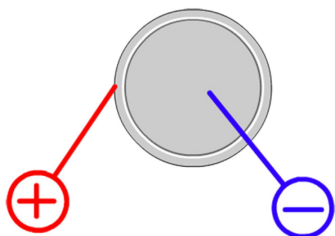


Battery	395
Voltage	1.55 V

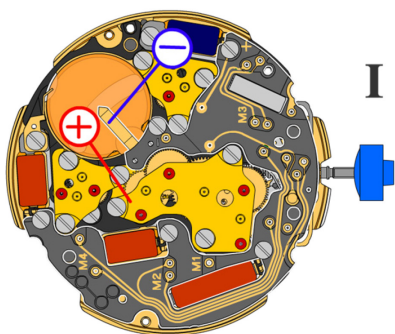


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	μA
Maximal consumption	μA
Instantaneous rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.30 V

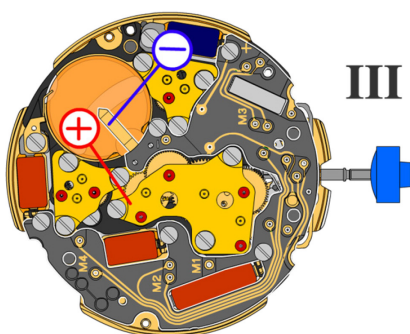

Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

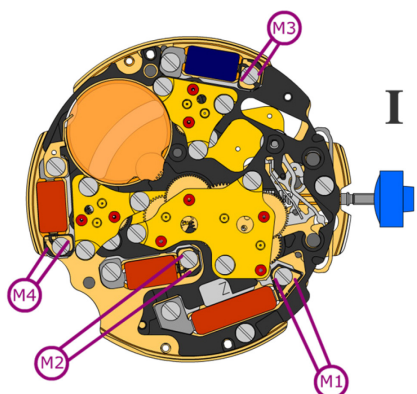


Coil resistance M1 **1.90 k Ω .. 2.10 k Ω**


Coil resistance M2 **2.20 k Ω .. 2.40 k Ω**

Coil resistance M3 **2.20 k Ω .. 2.40 k Ω**

Coil resistance M4 **2.20 k Ω .. 2.40 k Ω**

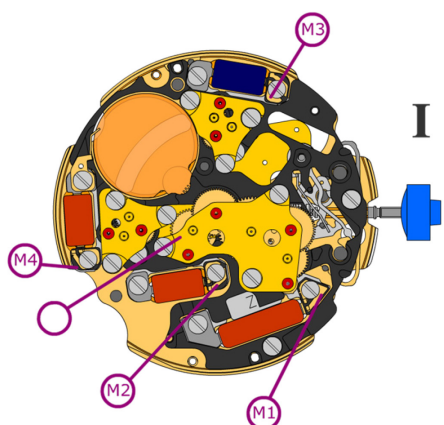

Coil isolation M1/M2/M3/M4 **∞ k Ω**

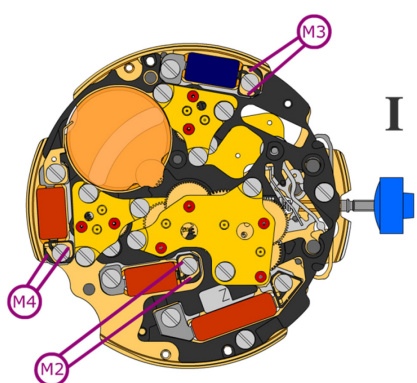

Signal generator (4.9 ms, 8 Hz):

Lower working voltage limit
M2/M3/M4 **1.30 V**