






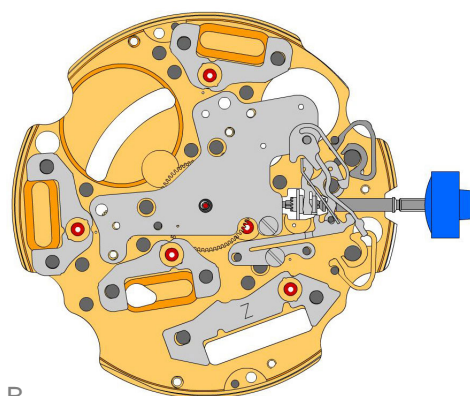











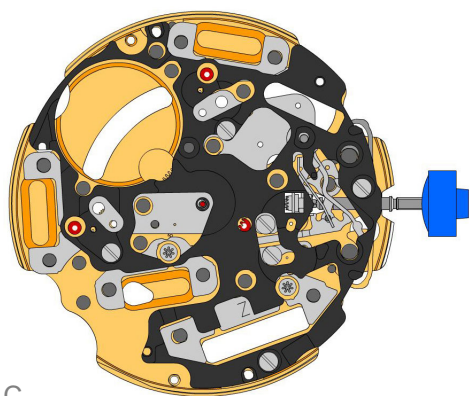


A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.244 3.		Hour wheel (counter 24h)
2030.032.CO 4.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 5.		Screw
3001.055.FI 6.		Sliding pinion
3000.177.CO 7.		Setting stem
3017.049 8.		Setting lever
3905.049 9.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
3015.081 10.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 11.		Yoke spring Tensioning the spring arm.
3406.030 12.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 13.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 14.		Stator Mark [Z] on stator.
3622.039 15.		Stator (counter 6h, 9h, chrono)
3622.039 16.		Stator (counter 6h, 9h, chrono)
3622.039 17.		Stator (counter 6h, 9h, chrono)
4000.250 18.		Screw




C

3603.079  
19.  Plastic bracket  
Plastic bracket held by 4 screws 4000.250.

4000.250  
20.  Screw

3715.094.RK  
21.  Rotor

3715.094.RK  
22.  Rotor

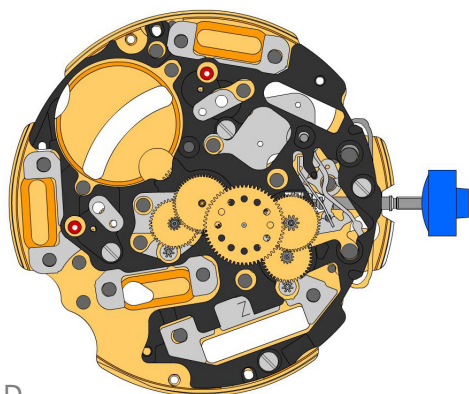

D


3147.046.CO  
23.  Intermediate wheel

3136.142.CO  
24.  Second wheel (long)


3147.047.CO  
25.  Intermediate wheel (chrono)

3136.144.CO  
26.  Chronograph wheel (Aig.2)

3122.056.CO  
27.  Third wheel

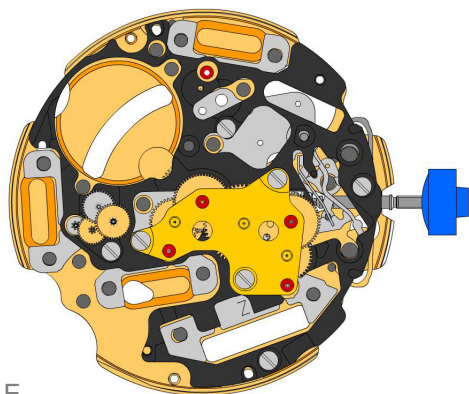

E

2020.148.G  
28.  Train wheel bridge  
Train wheel bridge held by 3 screws 4000.250.


4000.250  
29.  Screw

3715.095.RK  
30.  Rotor






3147.048.CO  
31.  Intermediate wheel (counter)

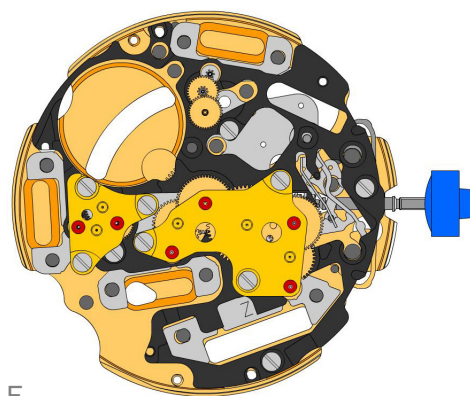
3007.056.CO  
32.  Minute wheel (counter 24h)

3402.008.CO  
33.  Minute counting wheel







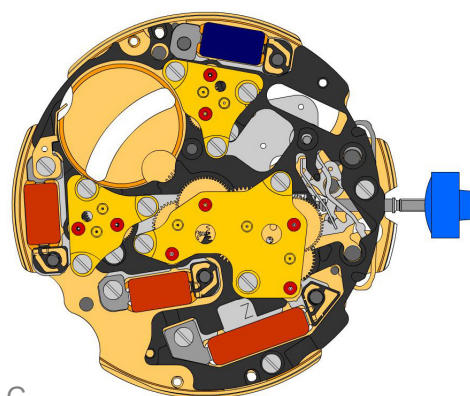


F

2020.149.G 34.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 35.		Screw
3715.095.RK 36.		Rotor
3147.053.CO 37.		Intermediate wheel (counter 1/10sec)
3402.016.CO 38.		Counting wheel 1/10 sec





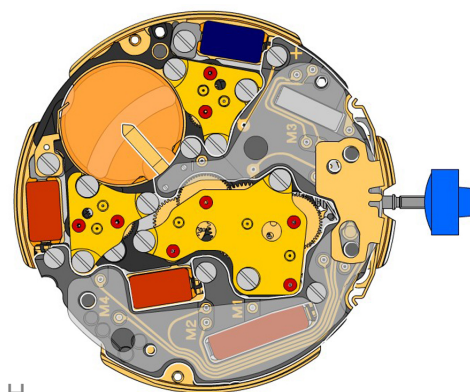


G

2020.149.G 39.		Counter train wheel bridge Counter train wheel bridge held by 3 screws 4000.250.
4000.250 40.		Screw
3621.053.RK 41.		Coil Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 42.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.054.RK 43.		Coil (counter 9h, chrono) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.
3621.055.RK 44.		Coil (counter 6h) Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.



H

3612.144.5050 49.		Electronic module Electronic module held by 5 screws 4000.248. Electronic measurements may be realised now.
4000.248 50.		Screw
3603.069 51.		Circuit insulator
3601.107.G 52.		Pusher contact spring

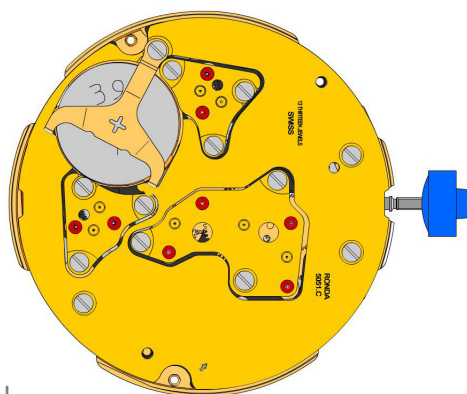


2130.137.G.M01.5051C  
53.  **Electronic module cover**  
Electronic module cover held by 3 screws 4000.250.





3600.010.HGF  
54.  **Battery 395**


3601.109.G  
55.  **Bridle +**  
Bridle held by 1 screw 4000.250.

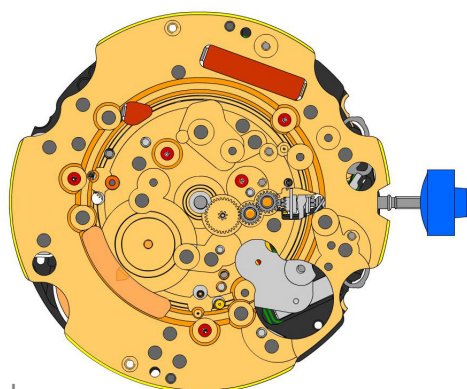4000.250  
56.  **Screw**





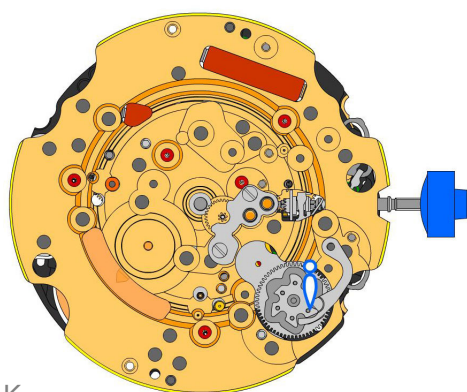


J

2000.574.G 57.		Main plate
3004.164 58.		Setting wheel
3004.164 59.		Setting wheel
3007.054.CO 60.		Minute wheel







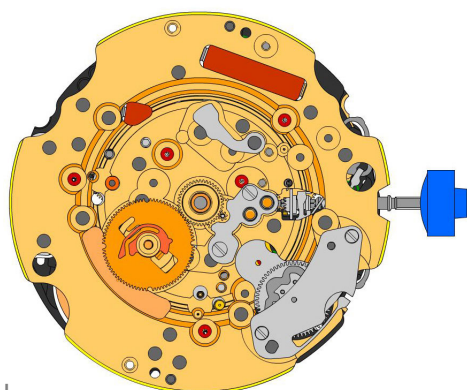

K


2130.143 61.		Minute train bridge Minute train bridge held by 2 screws 4000.305.
4000.305 62.		Screw
3004.227 63.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement.
3500.075 64.		Tens jumper



L

2130.142 65.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.306. Place the spring loaded bracket outside of the tens jumper.
4010.306 66.		Screw
3301.242 67.		Hour wheel (Aig.2)
3315.016 68.		Friction spring
3004.224.CO 69.		Date indicator driving wheel
3500.049 70.		Date jumper



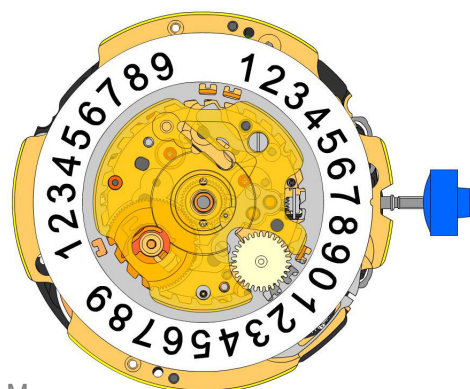

M

3504.214.AF.1.A  
71.



Units indicator (standard)  
Nick of the indicator at 3 o'clock.

3147.054  
72.



Tens intermediate wheel

2130.163  
73.



Date indicator maintaining plate  
Date indicator maintaining plate held by 1 screw 4000.282.

4000.282  
74.




Screw

3905.070  
75.



Date jumper spring  
Insert the date jumper spring in the provided opening.

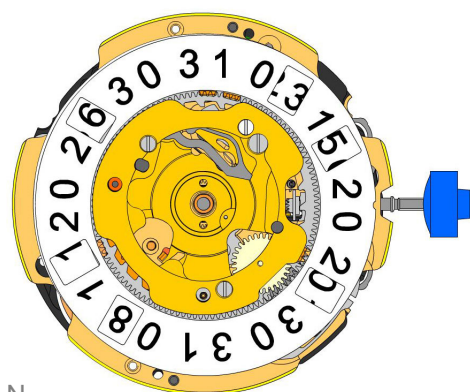

N

3504.216.AF.1.A  
76.



Tens indicator (standard)  
Nick of the indicator at 3 o'clock.

3500.055  
77.



Day jumper

3004.175  
78.



Day finger

2130.162.G  
79.




Date mechanism maintaining plate  
Date mechanism maintaining plate held by 2 screws 4000.312 and 1 screw 4000.300.

4000.312  
80.



Screw

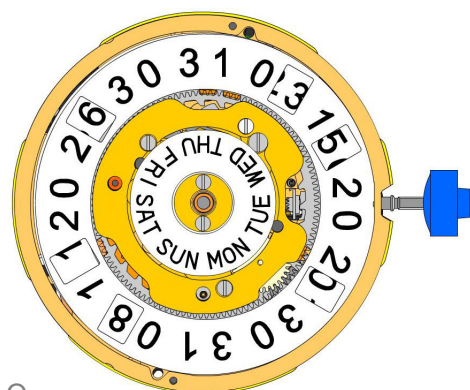

O

3508.155.AQ.E.A  
81.



Day indicator (standard)

2130.164.G  
82.



Day indicator maintaining plate  
Day indicator maintaining plate held by 2 screws 4000.311.

4000.311  
83.








Screw

3506.072.G  
84.




Dial support

8200 85.		Moebius 8200
9014 86.		Moebius 9014
124 87.		Jismaa 124
9020 88.		Moebius 9020

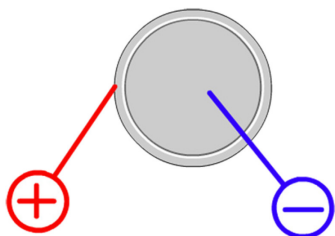


Battery	<b>395</b>
Voltage	<b>1.55 V</b>

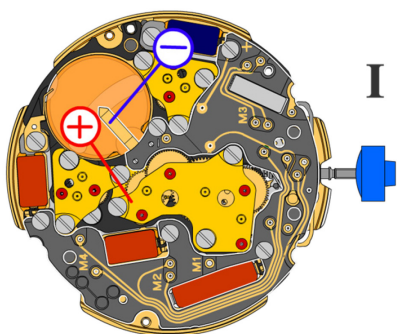

*Setting stem in position I, calendar not in gear,  
60 s measuring interval for rate and consumption:*


Typical consumption	<b>1.32 <math>\mu</math>A</b>
Maximal consumption	<b>1.65 <math>\mu</math>A</b>
Instantaneous rate	<b>-10s/M. .. +20s/M.</b>
Lower working voltage limit	<b>1.30 V</b>

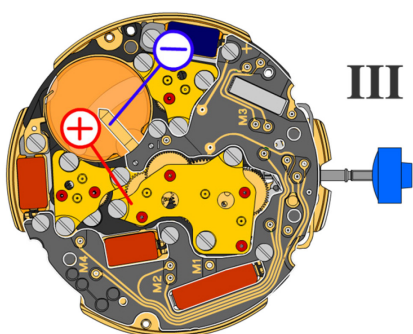

*Setting stem in position III, 60 s measuring interval:*



Typical consumption	<b>0.10 <math>\mu</math>A</b>
Maximal consumption	<b>0.30 <math>\mu</math>A</b>

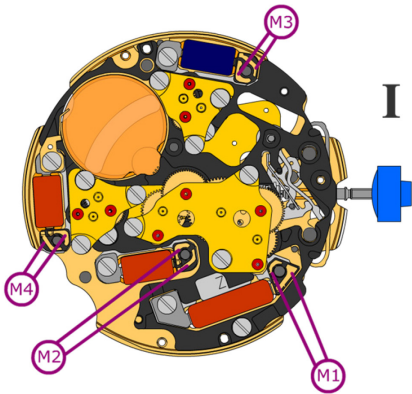


Coil resistance M1 **1.90 k $\Omega$  .. 2.10 k $\Omega$** 

Coil resistance M2 **2.20 k $\Omega$  .. 2.40 k $\Omega$** 

Coil resistance M3 **2.20 k $\Omega$  .. 2.40 k $\Omega$** 

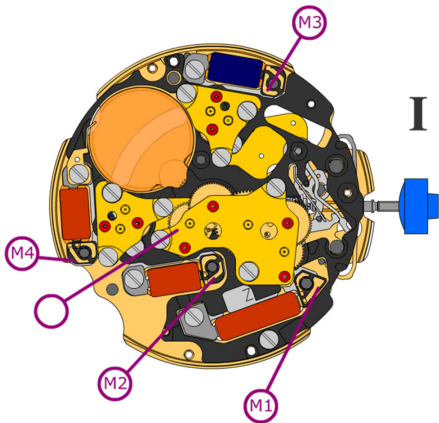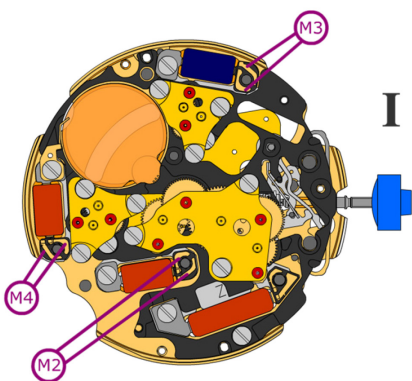Coil resistance M4 **2.20 k $\Omega$  .. 2.40 k $\Omega$** 

Coil isolation M1/M2/M3/M4  **$\infty$  k $\Omega$** 

*Signal generator (4.9 ms, 8 Hz):*

Lower working voltage limit  
M2/M3/M4 **1.30 V**