








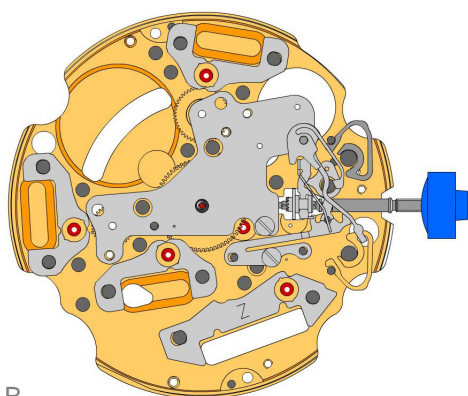










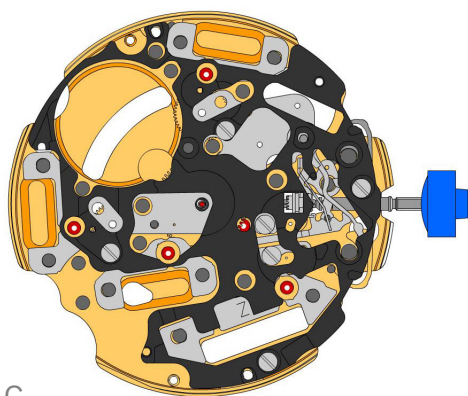


A



B

2000.574.G 1.		Main plate
3305.282.CO 2.		Cannon pinion with driver (Aig.2)
3301.243 3.		Hour wheel (counter 12h) (Alarm)
3301.244 4.		Hour wheel (counter 24h) (Chrono)
2030.017.CO 5.		Centre bridge Centre bridge held by 1 screw 4000.250.
4000.250 6.		Screw
3001.055.FI 7.		Sliding pinion
3000.177.CO 8.		Setting stem
3017.049 9.		Setting lever
3905.049 10.		Setting lever jumper (3 positions) Setting lever jumper held by 1 screw 4000.250.
4000.250 11.		Screw
3015.081 12.		Yoke (3 positions) Parts 3015.081 and 3905.067 must be exchanged together.
3905.067 13.		Yoke spring Tensioning the spring arm. Parts 3015.081 and 3905.067 must be exchanged together.
3406.030 14.		Pusher jumper B Put the grey jumper between the two posts on the further side.
3406.038 15.		Pusher jumper A Put the yellow jumper between the two posts on the closer side.
3622.040 16.		Stator Mark [Z] on stator.
3622.039 17.		Stator (counter 6h, 9h, chrono)
3622.039 18.		Stator (counter 6h, 9h, chrono)
3622.039 19.		Stator (counter 6h, 9h, chrono)




C

3603.079
20.  Plastic bracket
Plastic bracket held by 4 screws 4000.250.

4000.250
21.  Screw

3715.094.RK
22.  Rotor

3715.094.RK
23.  Rotor

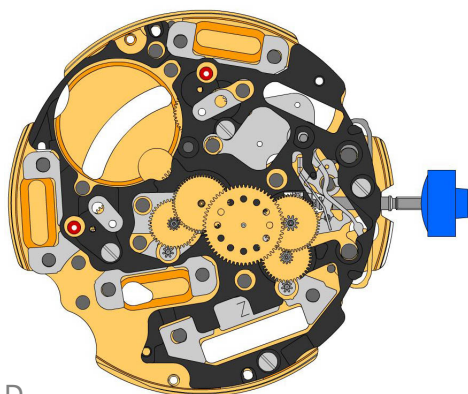

D


3147.046.CO
24.  Intermediate wheel

3136.142.CO
25.  Second wheel (long)


3147.047.CO
26.  Intermediate wheel (chrono)

3136.144.CO
27.  Chronograph wheel (Aig.2)

3122.056.CO
28.  Third wheel

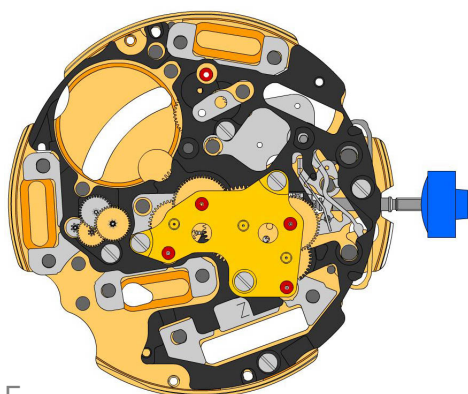


E

2020.148.G
29.  Train wheel bridge
Train wheel bridge held by 3 screws 4000.250.


4000.250
30.  Screw

3715.095.RK
31.  Rotor


3147.048.CO
32.  Intermediate wheel (counter)

3007.056.CO
33.  Minute wheel (counter 24h)

3402.008.CO
34.  Minute counting wheel

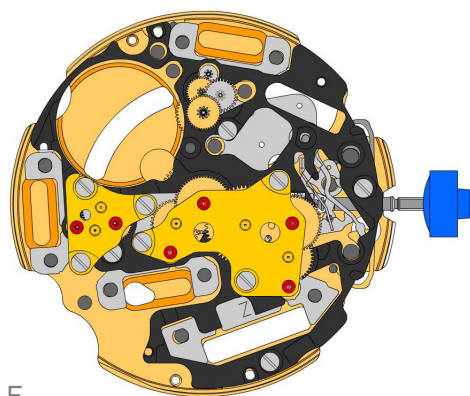

F

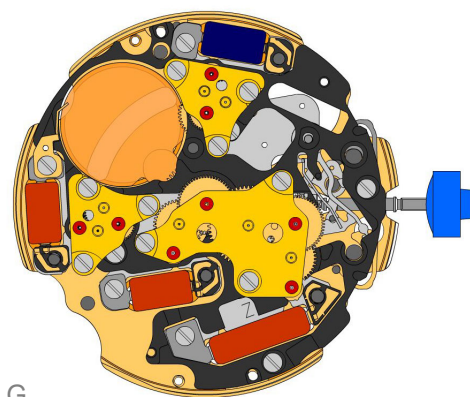

G

2020.149.G
35. Counter train wheel bridge
Counter train wheel bridge held by 3 screws 4000.250.



4000.250
36. Screw



3715.095.RK
37. Rotor



3147.048.CO
38. Intermediate wheel (counter)



3007.055.CO
39. Minute wheel (counter 12h)



3402.007.CO
40. Minute counting wheel



4000.250
41. Screw



2020.149.G
42. Counter train wheel bridge
Counter train wheel bridge held by 3 screws 4000.250.



4000.250
43. Screw



3621.053.RK
44. Coil
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.



3621.054.RK
45. Coil (counter 9h, chrono)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.



3621.054.RK
46. Coil (counter 9h, chrono)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.




3621.055.RK
47. Coil (counter 6h)
Attention: Please hold the coil only on the grey coil core. Coil held by 1 screw 4000.250.




4000.250
48. Screw



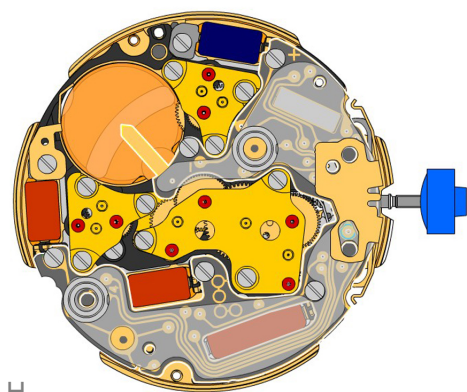



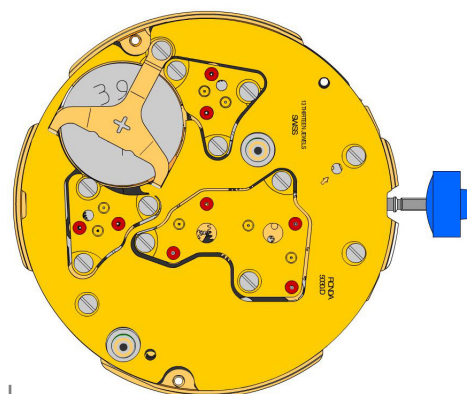










H







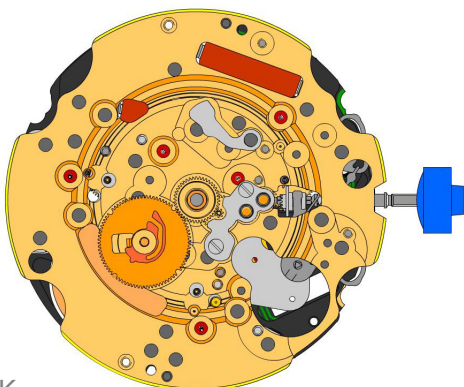
I

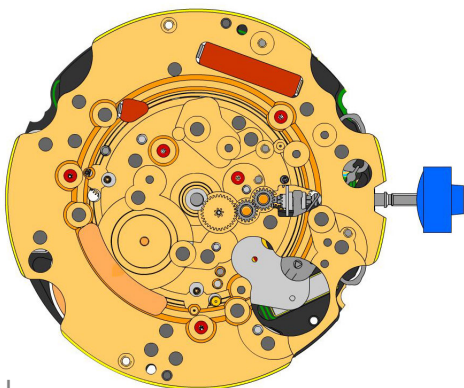3601.118 49.		Contact strip Contact strip held by 1 screw 4000.250.
3603.034 50.		Battery insulator
3612.176.5130 51.		Electronic module Electronic module held by 5 screws 4000.250. Electronic measurements may be realised now.
4000.248 52.		Screw
3603.069 53.		Circuit insulator
3603.070 54.		Contact insulator
3603.070 55.		Contact insulator
3601.107.G 56.		Pusher contact spring
2130.159.G.M01.5130D 57.		Electronic module cover Electronic module cover held by 3 screws 4000.250.
3600.010.HGF 58.		Battery 395
3601.109.G 59.		Bridle + Bridle + held by 1 screw 4000.250.
4000.250 60.		Screw










J

2000.574.G 61.		Main plate
3004.164 62.		Setting wheel
3004.164 63.		Setting wheel
3007.054.CO 64.		Minute wheel




K

2130.143 65.		Minute train bridge Minute train bridge held by 2 screws 4000.250.
4000.305 66.		Screw
3301.242 67.		Hour wheel (Aig.2)
3315.016 68.		Friction spring
3004.224.CO 69.		Date indicator driving wheel
3500.049 70.		Date jumper

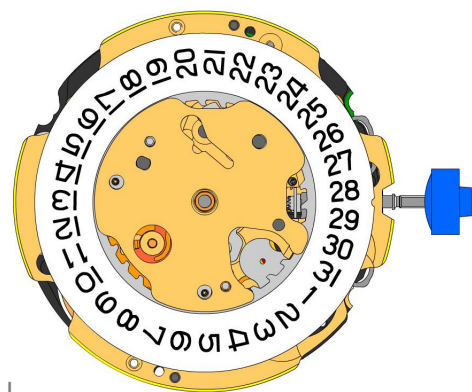

L

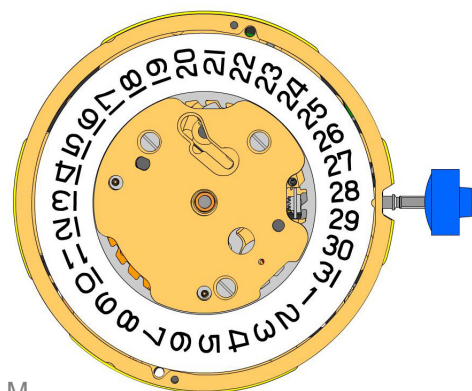

M

3504.208.AB.1.A
71.



Date indicator (standard)
Nick of the indicator at 3 o'clock.

2130.141
72.



Date indicator maintaining plate
Date indicator maintaining plate held by 1 screw 4000.250.

3905.070
73.



Date jumper spring
Insert the date jumper spring in the provided opening.

2130.140.G
74.



Date mechanism maintaining plate
Date mechanism maintaining plate held by 2 screws 4000.250.

4000.250
75.



Screw

3506.072.G
76.



Dial support

8200
77.



Moebius 8200

9014
78.



Moebius 9014

124
79.




Jismaa 124


9020
80.



Moebius 9020

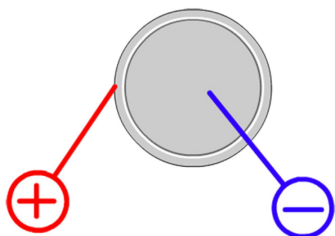


Battery	395
Voltage	1.55 V

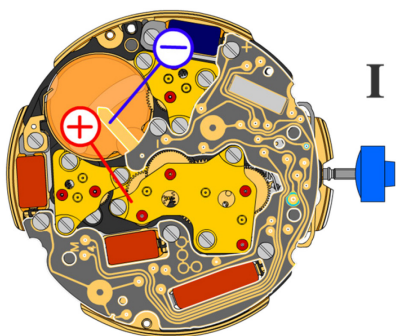


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption	1.48 μA
Maximal consumption	1.65 μA
Instantaneous rate	-10s/M. .. +20s/M.
Lower working voltage limit	1.30 V

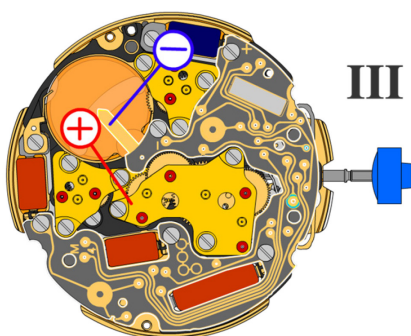

Setting stem in position III, 60 s measuring interval:

Typical consumption	0.10 μA
Maximal consumption	0.30 μA

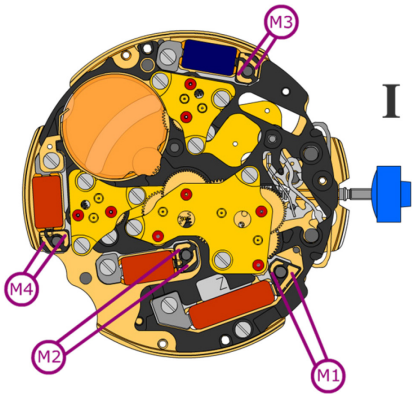


Coil resistance M1 **1.90 k Ω .. 2.20 k Ω**


Coil resistance M2 **2.20 k Ω .. 2.40 k Ω**

Coil resistance M3 **2.20 k Ω .. 2.40 k Ω**

Coil resistance M4 **2.20 k Ω .. 2.40 k Ω**

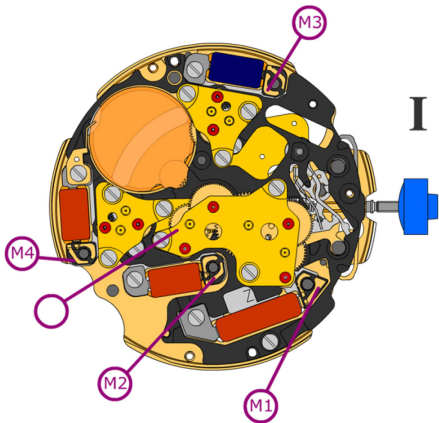

Coil isolation M1/M2/M3/M4 **∞ k Ω**

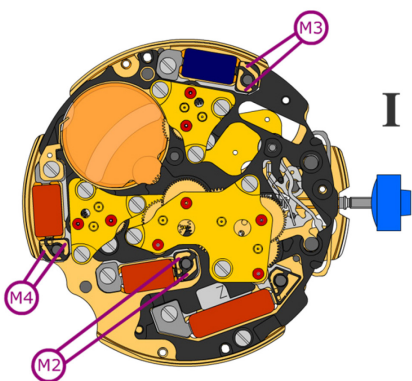

Signal generator (4.9 ms, 8 Hz):

Lower working voltage limit
M2/M3/M4 **1.30 V**