




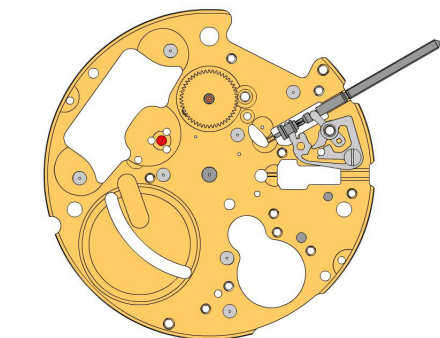

A

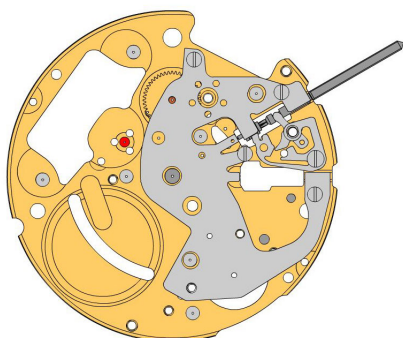


B

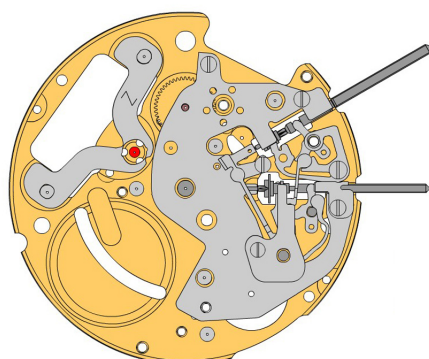


C


2000.627.G 1.		Main plate
3017.052 2.		Setting lever dual
3015.075 3.		Yoke dual Yoke dual held by 1 screw 4000.282.
4000.282 4.		Screw
3001.044 5.		Sliding pinion
3000.190.CO 6.		Handsetting stem dual
3315.018 7.		Friction spring
3301.277 8.		Hour wheel dual (Aig.1)

2130.167.CO 9.		Setting mechanism cover Setting mechanism cover tenue par 3 vis 4000.321. Parts 2130.167.CO and 3004.188 must be exchanged together.
4000.312 10.		Screw


3017.057 11.		Setting lever
3015.074 12.		Yoke (3 positions) Tensioning the spring arm.
3001.042.FI 13.		Sliding pinion
3000.189.CO 14.		Handsetting stem
2020.166 15.		Yoke bridge Yoke bridge held by 1 screw 4000.328.
4000.328 16.		Screw
2130.199 17.		Stem maintaining plate Stem maintaining plate held by 1 screw 4000.312.
4000.312 18.		Screw
3622.042 19.		Stator Mark [Z] on stator.

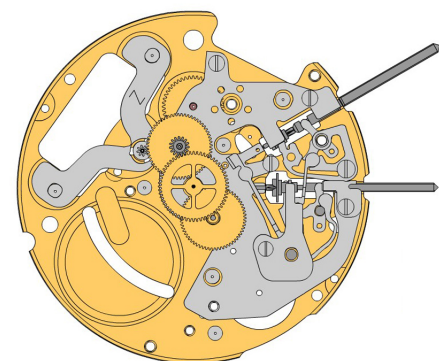

D

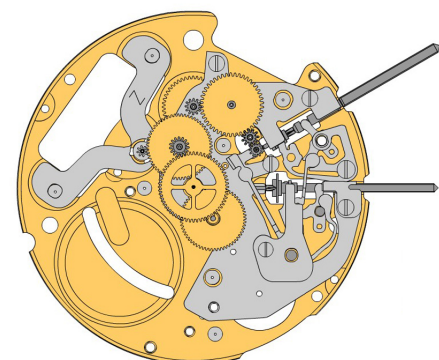

E

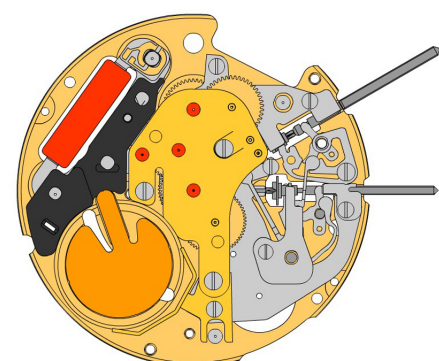


F


3715.103.RK 20.		Rotor
3147.056.CO 21.		Intermediate wheel
3122.059.CO 22.		Third wheel
3136.162.CO 23.		Center second wheel (Aig.1)

3305.313.FI 24.		Cannon pinion dual (Aig.1)
3004.185.CO 25.		Intermediate setting wheel dual
3004.198.FI 26.		Setting wheel dual
3007.074.CO 27.		Minute wheel dual

2020.180.G 28.		Train wheel bridge Train wheel bridge held by 3 screws 4000.279.
4000.279 29.		Screw
3601.117.G 30.		Battery clamp + Lateral bridle held by 1 screw 4000.244.
4000.244 31.		Screw
3621.060.RK 32.		Coil Attention: Please hold the coil only on the grey coil core.
3603.074 33.		Bridle (-) insulator
3603.075 34.		Battery insulator

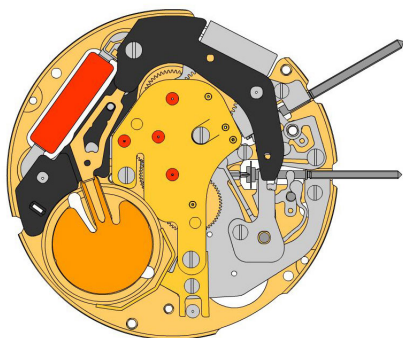


G

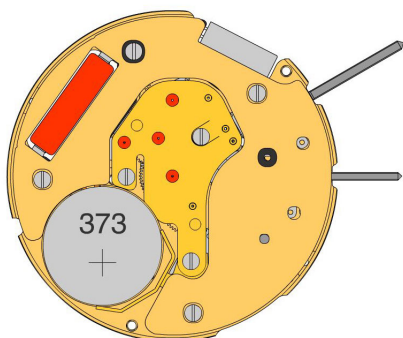


H


3601.116 35.		Bridle - Place bridle as shown on graphics.
3612.181 36.		Electronic module Electronic module held by 1 screw 4000.318. Electronic measurements may be realised now.
4000.318 37.		Screw
2130.168.G.M01.6203B 38.		Electronic module cover Electronic module cover held by 3 screws 4000.102.
4000.102 39.		Screw
3600.031.HGF 40.		Battery 373

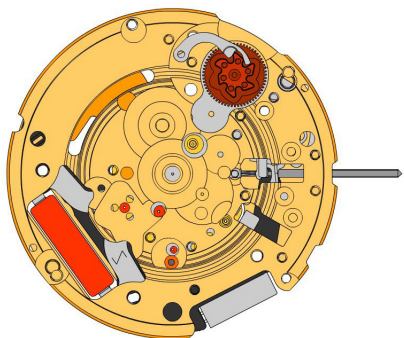

I

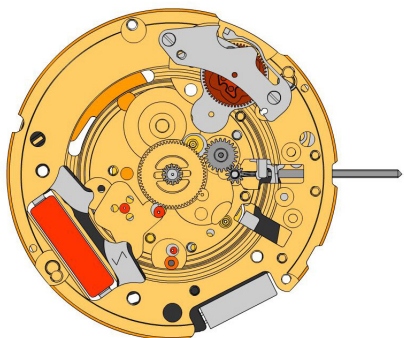

J

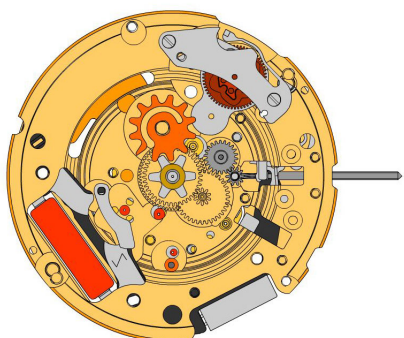


K


2000.627.G 41.		Main plate
3004.188 42.		Tens indicator driving wheel The short tooth of the tens indicator driving wheel must point to the center of the movement. Parts 2130.167.CO and 3004.188 must be exchanged together.
3500.060 43.		Tens jumper

2130.171 44.		Tens jumper maintaining plate Tens jumper maintaining plate held by 2 screws 4000.332. Tensioning the spring arm.
4000.332 45.		Screw
3004.182.FI 46.		Setting wheel
3004.183.FI 47.		Intermediate setting wheel
3305.308.CO 48.		Canon pinion driving wheel (Aig.1)

3007.081.CO 49.		Minute wheel
3301.273.CO 50.		Hour wheel (Aig.1)
3315.001 51.		Friction spring
3004.187 52.		Date indicator driving wheel
3500.061 53.		Date jumper

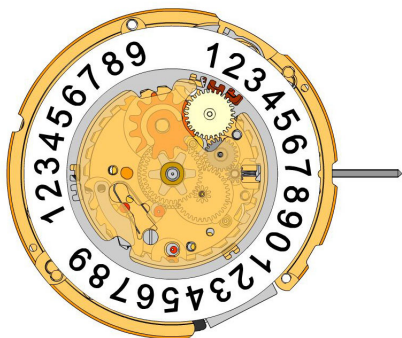

L

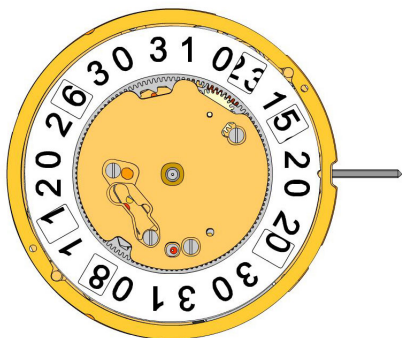

M

3504.217.AF.1.A
54.



Units indicator (standard)
Nick of the indicator at 3 o'clock.

3147.057
55.



Tens intermediate wheel

2130.169
56.



Date indicator maintaining plate
Date indicator maintaining plate held by 1 screw 4000.312.

4000.312
57.



Screw

3905.070
58.



Date jumper spring
Insert the date jumper spring in the provided opening.

3504.218.AF.1.A
59.



Tens indicator (standard)
Nick of the indicator at 3 o'clock.

2130.170.G
60.



Date mechanism maintaining plate
Date mechanism maintaining plate held by 3 screws 4000.312.

4000.312
61.



Screw

3506.075.G
62.



Dial support

8200
63.



Moebius 8200

9014
64.



Moebius 9014

124
65.




Jismaa 124

9020
66.




Moebius 9020

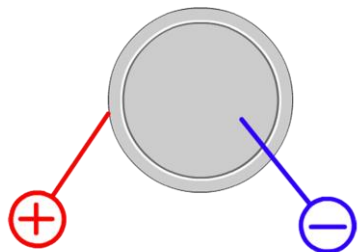

Battery

373

Voltage

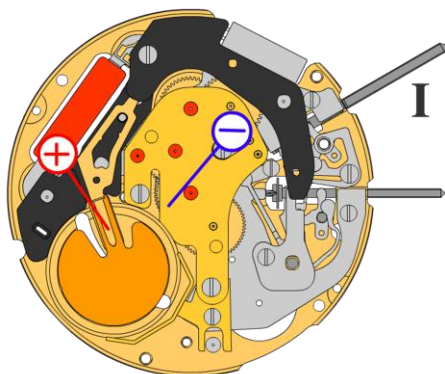1.55 V


*Setting stem in position I, calendar not in gear,
60 s measuring interval for rate and consumption:*

Typical consumption

0.96 μ A


Maximal consumption

1.85 μ A

Instantaneous rate

-10s/M. .. +20s/M.

Lower working voltage limit

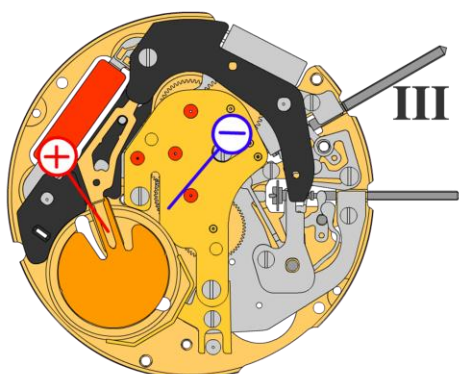1.30 V


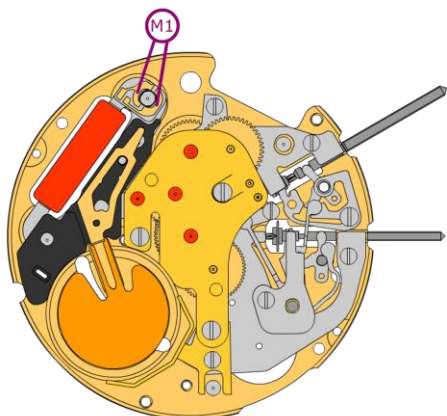
Setting stem in position III, 60 s measuring interval:

Typical consumption


0.10 μ A

Maximal consumption

0.30 μ A



Coil resistance M1

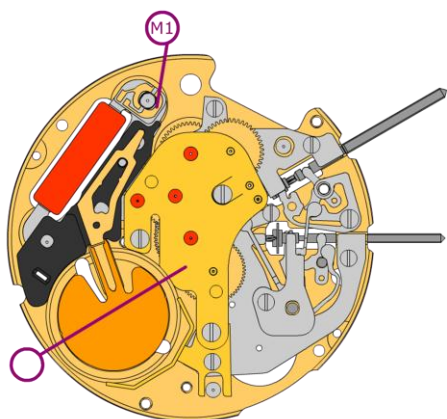1.61 k Ω .. 1.81 k Ω


Coil isolation M1

 ∞ k Ω